
Endurance® Wall Bunk Ladder

CORTECH



You will need:

Not Included:

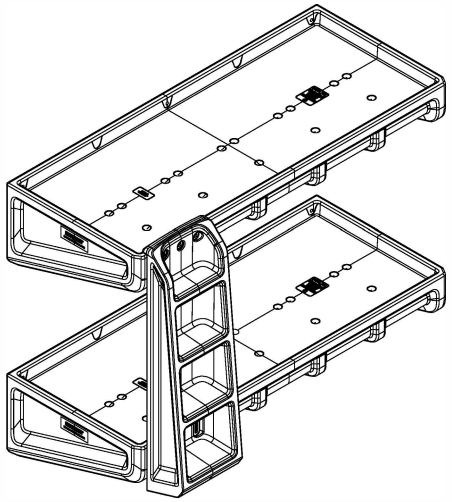

1x
Pencil For Marking
Bolt Locations




1x
Drill With 3/8"
Drill Bit



1x
Screwdriver With T40
Torx Bit



1x
Screwdriver With T45
Torx Bit



1x
Bar level or laser level

Included:




12x
3/8"Washer
0.4" ID 1.5" OD



6x
5/16"-18x2"
Security Torx Bolts




6x
3/8" OD x 3/4" Tamper
Resistant Binding Barrel



1x
Bunk Ladder


Endurance® Wall Bunk Ladder

1.

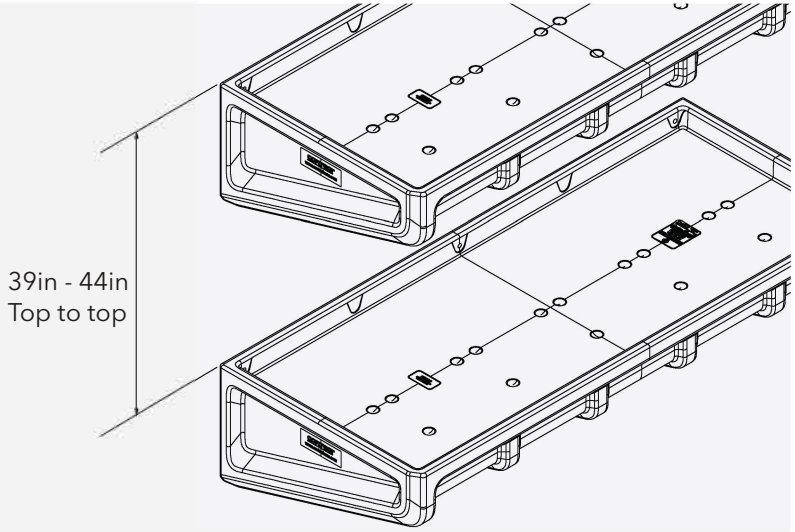


Before placing the ladder make sure the top edges of each bunk are spaced between 39 and 44 inches apart.

2.

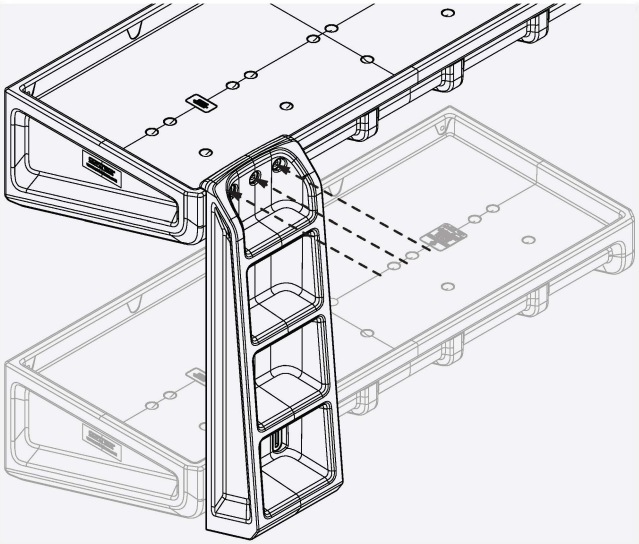


Align the bunk ladder to the end of the top wall bunk. Use the mounting holes to mark screw locations on the bunk.

3.

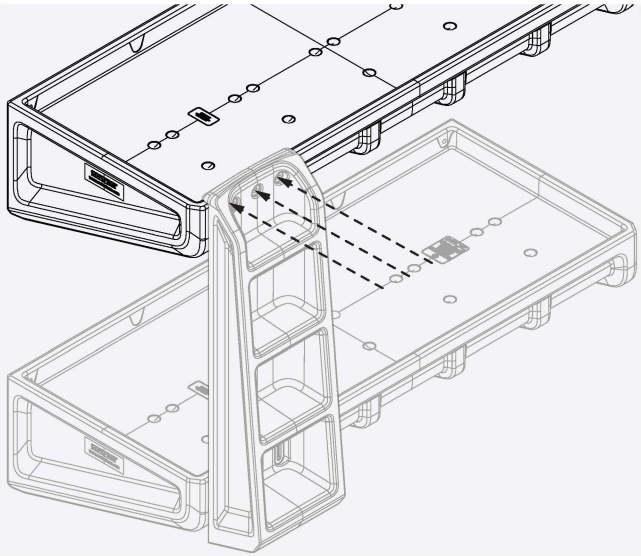

Remove the ladder and drill through the bunk side at marked location. Clear the holes of any dust and debris.


4.

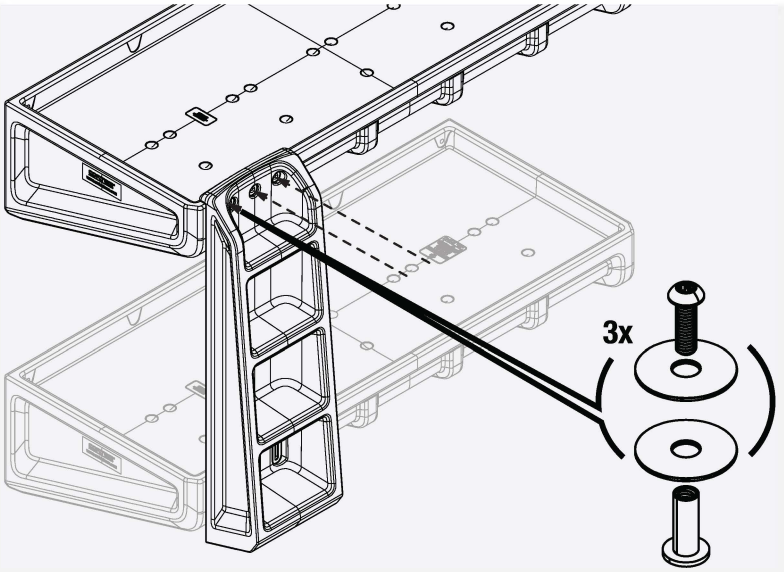

Replace bunk ladder and insert through bolt from the rear side so the head of the bolt is facing into the bunk. Secure each bolt on the opposite end using a binding barrel.


Endurance® Wall Bunk Ladder

5.

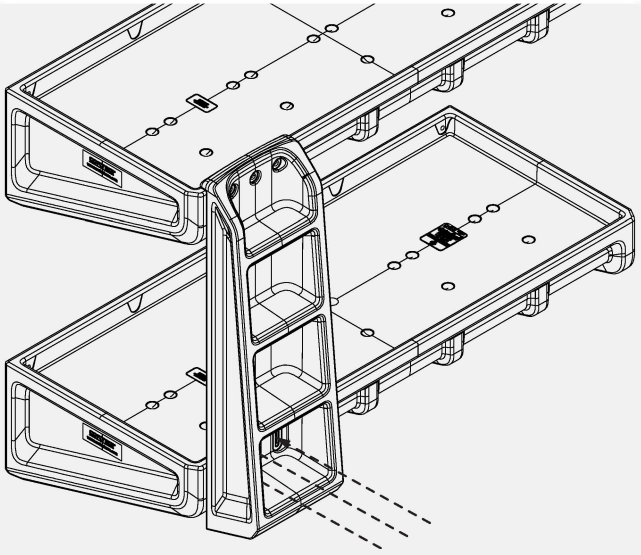

Use a level to mark drill points on the lower mounting channels. Drill through the ladder and bunk at marked locations. Clear holes of any dust and debris.

6.

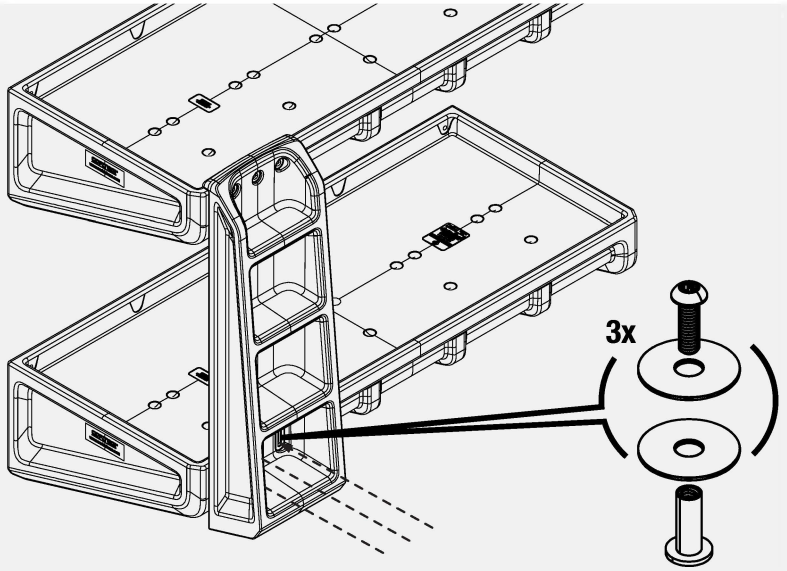

Insert through bolt from the rear side so the head of the bolt is facing into the bunk. Secure each bolt on the opposite end using a binding barrel.