
Anchor Table Installation

CORTECH



You will need:

Not Included:

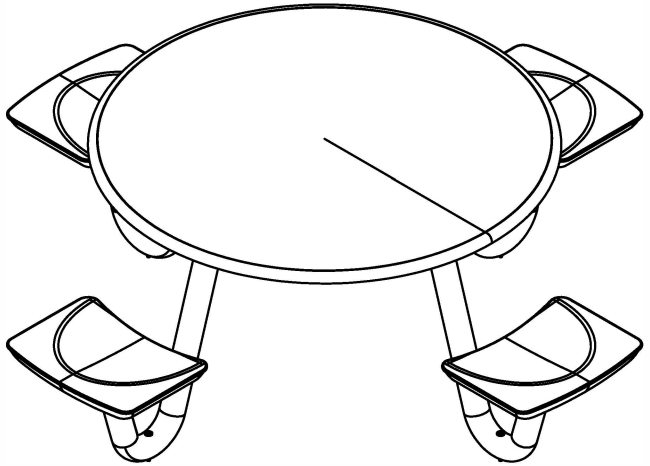

1x
Pencil
For Marking Floor




1x
Drill
With 3/8" Masonary Bit



1x
Screwdriver
With Tamper Resistant Torx Bit



4x / 6x / 8x
3/8" - 16 x 4"
Tamper Resistant Torx Screw



4x / 6x / 8x
3/8" Flat Washer
.406" ID .875" OD

Included:



32x / 48x / 64x
5/16" Washer
.344" ID .75" OD



32x / 48x / 64x
5/16" Split Lock Washer
.322" ID .583" OD




16x / 24x / 32x
5/16" - 18 x 3/4"
Security Torx Bolts




16x / 24x / 32x
5/16" - 18 x 1"
Security Torx Bolts



4x / 6x / 8x
Plastic Seat



4x / 6x / 8x
Metal Table Leg




1x
Table Top
Alternative Size & Shapes Available

Anchor Table Installation


CORTECH

1.

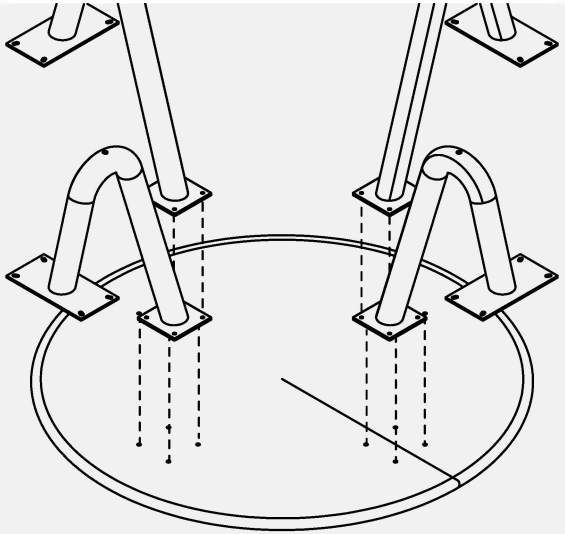


Align legs with table top inserts.
Check fitment and make any necessary adjustments.

2.

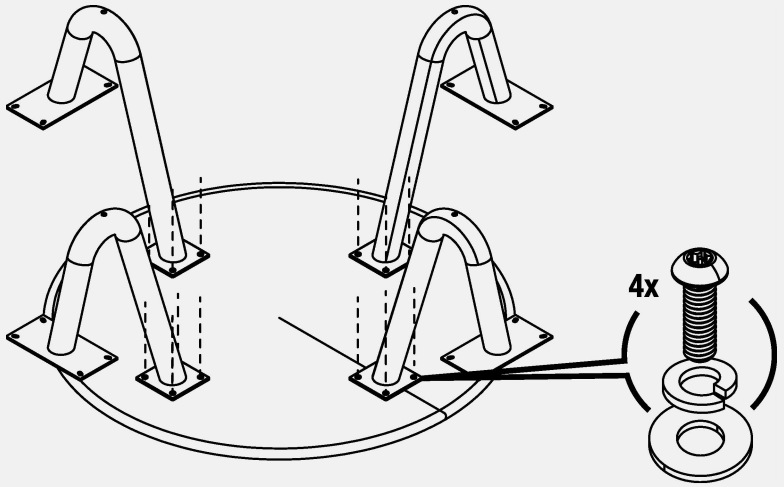


Insert and tighten each table top screw 3-5 turns past finger tight.

3.

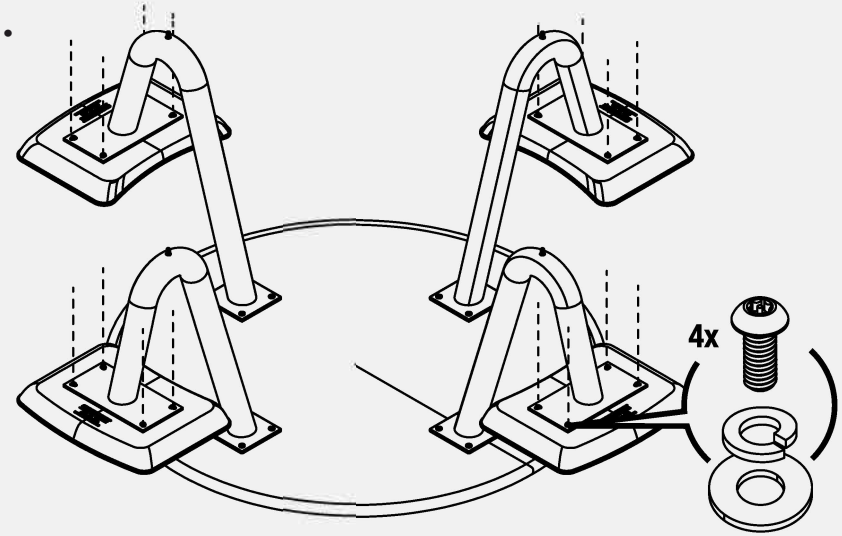

Align seat with leg plate.
Insert lock washer and tighten each seat screw 3-5 turns past finger tight.

4.

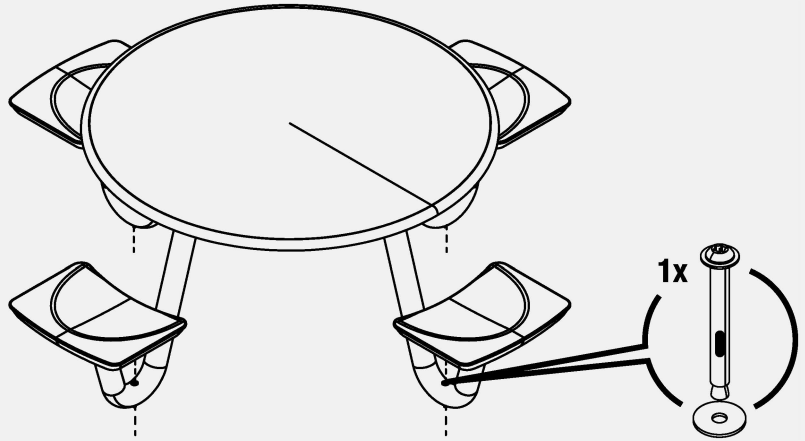

Turn over table, Position table in desired location. Using a pen or pencil, mark the leg mounting location onto the floor. Drill holes in the locations where you marked the center of the floor mount hole. Hole depth should be 2.0" deep MINIMUM. install concrete anchor and bolt table to floor.