4x mounting holes 3.20 mm, 4.00 mm from edges, non-plated

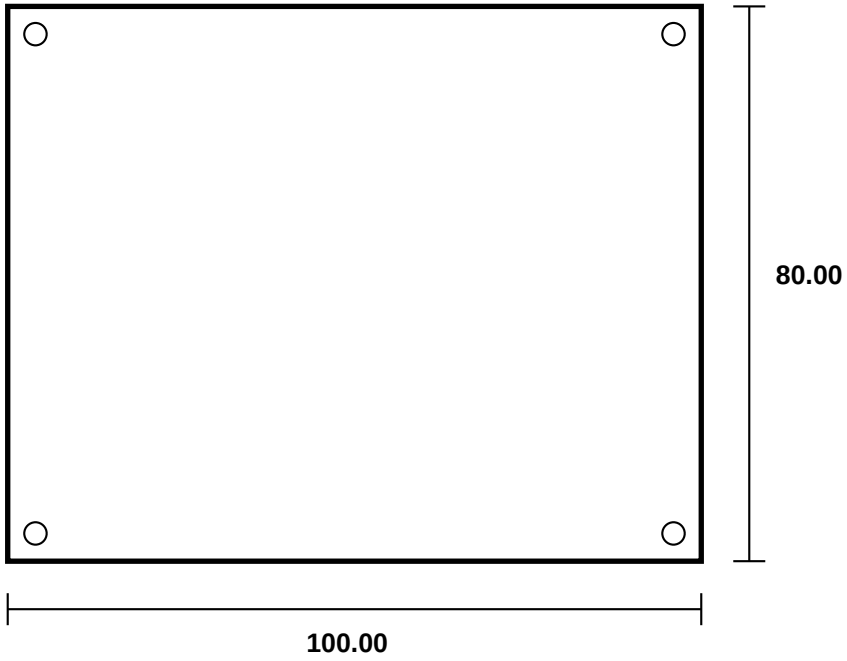

FABRICATION NOTES

1. Material: FR-4, Tg 170, halogen-free.
2. Layers: 4. Finished thickness: 1.60 mm +/-10%.
3. Copper: 1 oz outer, 1 oz inner, finished.
4. Surface finish: ENIG (Ni 3-6 um, Au 0.05-0.1 um).
5. Solder mask: green LPI, both sides. Silkscreen: white.
6. Min trace / space: 0.10 / 0.10 mm. Min drill: 0.25 mm.
7. Impedance: 50 ohm single-ended on L1 and L4, +/-10%.
8. Quality: IPC-6012 Class 2, 100% electrical test.
9. Quantity: 500 boards (125 panels of 2 x 2).
10. Export classification: Commercial (not ITAR/EAR).

STACK-UP (1.60 mm)

L1 Top	Signal 1 oz
Prepreg	0.20 mm
L2	GND plane 1 oz
Core	1.00 mm
L3	PWR plane 1 oz
Prepreg	0.20 mm
L4 Bottom	Signal 1 oz

Panel: 2 x 2 array, 5.0 mm rails, V-score between boards, 3 fiducials

SKYLINE ROBOTICS

FC-100 Flight controller board

Fabrication drawing - Rev A - sheet 1/1

Units: mm Tolerance: +/-0.10 unless noted

Demo file for HT Global Circuits RFQ

Fictional data - for demonstration only