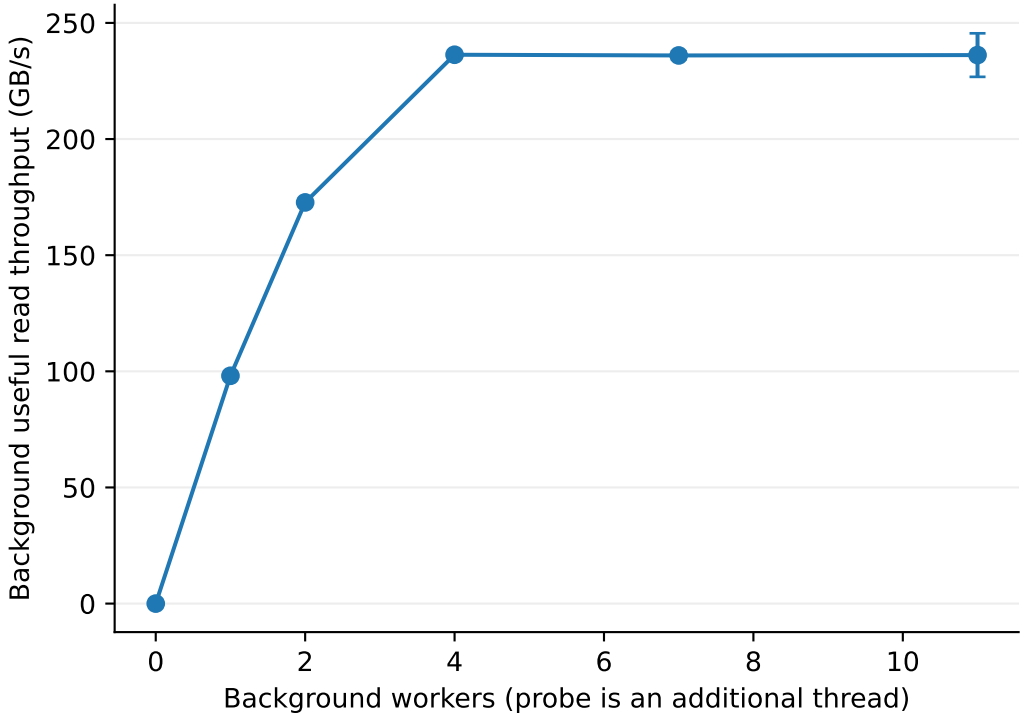
Background useful read throughput (GB/s)
0
50
100
150
200
250
0
2
4
6
8
10
Background workers (probe is an additional thread)

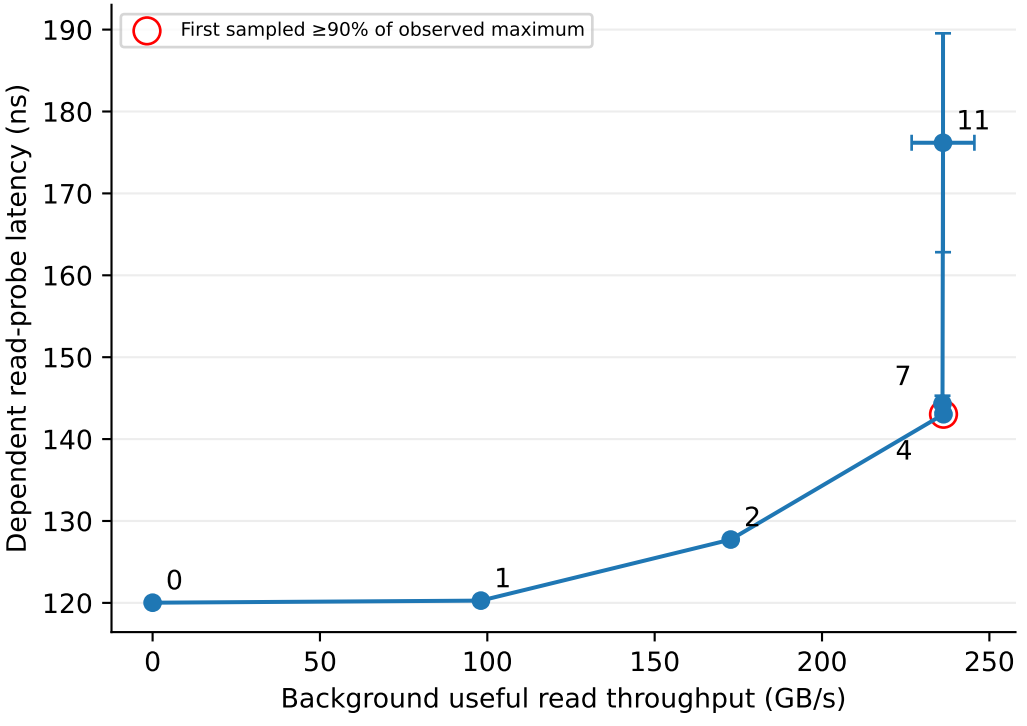
First sampled ≥90% of observed maximum
Dependent read-probe latency (ns)
120
130
140
150
160
170
180
190
0
50
100
150
200
250
Background useful read throughput (GB/s)
0
1
2
4
7
11