Data Specs

18650 Battery Holder 3-Cells

High Quality Plastic Holder for 18650 battery. Hold 3-cells in series connection with cable.

SKU: ASS1062

Brief Data:

- Battery Type: 18650.
- Number of Cells: 3.
- Color: Black.
- Connection: Series.
- Wire Length: 76mm.
- Dimensions: 75x61x21 mm.

CamScanner

Mechanical Dimension:

Unit: mm

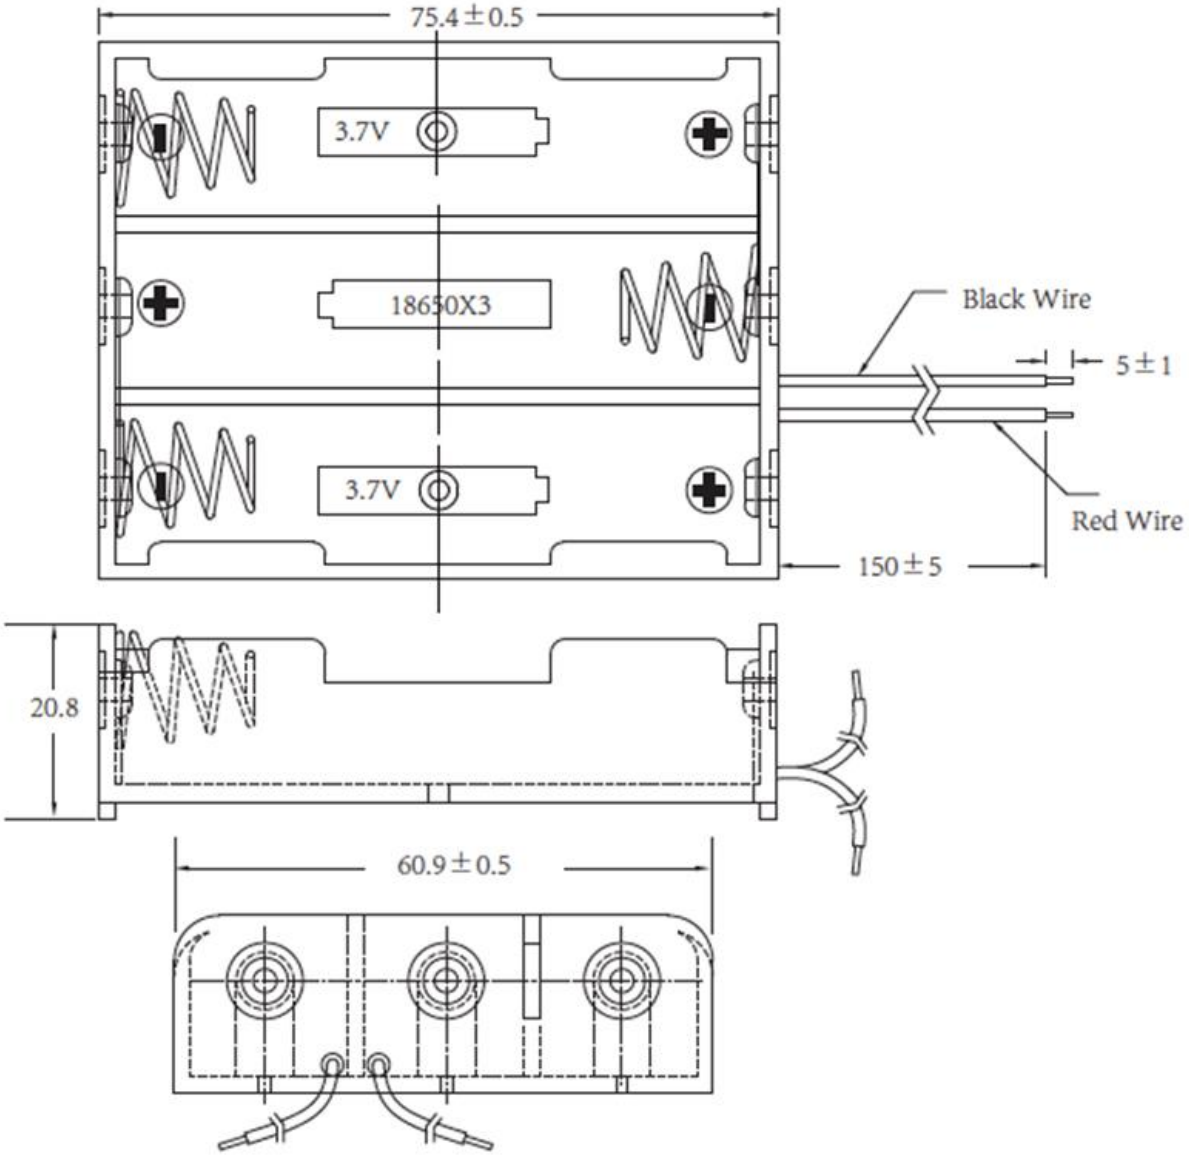

Dimensions : Millimetres

www.handsontec.com
CamScanner

RAM Electronics
Integrated Solution in Our Place

RAM Electroncs: Comprehensive 18650 Battery Pack & System Specs

Voltage = **3.7 V Nominal** (11.1 V 3S Pack)
Weight = ~45 g per cell (x3 for pack)
Capacity = 2000 mAh (Verified in-cart type, not generic 'up to')
Chemistry = Lithium ion (Non-protected cells for BMS)
Charge cycles = 300 - 500
Diameter = 18 mm
Height = 65 mm (x3 inline in holder)

CRITICAL MISMATCH AND FIXED COMPONENTS

✗ **Mismatched:**
3xAAA Holder (from cart)

✓ **CORRECTED:**
3x18650 Serial Holder

✓ **REQUIRED:**
3S 12.6V Type-C BMS
(e.g., from original cart)

WIRING & ASSEMBLY GUIDELINES

1. **Verify all 3 cells** are equal voltage (~3.7V) before pack assembly.
2. Solder B-, B1, B2, B+ connections **precisely** as shown on BMS board.
3. **Calibrate Step Down (LM2596HVS)** with Voltmeter **BEFORE** connecting your device.

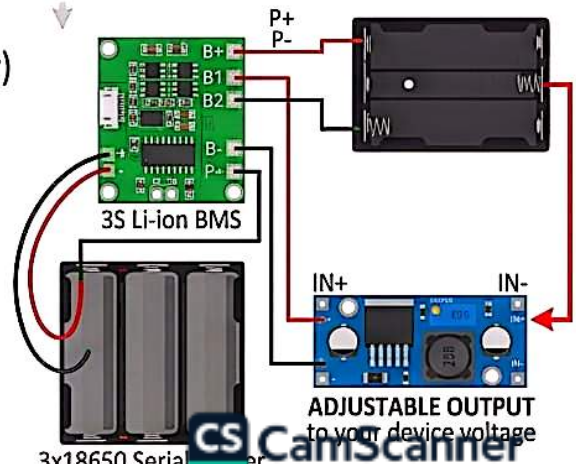

B- to Neg 1; B1 to Pos 1/Neg 2; B2 to Pos 2/Neg 3; B+ to Pos 3

CamScanner

DC-DC Step ...
m-e-shop.com

RAM® Electronics
Integrated Solutions at One Place

DEDICATED BUILD SHEET - 12V Battery Pack System

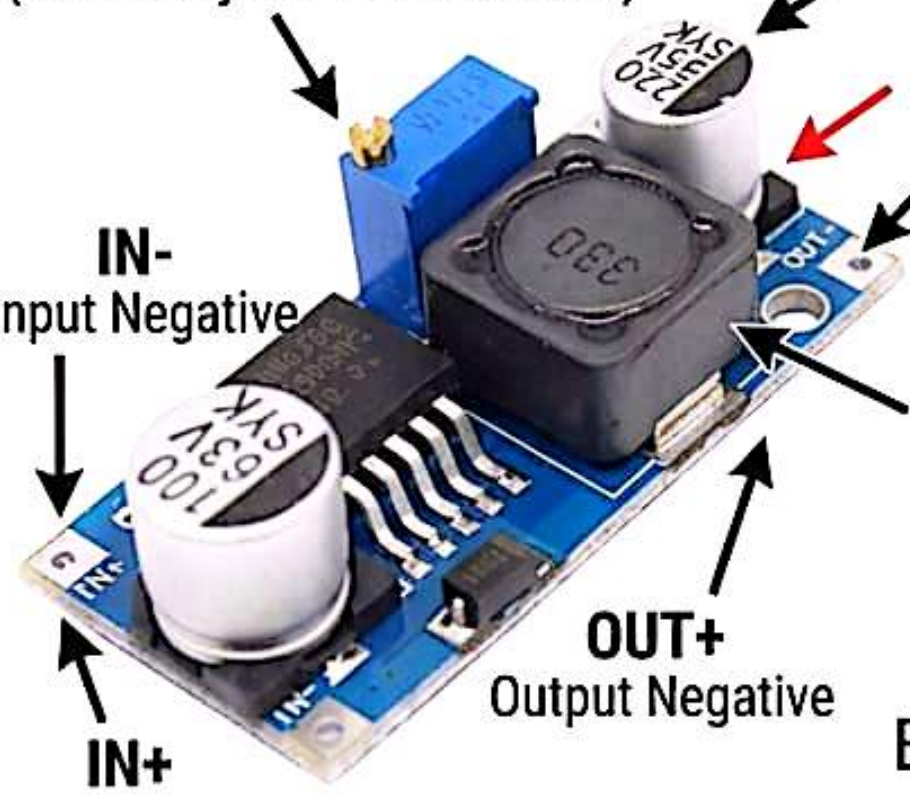

Efficiency: Up to 92%
Low Dropout Voltage: 1.5V

WIRING & CALIBRATION GUIDE

① INPUT SETUP

3x18650 Battery
(3x18650 Batty Pack)

BMS board
(previous discussions)

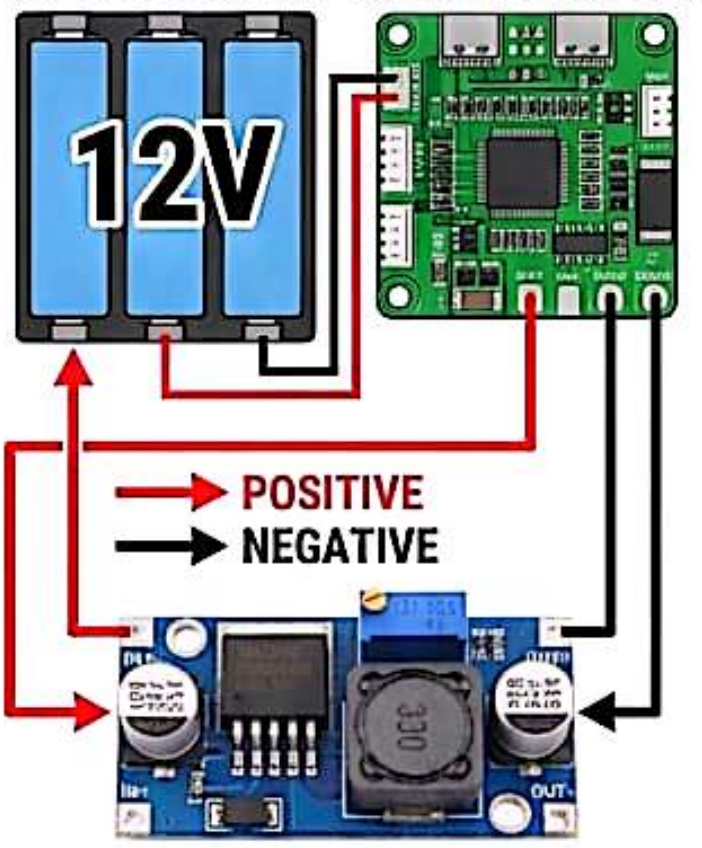

LM2596HVS

② OUTPUT ADJUSTMENT

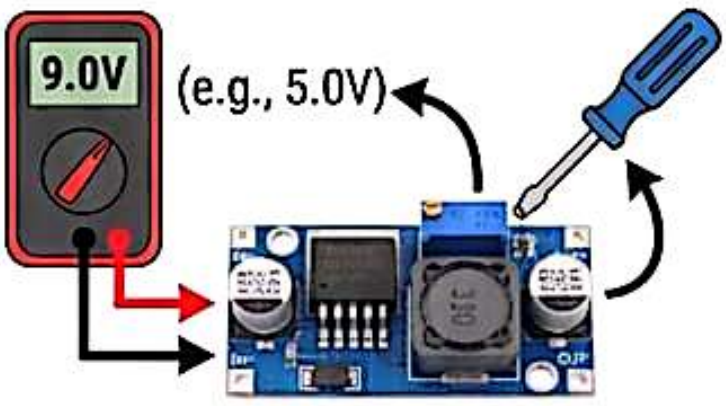

DO NOT CONNECT YOUR DEVICE YET! ⚠

FIRST, ADJUST POTENTIOMETER UNTIL VOLTMETER SHOWS YOUR DEVICE VOLTAGE (e.g., 9V or 5V).

Verify your device draws <2A sustained current.

- 18650 2000mAh cells (x3, Serial)
- 3S 12.6V Type-C BMS
- 3x18650 Serial Holder
- LM2596HVS Step Down Module

B- to Neg 1; B1 to Pos 1/Neg 2; B2 to Pos 2/Neg 3; B+ to Pos 3

CamScanner

RAM® Electronics
Integrated Solutions at One Place

RAM Electronics
Integrated Solutions at One Place

Li - 3S (12.6V)

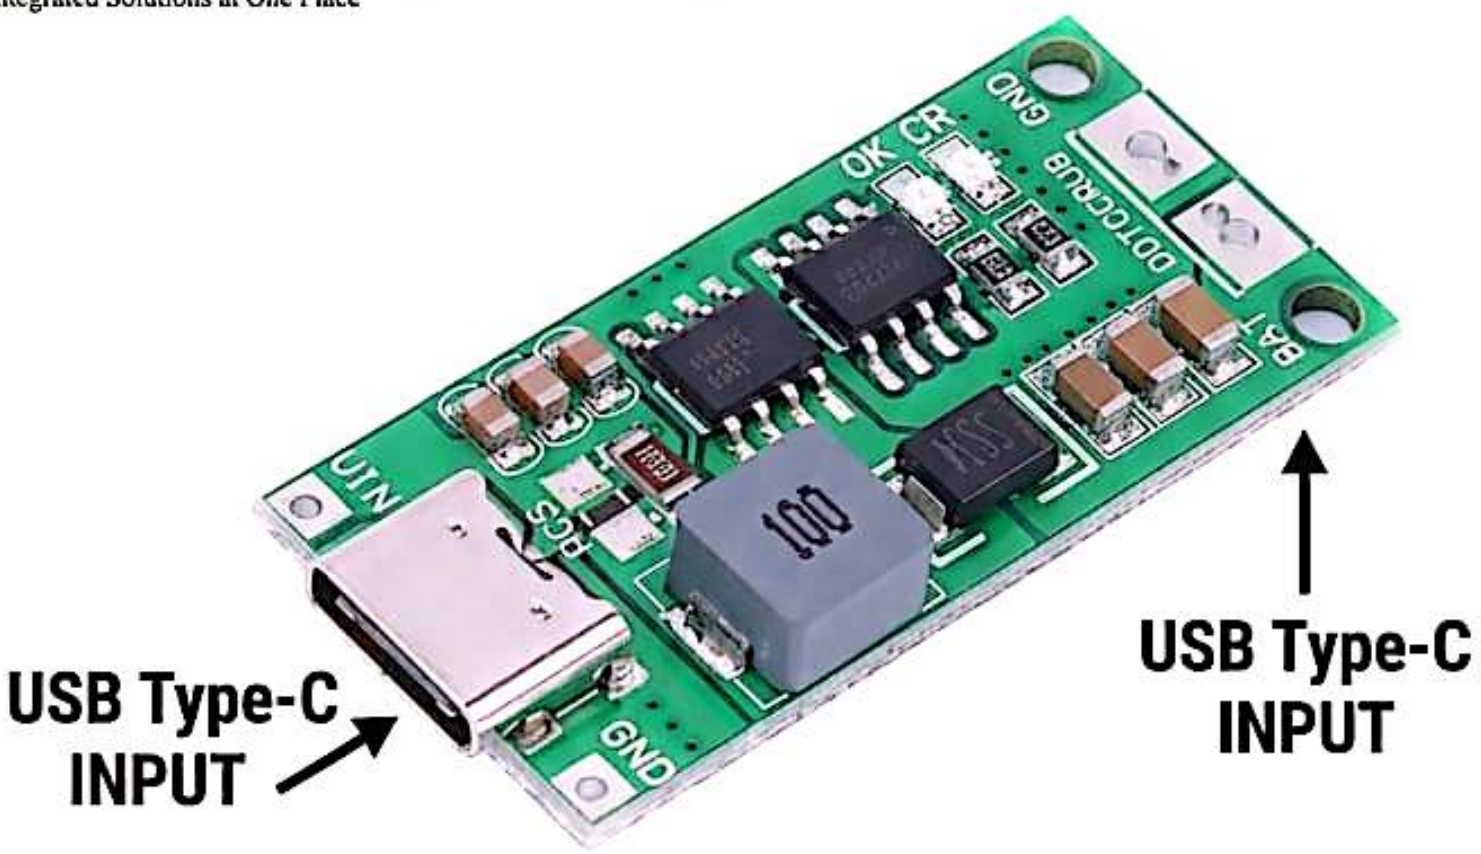

- **Specifications:** 3S (3 cells in series)
- **Input:** 5V USB Type-C (2A minimum)
- **Final Charging Voltage:** 12.6V (4.2V per cell)
- **Charging Method:** CC/CV boost converter
- **Max Charging Current:** 2A
- **Indicators:** 'CR' for Charging, 'OK' for Full-charge
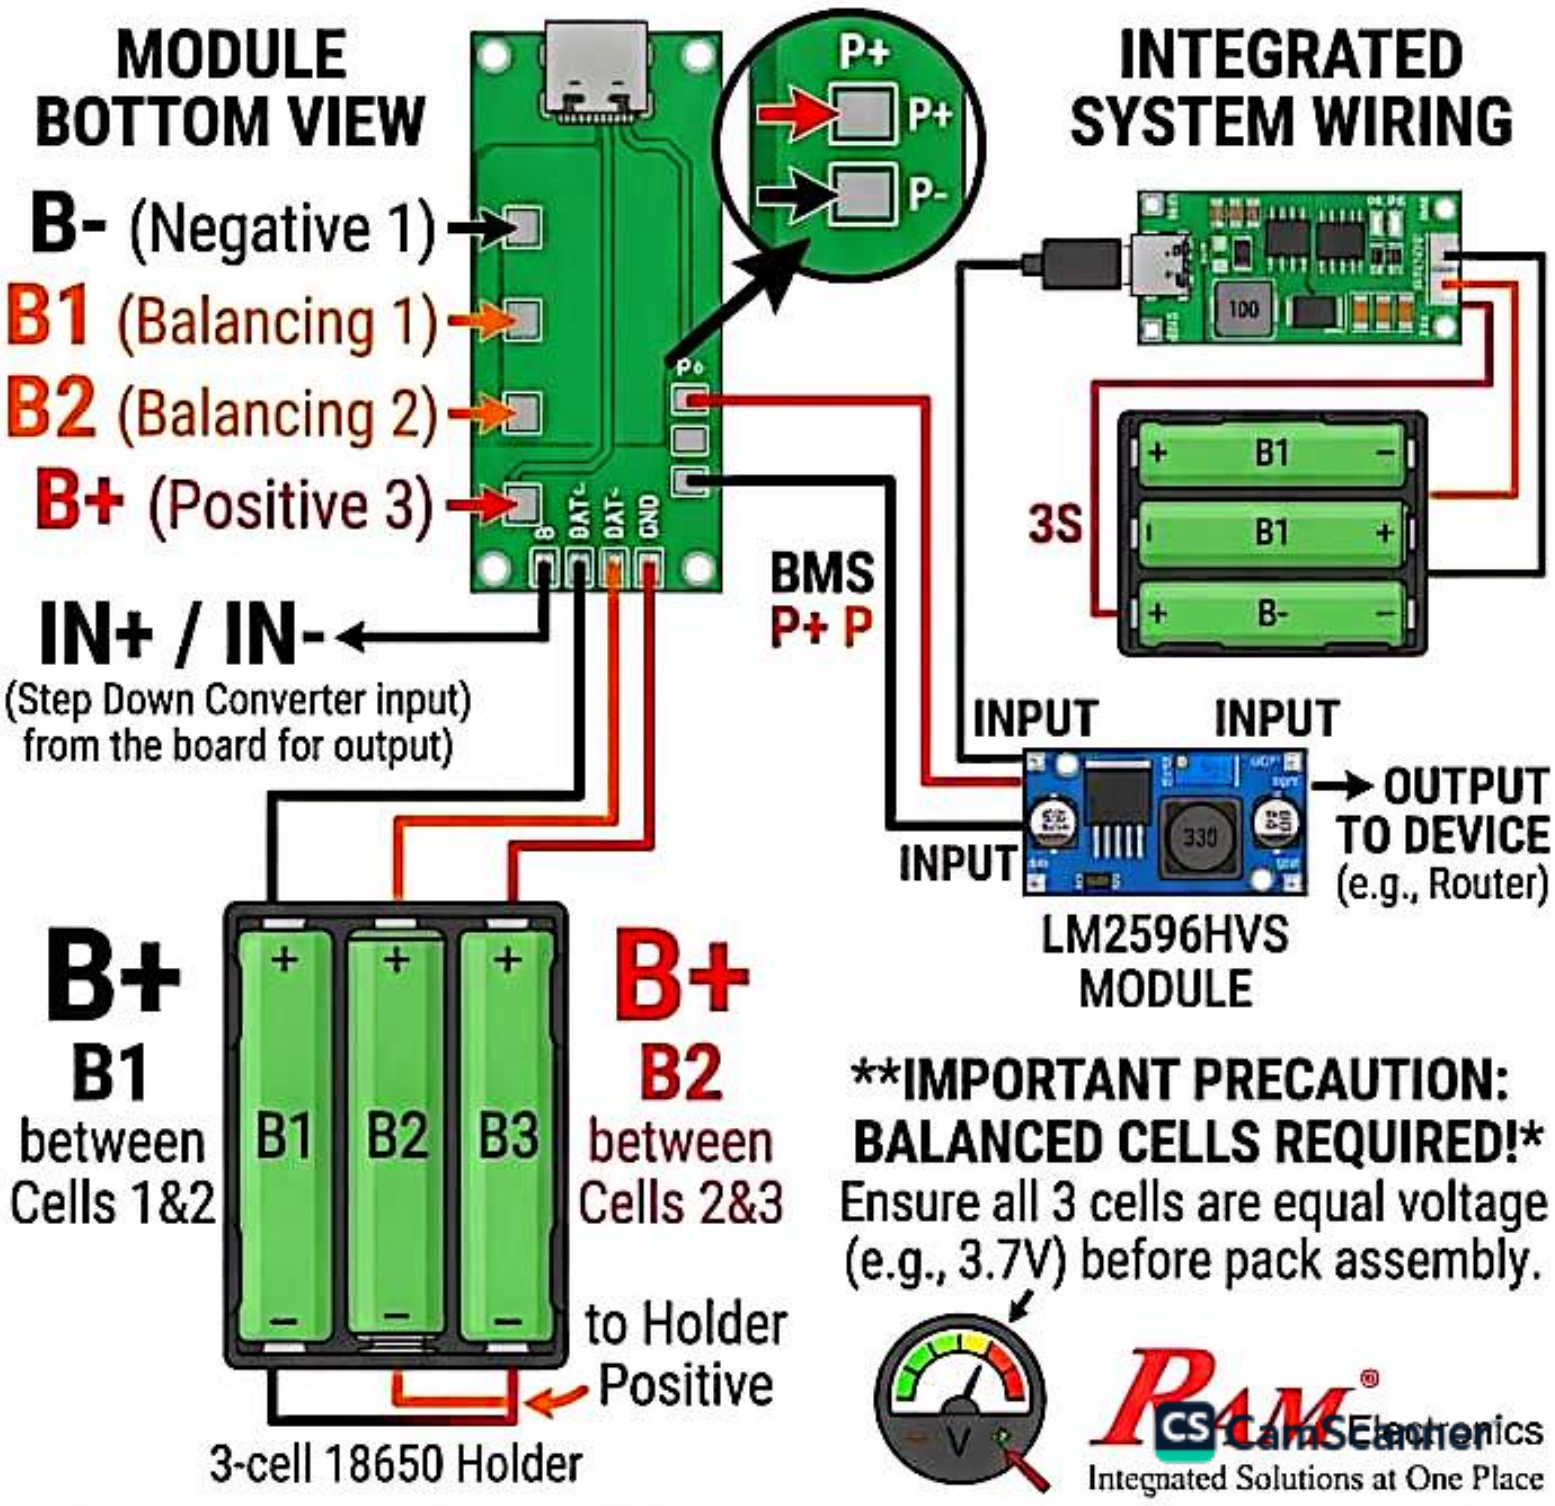
PINOUT & WIRING DIAGRAM