HSF RoHS

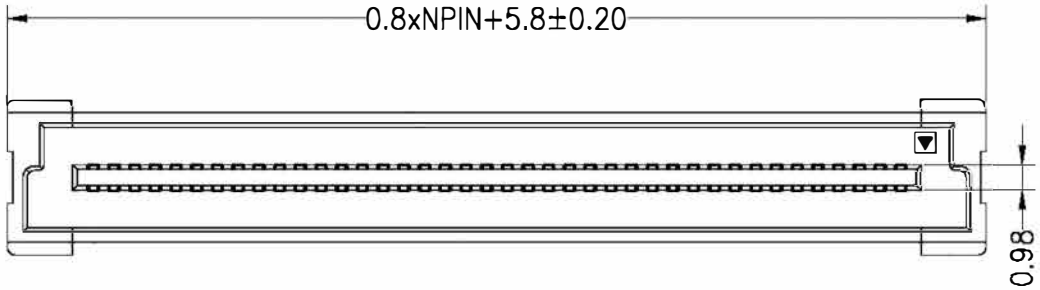

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

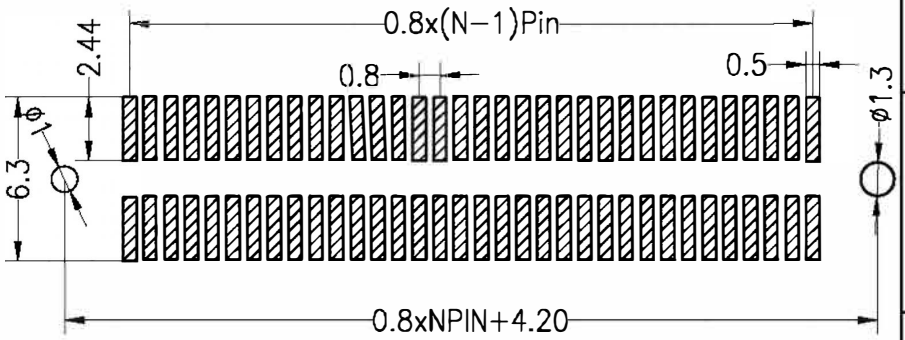

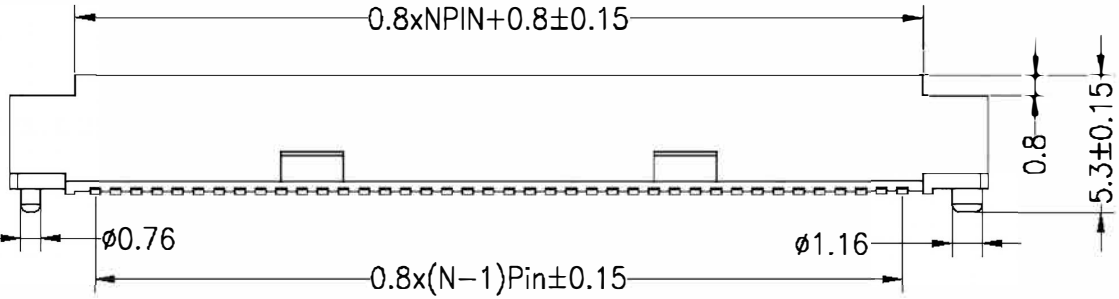



SPECIFICATIONS
PERFORMANCE
Electical Rating: AC/DC 50V 0.5A
Insulation Resistance: 500MΩ
Withstang Volt: 200V AC/minute
Opratng Temperature: -40°to+105°
Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP

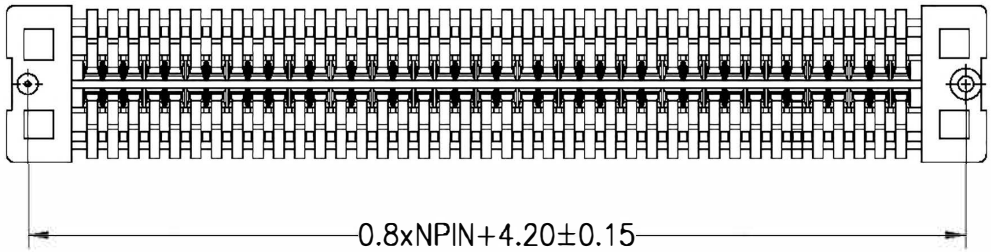

Ordering Information

3710 M XXX 046 XX F X 01

- M: F=Female, M=Male
- XXX: No.of pins 60,80 100,140P
- 046: Plastic Hight 046=4.6mm
- XX: Contact Plating G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin
- X: Packing T:Tube R:Reel

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

OPERATION	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW	BEN	12.03.28
CHECK		
APPROVE		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	3710MXXX046XXFX01
TITLE:	0.80BTB NPin H4.60 Male