


Power

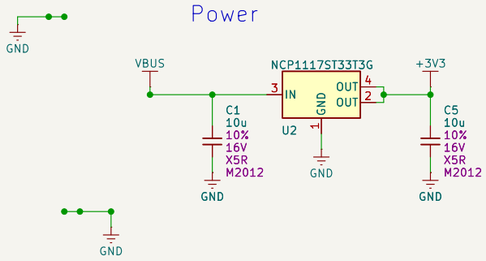

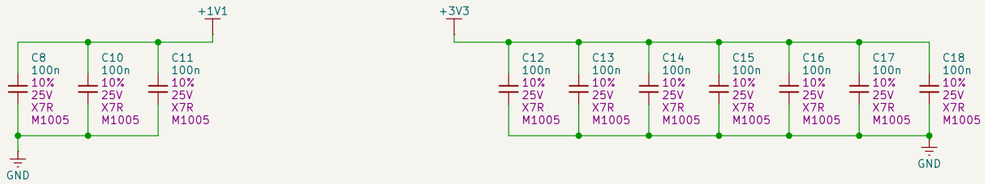


Flash

If using RP2354 (internal flash), remove R10.
R9 can be fit to use U3 as secondary memory.

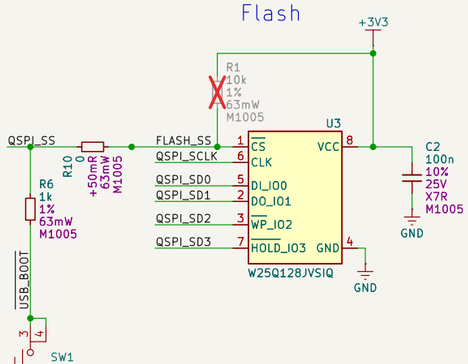


BOOTSEL Button

12MHz Crystal

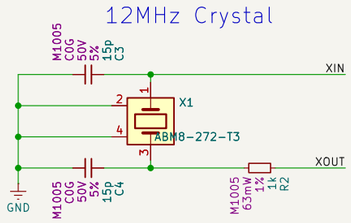


Link



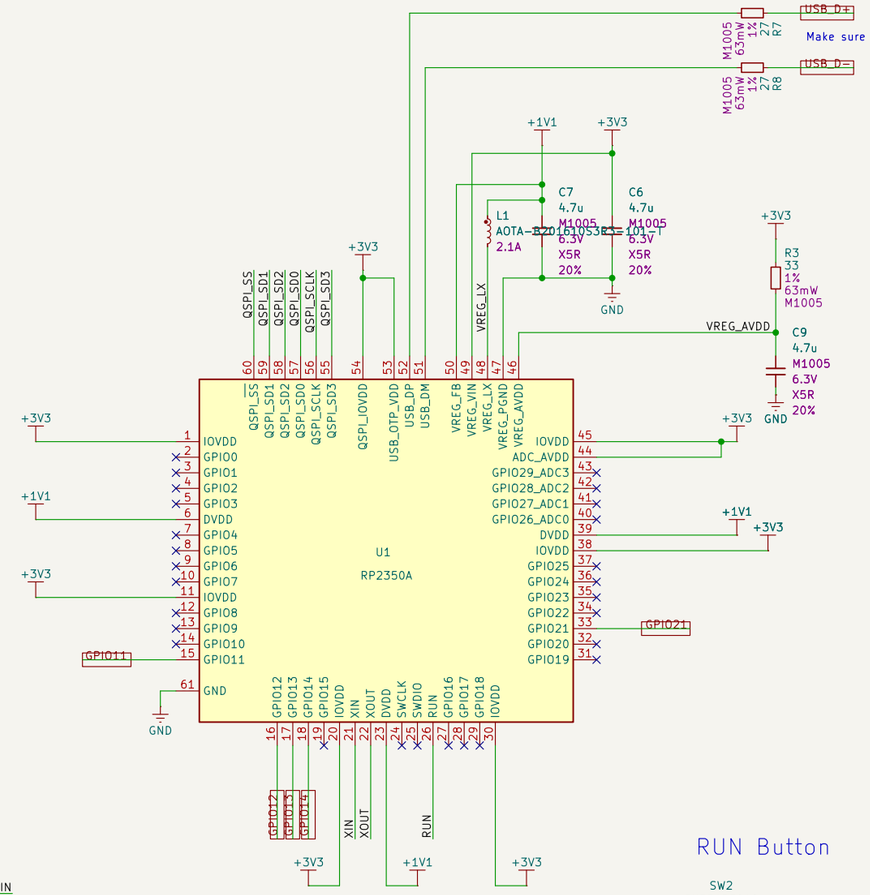


IOs

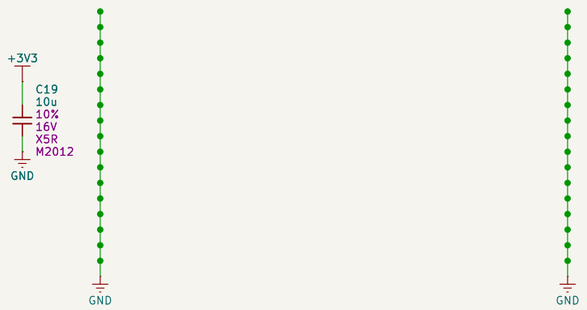

JST Debug Connector

RUN Button



Note: S1 schematic revision indicates that this is the 1st revision of the schematic/BOM associated with the R4 PCB.
R4-S1 therefore uniquely identifies the fully built PCB Assembly (PCBA).
This is a change from the previous revision numbering to align with the internal Raspberry Pi product revisioning scheme

VARIANT	VARIANT1
REF:	RPI-RP2350A-MINIMAL
DESCR:	RP2350A QFN-60 Minimal Design Example

SCHEMATIC/BOM REVISION: S1


BOM is autogenerated from schematic, therefore schematic rev. == BOM rev. Keep Titleblock rev. in sync with above. Reset to 1 when creating new R num.

PCB/PWB REVISION: R4 <- PCB/PWB rev this schematic is for

MANUFACTURER: XXX
MANUF. PN: XXX
CIRCUITS/PANEL: XXX
DESCRIPTION: XXX

Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026

TITLE	qb-link-usb rev A (core: Raspberry Pi RP2350A minimal design R4, MIT)				
DATE	2026-07-03	REF	RPI-RP2350A-MINIMAL_R4	REV	S1
SIZE	A3	DRAWN	Mike Stimson	SHEET	1/2



R101




5.1k

R102




5.1k

U101



USBLC6-2SC6

U102




SN74LVC1T45DBVR

R103




100k

U103



SN74LVC1T45DBVR

U104



SN74LVC1T45DBVR

C101



100n

C102



100n

C103



100n

C104



100n

C105



100n

C106



100n

R104

220

R105

220

R106

1k

R107

100k

R108

100k

C107




100p

C108



100p

U105



TPD4E05U06DQAR

J102



Link cable

D101



green

R109

100

PWR_FLAG



PWR_FLAG



Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026

TITLE	Link: USB-C, 5 V link buffers, cable pads				
DATE	Generated by RSC/tools/gen_sheet.py from link.json.			REV	0: hand-edit.
SIZE	A3	DRAWN		SHEET	2/2