


Power

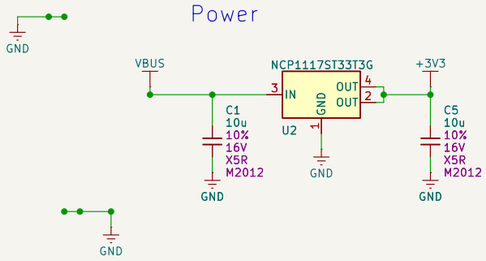

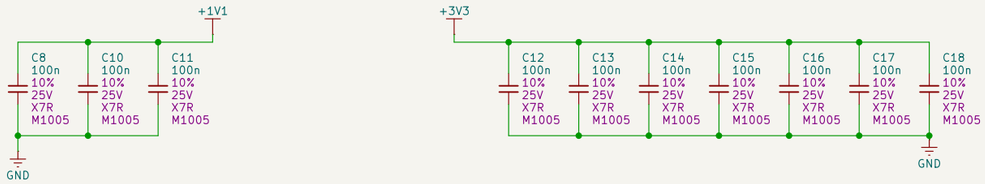


If using RP2354 (internal flash), remove R10.
R9 can be fit to use U3 as secondary memory.

Flash

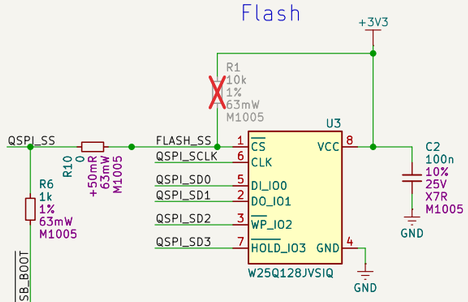


BOOTSEL Button

RP2350A

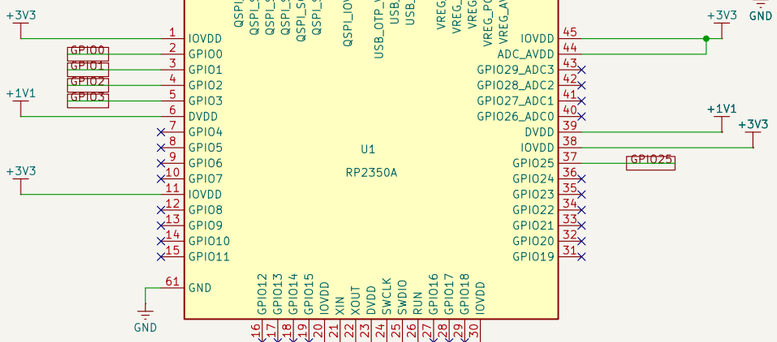


IOs

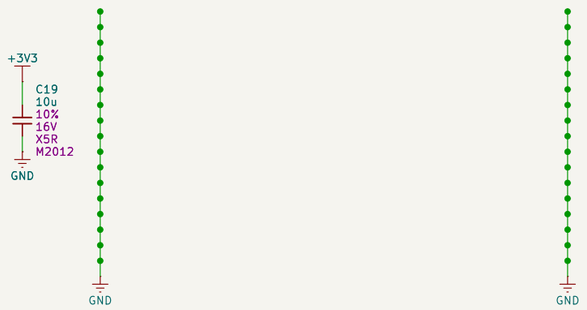


JST Debug Connector


Link



12MHz Crystal

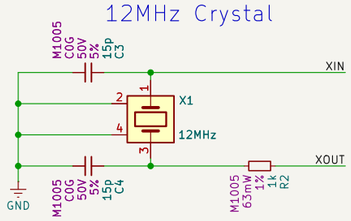

RUN Button





Note: S1 schematic revision indicates that this is the 1st revision of the schematic/BOM associated with the R4 PCB.
R4-S1 therefore uniquely identifies the fully built PCB Assembly (PCBA).
This is a change from the previous revision numbering to align with the internal Raspberry Pi product revisioning scheme

VARIANT	VARIANT1
REF:	RPI-RP2350A-MINIMAL
DESCR:	RP2350A QFN-60 Minimal Design Example

SCHEMATIC/BOM REVISION: S1


BOM is autogenerated from schematic, therefore schematic rev. == BOM rev.
Keep Titleblock rev. in sync with above.
Reset to 1 when creating new R num.

PCB/PWB REVISION: R4 <- PCB/PWB rev this schematic is for

MANUFACTURER: XXX
MANUF. PN: XXX
CIRCUITS/PANEL: XXX
DESCRIPTION: XXX


Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026


TITLE	gb-link-usb rev A (core: Raspberry Pi RP2350A minimal design R4, MIT)				
DATE	2026-07-03	REF	RPI-RP2350A-MINIMAL_R4	REV	S1
SIZE	A3	DRAWN	Mike Stimson	SHEET	1/2




























































Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026

TITLE	Link: USB-C, 5 V link buffers, cable pads				
DATE	Generated by RSC/tools/gen_sheet.py from link.json.			DEV	no hand-edit.
SIZE	A3	DRAWN		SHEET	2/2