


Power

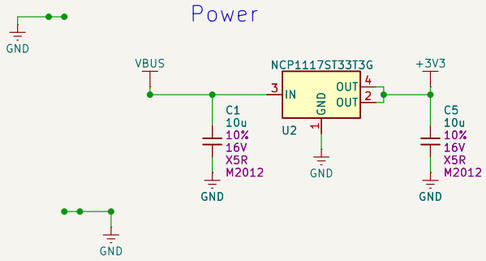

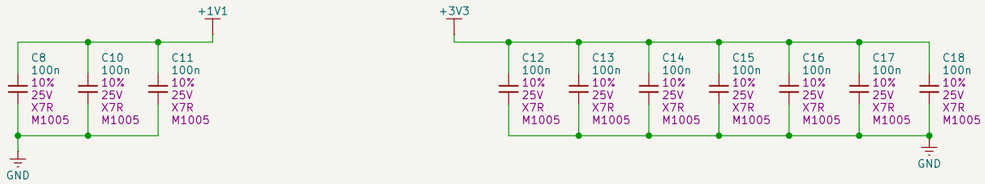


If using RP2354 (internal flash), remove R10.
R9 can be fit to use U3 as secondary memory.


Flash

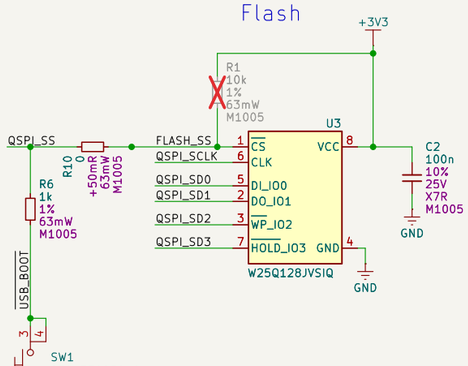


BOOTSEL Button

IOs

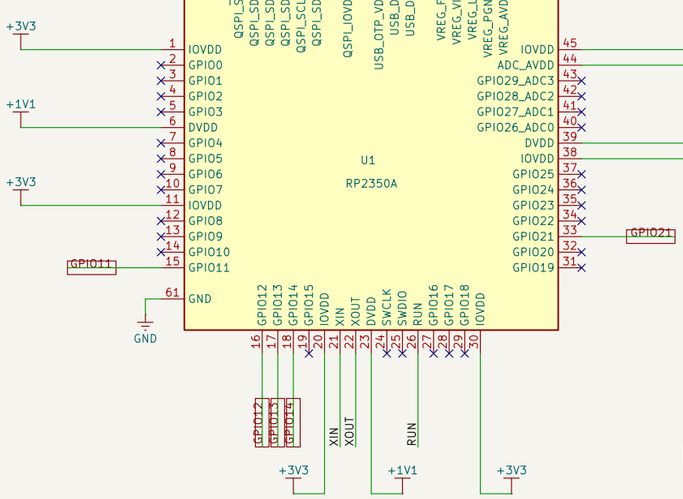

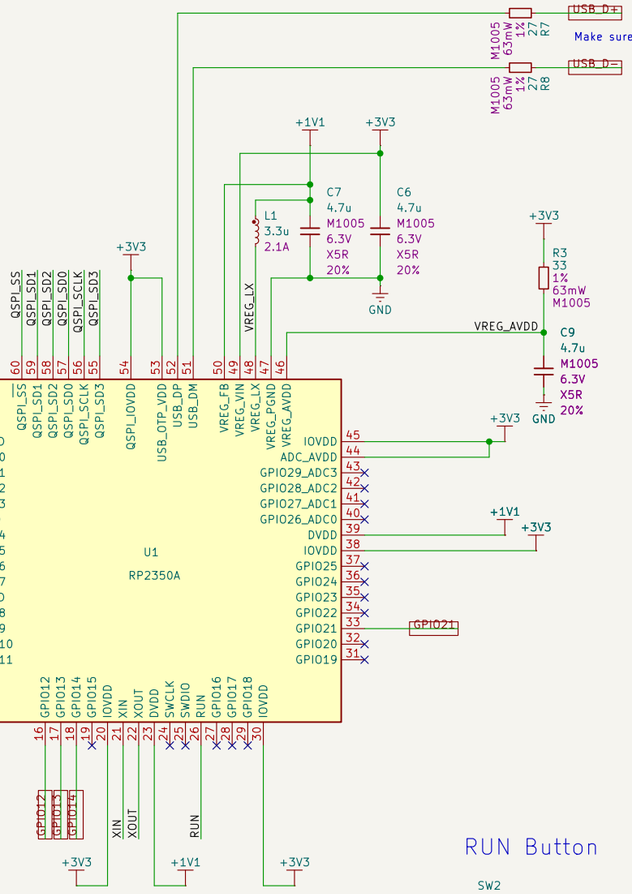


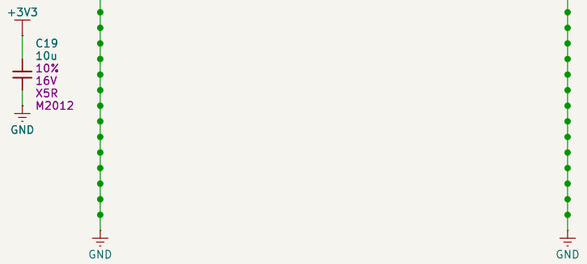

JST Debug Connector




Link




File: link.kicad_sch

12MHz Crystal

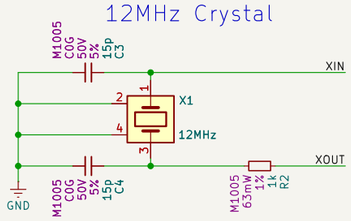

RUN Button



Note: S1 schematic revision indicates that this is the 1st revision of the schematic/BOM associated with the R4 PCB.
R4-S1 therefore uniquely identifies the fully built PCB Assembly (PCBA).
This is a change from the previous revision numbering to align with the internal Raspberry Pi product revisioning scheme

VARIANT	VARIANT1
REF:	RPI-RP2350A-MINIMAL
DESCR:	RP2350A QFN-60 Minimal Design Example

SCHEMATIC/BOM REVISION: S1


BOM is autogenerated from schematic, therefore schematic rev. == BOM rev. Keep Titleblock rev. in sync with above. Reset to 1 when creating new R num.

PCB/PWB REVISION: R4 <- PCB/PWB rev this schematic is for

MANUFACTURER: XXX
MANUF. PN: XXX
CIRCUITS/PANEL: XXX
DESCRIPTION: XXX


Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026


TITLE	gb-link-usb rev A (core: Raspberry Pi RP2350A minimal design R4, MIT)				
DATE	2026-07-03	REF	RPI-RP2350A-MINIMAL_R4	REV	S1
SIZE	A3	DRAWN	Mike Stimson	SHEET	1/2






















































Raspberry Pi
www.raspberrypi.com
© Raspberry Pi 2026

TITLE	Link: USB-C, 5 V link buffers, cable pads				
DATE	Generated by RSC/tools/gen_sheet.py from link.json.			REV	no hand-edit.
SIZE	A3	DRAWN		SHEET	2/2