Small Signal Schottky Diode

Features

- For general purpose applications
- This diode features very low turn-on voltage and fast switching.
- This device is protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges.
- This diode is also available in the DO-35 case with the type designation BAT46 and in the MiniMELF case with the type designation LL46.
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC

Pb-free

e3

RoHS COMPLIANT



17431

Mechanical Data

Case: SOD-123

Weight: approx. 10.3 mg

Packaging Codes/Options:

GS18/10 k per 13" reel (8 mm tape), 10 k/box

GS08/3 k per 7" reel (8 mm tape), 15 k/box

Parts Table

Part	Ordering code	Type Marking	Remarks
BAT46W-V	BAT46W-V-GS18 or BAT46W-V-GS08	L6	Tape and Reel

Absolute Maximum Ratings

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Repetitive peak reverse voltage		V_{RRM}	100	V
Forward continuous current		I_F	150[1)]	mA
Repetitive peak forward current	t_p < 1 s, δ < 0.5	I_{FRM}	350[1)]	mA
Surge forward current	t_p < 10 ms	I_{FSM}	750[1)]	mA
Power dissipation[1)]	T_{amb} = 65 °C	P_{tot}	150[1)]	mW

[1)] Valid provided that electrodes are kept at ambient temperature

For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

Thermal Characteristics

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	300[1)]	K/W
Junction temperature		T_j	125	°C
Ambient operating temperature range		T_{amb}	- 55 to + 125	°C
Storage temperature range		T_{stg}	- 55 to + 150	°C

[1)] Valid provided that electrodes are kept at ambient temperature

Electrical Characteristics

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Min	Typ.	Max	Unit
Reverse breakdown voltage	I_R = 100 µA (pulsed)	$V_{(BR)}$	100			V
Leakage current[2)]	V_R = 1.5 V	I_R			0.5	µA
	V_R = 1.5 V, T_j = 60 °C	I_R			5	µA
	V_R = 10 V	I_R			0.8	µA
	V_R = 10 V, T_j = 60 °C	I_R			7.5	µA
	V_R = 50 V	I_R			2	µA
	V_R = 50 V, T_j = 60 °C	I_R			15	µA
	V_R = 75 V	I_R			5	µA
	V_R = 75 V, T_j = 60 °C	I_R			20	µA
Forward voltage[2)]	I_F = 0.1 mA	V_F			250	mV
	I_F = 10 mA	V_F			450	mV
	I_F = 250 mA	V_F			1000	mV
Diode capacitance	V_R = 0 V, f = 1 MHz	C_D		10		pF
	V_R = 1 V, f = 1 MHz	C_D		6		pF

[2)] Pulse test t_p < 300 µs, δ < 2 %

Typical Characteristics

T_{amb} = 25 °C, unless otherwise specified

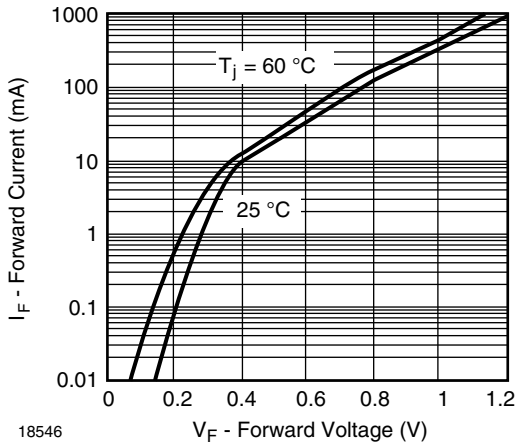

Figure 1. Typical Instantaneous Forward Characteristics

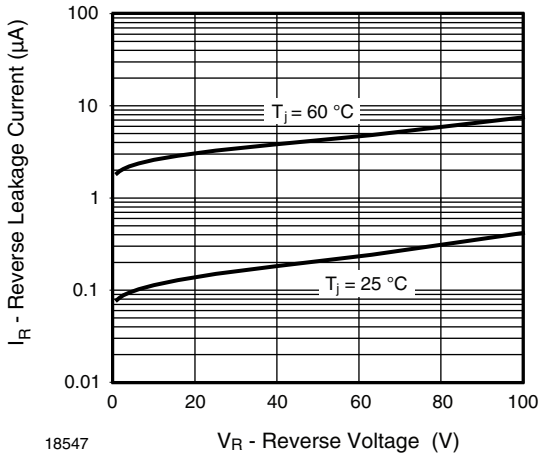

Figure 2. Typical Reverse Characteristics

For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

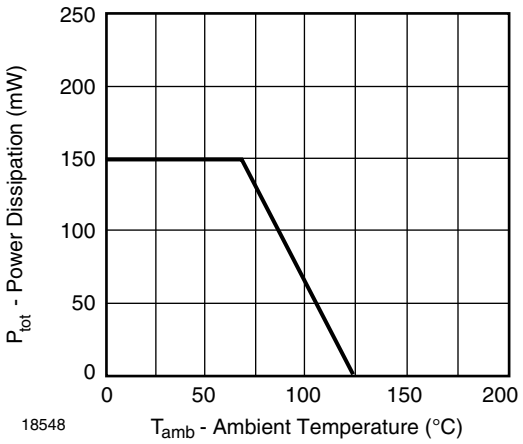

Figure 3. Admissible Power Dissipation vs. Ambient Temperature

Package Dimensions in millimeters (inches): **SOD-123**

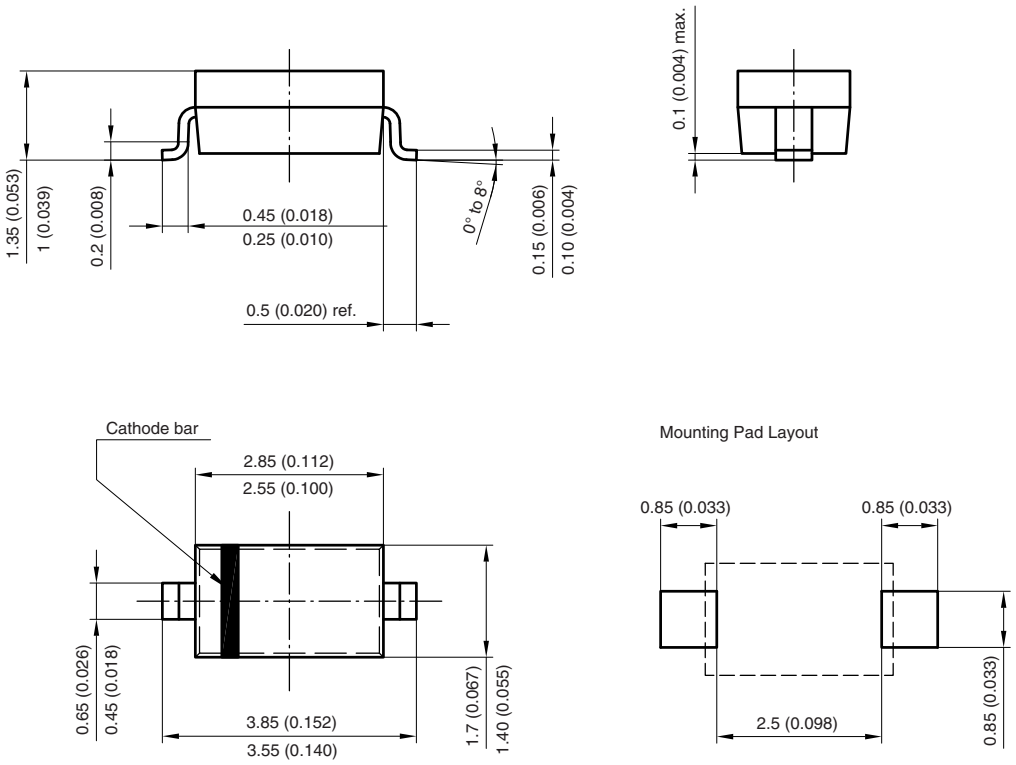

Rev. 4 - Date: 24. Sep. 2009
Document no.: S8-V-3910.01-001 (4)
17432

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.