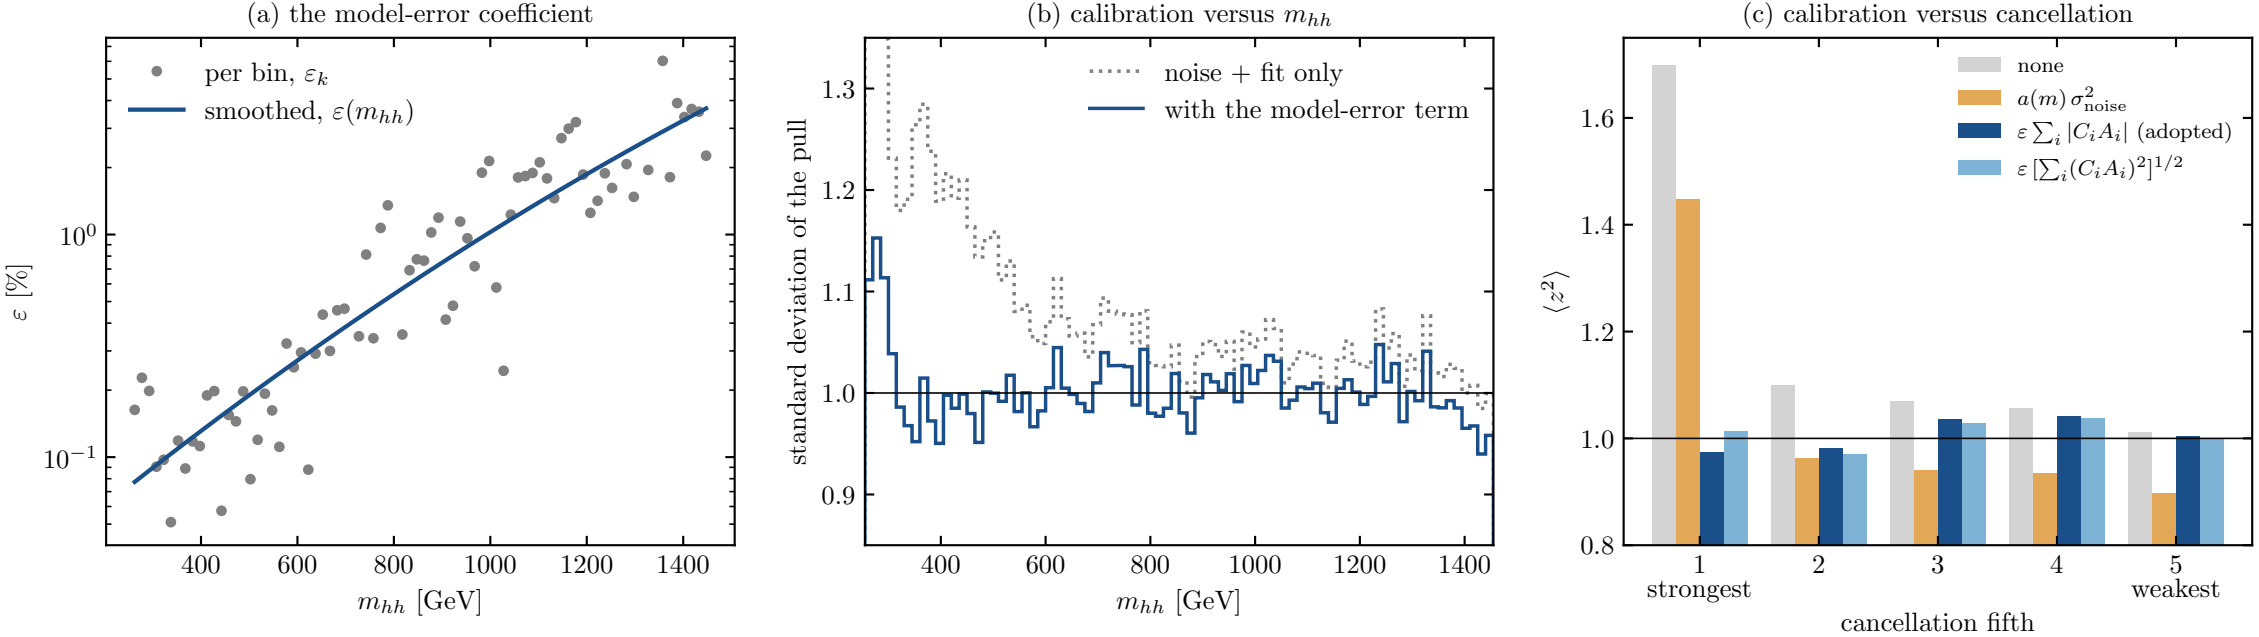

(a) the model-error coefficient
per bin, ε_k
smoothed, $\varepsilon(m_{hh})$
ε [%]
10^0
10^{-1}
400
600
800
1000
1200
1400
m_{hh} [GeV]
(b) calibration versus m_{hh}
noise + fit only
with the model-error term
standard deviation of the pull
1.3
1.2
1.1
1.0
0.9
400
600
800
1000
1200
1400
m_{hh} [GeV]
(c) calibration versus cancellation
none
$a(m)\,\sigma^2_{\text{noise}}$
$\varepsilon \sum_i |C_i A_i|$ (adopted)
$\varepsilon\,[\sum_i (C_i A_i)^2]^{1/2}$
$\langle z^2 \rangle$
1.6
1.4
1.2
1.0
0.8
1
strongest
2
3
4
5
weakest
cancellation fifth