


STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

3P-1


KUNMING/Changshui
RNAV RWY03/04L/04R(DADOL)

VAR1.8°W AD ELEV 2103.5

Kunming Approach						
D-ATIS 126.275	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225
Kunming Tower		TL 6000	Notes: 1. Under radar control service, actual ALT by ATC. 2. Departure turning is forbidden before DER. 3. While RWY simultaneous operation implemented, DADOL-9Y,9Z by ATC.			
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)	TA 5400				
		5700(QNH≥1031hPa) 5100(QNH≤979hPa)				
DADOL-9W DADOL-9Y DADOL-9Z	N		DADOL			



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

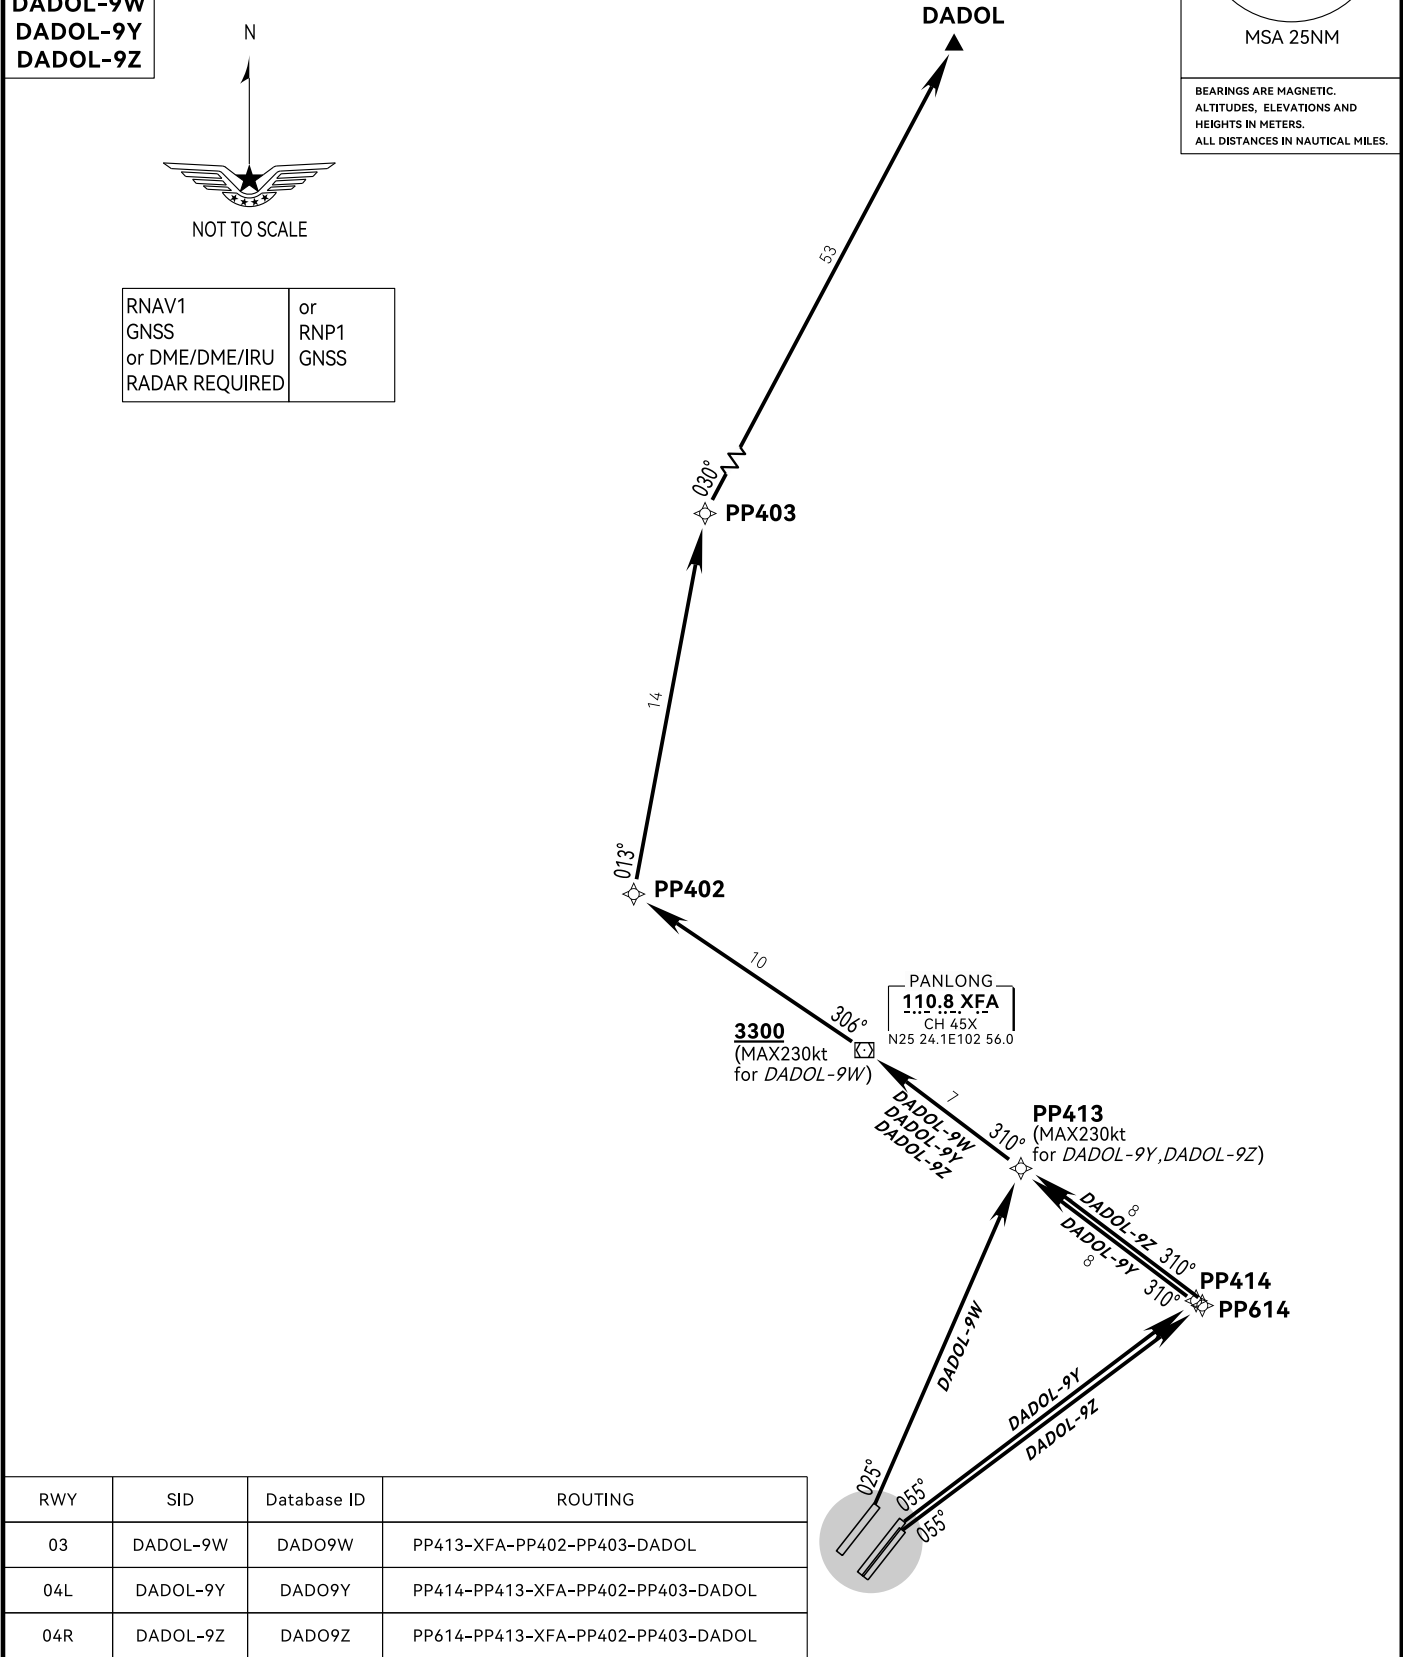

RWY	SID	Database ID	ROUTING
03	DADOL-9W	DADO9W	PP413-XFA-PP402-PP403-DADOL
04L	DADOL-9Y	DADO9Y	PP414-PP413-XFA-PP402-PP403-DADOL
04R	DADOL-9Z	DADO9Z	PP614-PP413-XFA-PP402-PP403-DADOL

Changes: Procedure, chart number.