

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

3P-4

KUNMING/Changshui
RNAV RWY03/04L/04R(LXI)

VAR1.8°W AD ELEV 2103.5

Kunming Approach						
D-ATIS 126.275	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225
Kunming Tower		TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1. Under radar control service, actual ALT by ATC. 2. While RWY simultaneous operation implemented, <i>LXI-9W</i> by ATC. 3. Departure turning is forbidden before DER.			
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					
LXI-9W LXI-9Y LXI-9Z						
		N				

140°3600230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

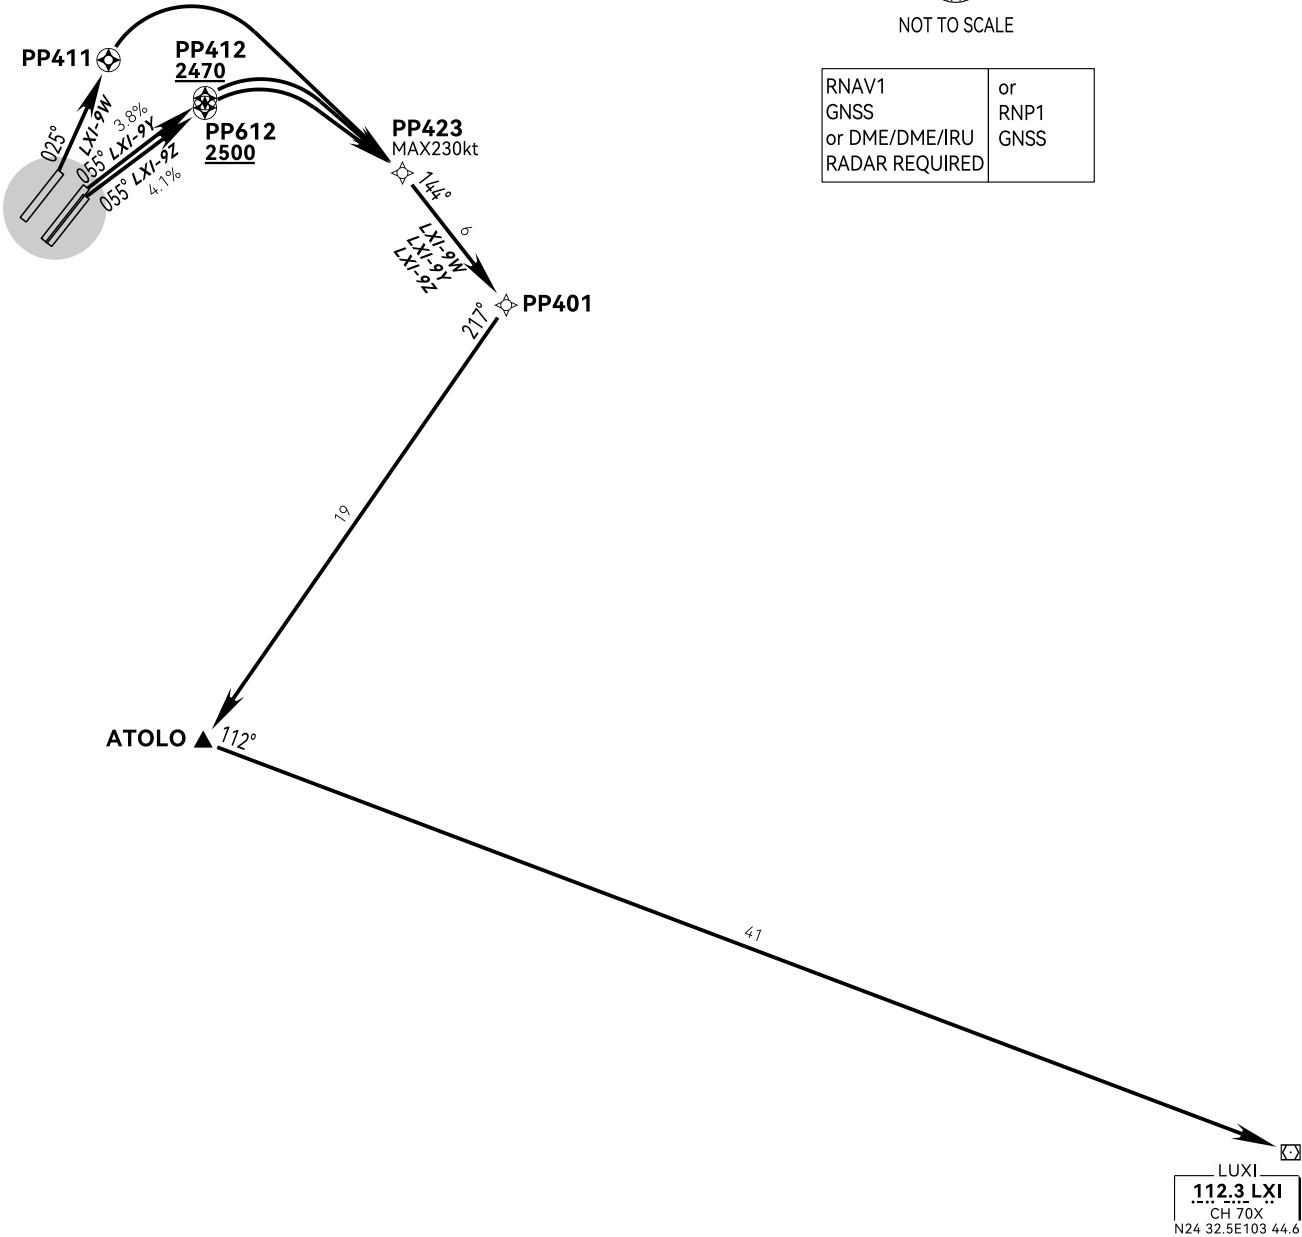

RWY	SID	Database ID	ROUTING
03	LXI-9W	LXI9W	PP411-PP423-PP401-ATOLO-LXI
04L	LXI-9Y	LXI9Y	PP412-PP423-PP401-ATOLO-LXI
04R	LXI-9Z	LXI9Z	PP612-PP423-PP401-ATOLO-LXI

Changes: Procedure, chart number.