

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

VAR1.8°W

3P-6

AD ELEV 2103.5

KUNMING/Changshui
RNAV RWY03/04L/04R(GULOT)

D-ATIS 126.275	Kunming Approach					
	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225
Kunming Tower		TL TA	6000 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1. Under radar control service, actual ALT by ATC. 2. Departure turning is forbidden before DER. 3. While RWY simultaneous operation implemented, <i>GULOT-9Y,9Z</i> by ATC.		
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					
GULOT-9W GULOT-9Y GULOT-9Z						

140°

3600

230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	-----------------

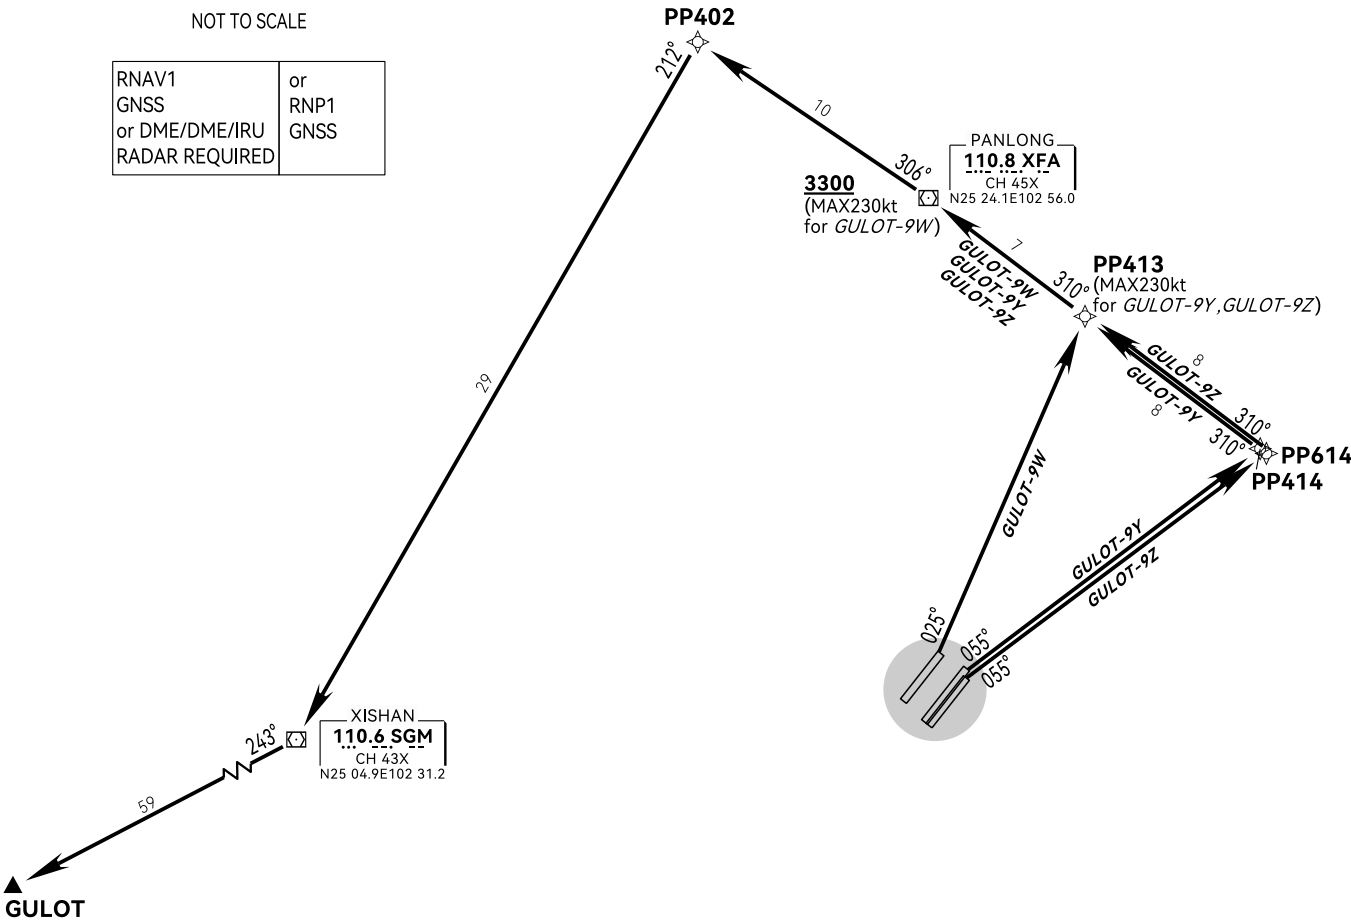

RWY	SID	Database ID	ROUTING
03	GULOT-9W	GULO9W	PP413-XFA-PP402-SGM-GULOT
04L	GULOT-9Y	GULO9Y	PP414-PP413-XFA-PP402-SGM-GULOT
04R	GULOT-9Z	GULO9Z	PP614-PP413-XFA-PP402-SGM-GULOT

Changes: Procedure, chart number.