


STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

3P-7


KUNMING/Changshui
RNAV RWY21/22L/22R(DADOL)

VAR1.8°W AD ELEV 2103.5

Kunming Approach						
D-ATIS 126.275	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	APP07 119.225
Kunming Tower		TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1. Under radar control service, actual ALT by ATC. 2. Departure turning is forbidden before DER. 3. While RWY simultaneous operation implemented, <i>DADOL-1Y,1Z</i> by ATC.			
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					
DADOL-1W DADOL-1Y DADOL-1Z		DADOL  N				



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.

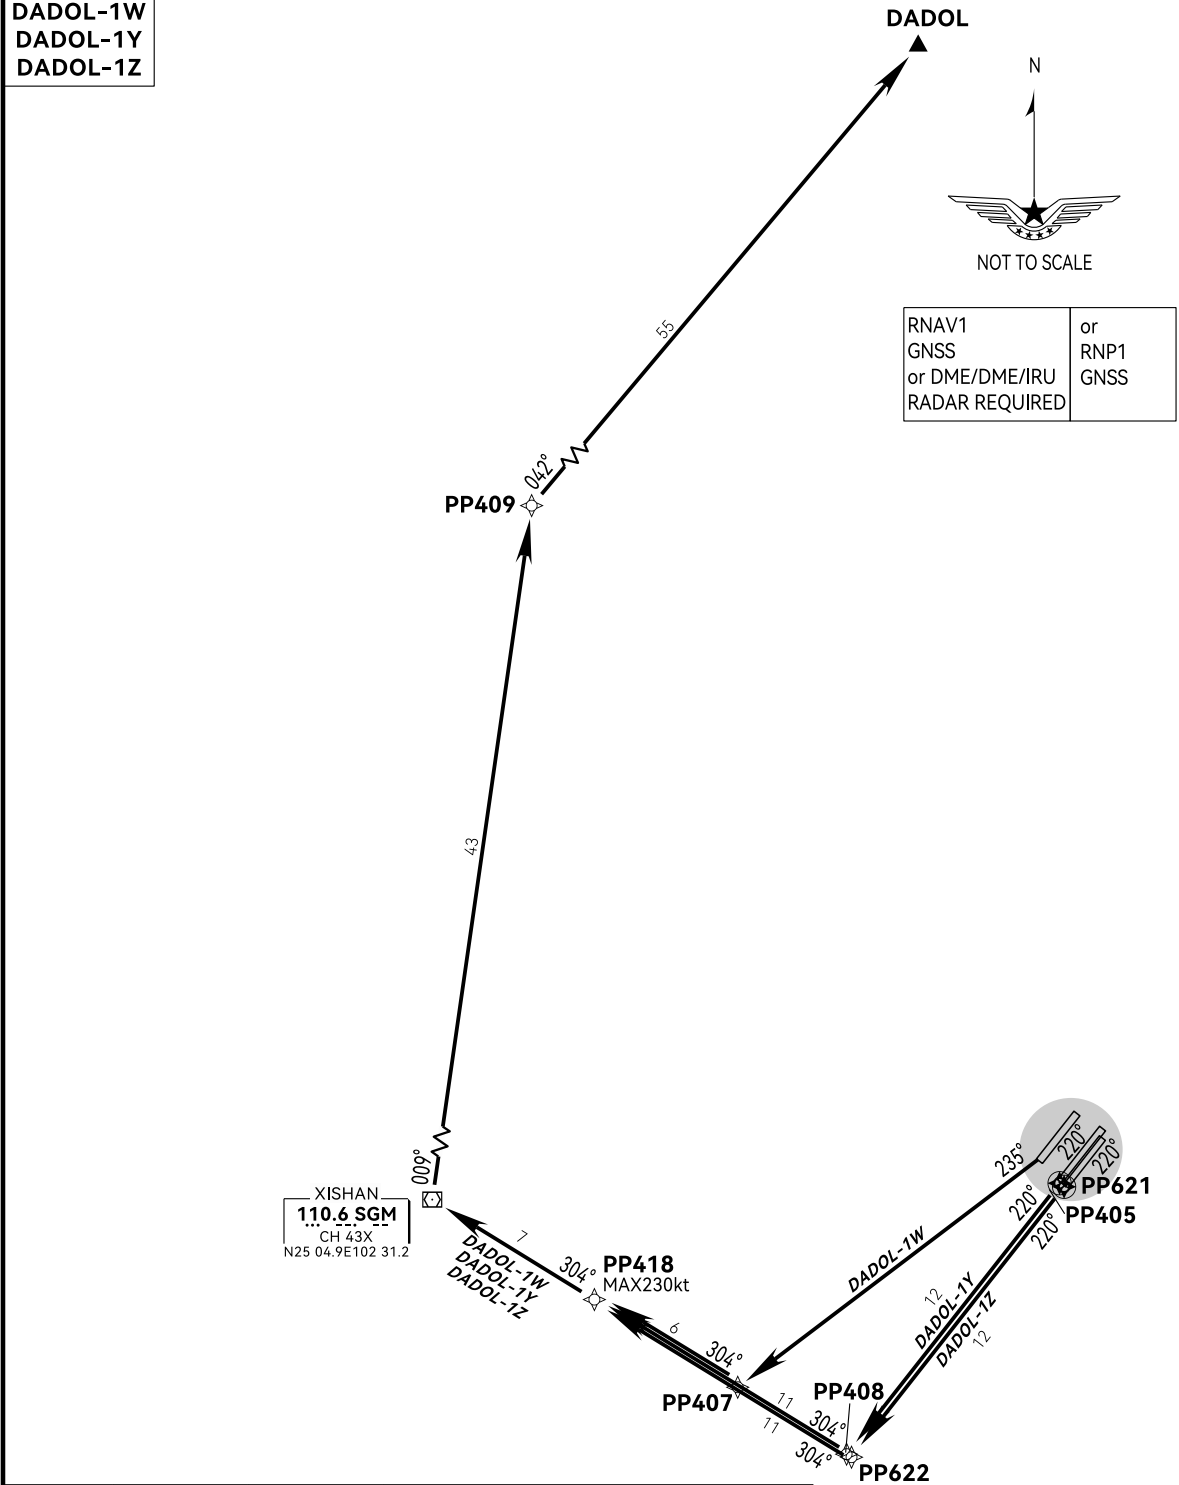

RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

RWY	SID	Database ID	ROUTING
21	DADOL-1W	DADO1W	PP407-PP418-SGM-PP409-DADOL
22R	DADOL-1Y	DADO1Y	PP405-PP408-PP418-SGM-PP409-DADOL
22L	DADOL-1Z	DADO1Z	PP621-PP622-PP418-SGM-PP409-DADOL

Changes: Procedure, chart number.