

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

3P-10

KUNMING/Changshui
RNAV RWY21/22L/22R(ELASU)

VAR1.8°W AD ELEV 2103.5

Kunming Approach						
D-ATIS 126.275	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	APP07 119.225
Kunming Tower		TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1. Under radar control service, actual ALT by ATC. 2. Departure turning is forbidden before DER. 3. While RWY simultaneous operation implemented, <i>ELASU-1Y, 1Z</i> by ATC.			
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					
ELASU-1W ELASU-1Y ELASU-1Z						

3600

140°230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

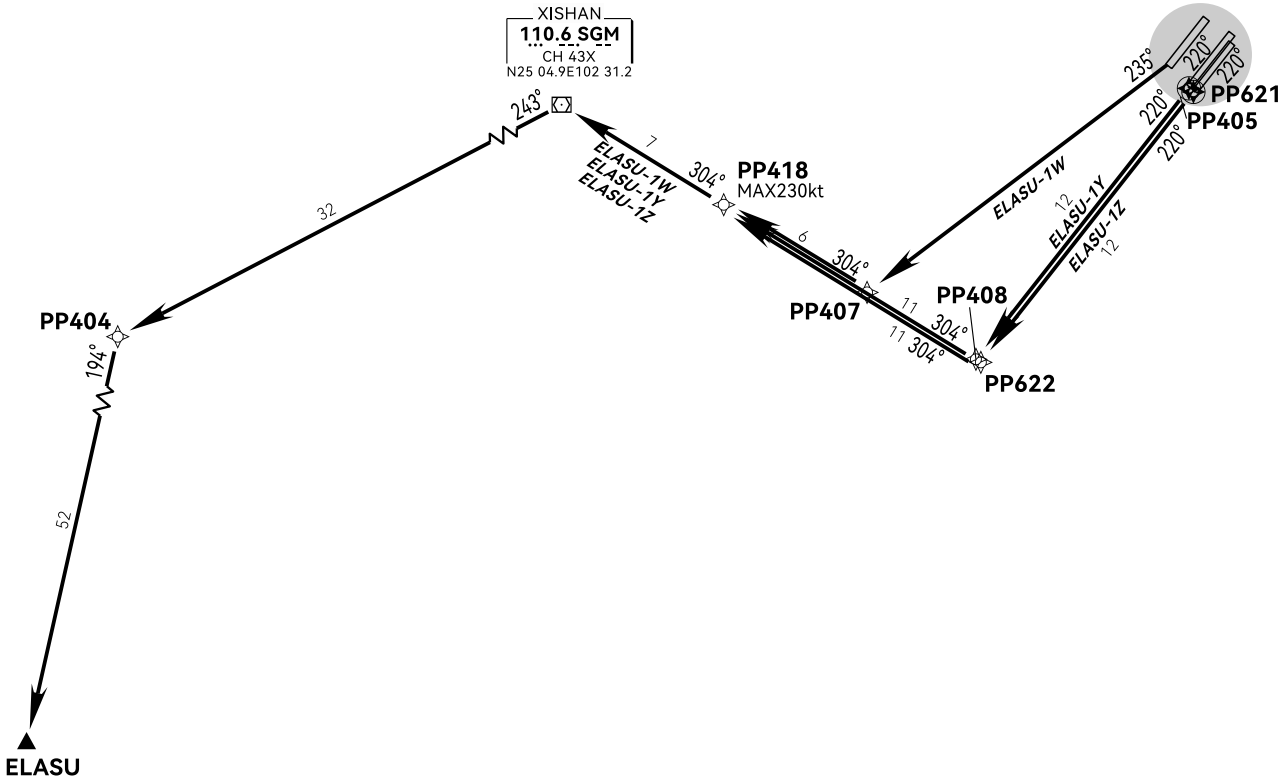

RWY	SID	Database ID	ROUTING
21	ELASU-1W	ELAS1W	PP407-PP418-SGM-PP404-ELASU
22R	ELASU-1Y	ELAS1Y	PP405-PP408-PP418-SGM-PP404-ELASU
22L	ELASU-1Z	ELAS1Z	PP621-PP622-PP418-SGM-PP404-ELASU

Changes: Procedure, chart number.