


STANDARD DEPARTURE  
CHART-INSTRUMENT  
ZPPP/KMG

3P-12

KUNMING/Changshui  
RNAV RWY21/22L/22R(NIXAS)

VAR1.8°W AD ELEV 2103.5


| Kunming Approach                   |                                    |                                   |                                                       |                                                                                                                                                                                       |                                   |                         |
|------------------------------------|------------------------------------|-----------------------------------|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------------------|
| D-ATIS<br><b>126.275</b>           | APP01<br><b>119.0</b><br>(125.55)  | APP02<br><b>123.8</b><br>(125.55) | APP03<br><b>124.25</b><br>(127.9)                     | APP04<br><b>121.15</b><br>(126.55)                                                                                                                                                    | APP05<br><b>120.35</b><br>(127.9) | APP07<br><b>119.225</b> |
| Kunming Tower                      |                                    | TL<br>TA                          | 6000<br>5400<br>5700(QNH≥1031hPa)<br>5100(QNH≤979hPa) | Notes:<br>1. Under radar control service, actual ALT by ATC.<br>2. Departure turning is forbidden before DER.<br>3.While RWY simultaneous operation implemented, N/X4S-1Y, 1Z by ATC. |                                   |                         |
| TWR(E)<br><b>118.1</b><br>(118.85) | TWR(W)<br><b>130.6</b><br>(118.85) |                                   |                                                       |                                                                                                                                                                                       |                                   |                         |
| NIXAS-1W<br>NIXAS-1Y<br>NIXAS-1Z   |                                    |                                   |                                                       |                                                                                                                                                                                       |                                   |                         |
|                                    |                                    |                                   |                                                       |                                                                                                                                                                                       | N                                 |                         |



BEARINGS ARE MAGNETIC.  
ALTITUDES, ELEVATIONS AND  
HEIGHTS IN METERS.  
ALL DISTANCES IN NAUTICAL MILES.



|                                                   |                    |
|---------------------------------------------------|--------------------|
| RNAV1<br>GNSS<br>or DME/DME/IRU<br>RADAR REQUIRED | or<br>RNP1<br>GNSS |
|---------------------------------------------------|--------------------|

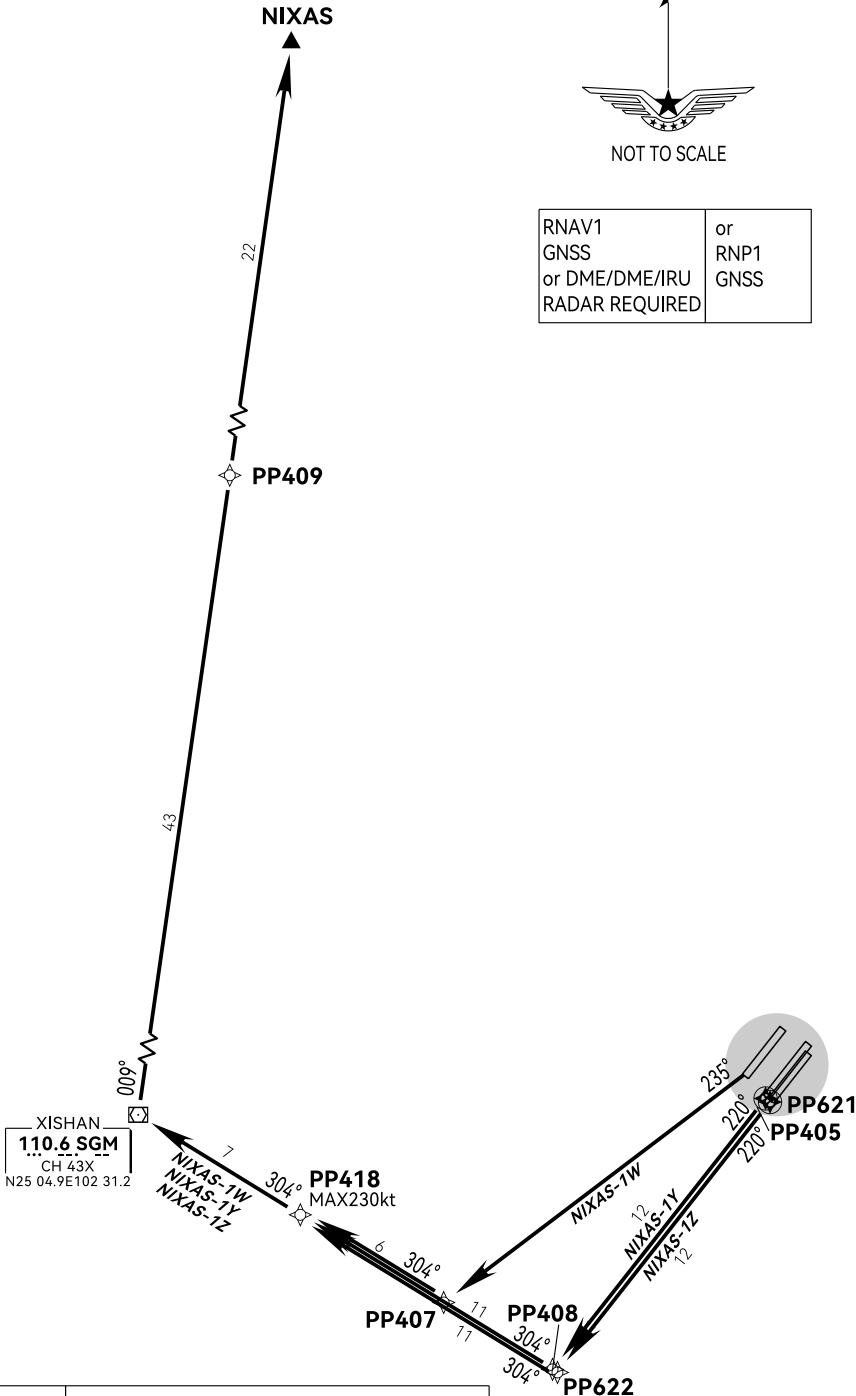

| RWY | SID      | Database ID | ROUTING                           |
|-----|----------|-------------|-----------------------------------|
| 21  | NIXAS-1W | NIXA1W      | PP407-PP418-SGM-PP409-NIXAS       |
| 22R | NIXAS-1Y | NIXA1Y      | PP405-PP408-PP418-SGM-PP409-NIXAS |
| 22L | NIXAS-1Z | NIXA1Z      | PP621-PP622-PP418-SGM-PP409-NIXAS |

Changes: Procedure, chart number.