

STANDARD DEPARTURE  
CHART-INSTRUMENT  
ZPPP/KMG

3P-15

KUNMING/Changshui  
RNAV RWY21/22L/22R(DADOL)

VAR1.8°W AD ELEV 2103.5

|                                    |                                    |                                   |                                                                   |                                                                                                                                                           |                                    |                                   |                         |
|------------------------------------|------------------------------------|-----------------------------------|-------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------------------|-------------------------|
| D-ATIS<br><b>126.275</b>           |                                    | Kunming Approach                  |                                                                   |                                                                                                                                                           |                                    |                                   | APP07<br><b>119.225</b> |
|                                    |                                    | APP01<br><b>119.0</b><br>(125.55) | APP02<br><b>123.8</b><br>(125.55)                                 | APP03<br><b>124.25</b><br>(127.9)                                                                                                                         | APP04<br><b>121.15</b><br>(126.55) | APP05<br><b>120.35</b><br>(127.9) |                         |
| Kunming Tower                      |                                    |                                   | TL<br>TA<br>6000<br>5400<br>5700(QNH≥1031hPa)<br>5100(QNH≤979hPa) | Notes:<br>1.Using this chart need ATC permission.<br>2.CCO terminated once ATC give heading instructions.<br>3.Departure turning is forbidden before DER. |                                    |                                   | DADOL-4Q                |
| TWR(E)<br><b>118.1</b><br>(118.85) | TWR(W)<br><b>130.6</b><br>(118.85) |                                   |                                                                   |                                                                                                                                                           |                                    |                                   |                         |
| Only used for CCO                  |                                    |                                   |                                                                   |                                                                                                                                                           |                                    |                                   |                         |

140°

3600

230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.  
ALTITUDES, ELEVATIONS AND  
HEIGHTS IN METERS.  
ALL DISTANCES IN NAUTICAL MILES.



|                                                   |                    |
|---------------------------------------------------|--------------------|
| RNAV1<br>GNSS<br>or DME/DME/IRU<br>RADAR REQUIRED | or<br>RNP1<br>GNSS |
|---------------------------------------------------|--------------------|

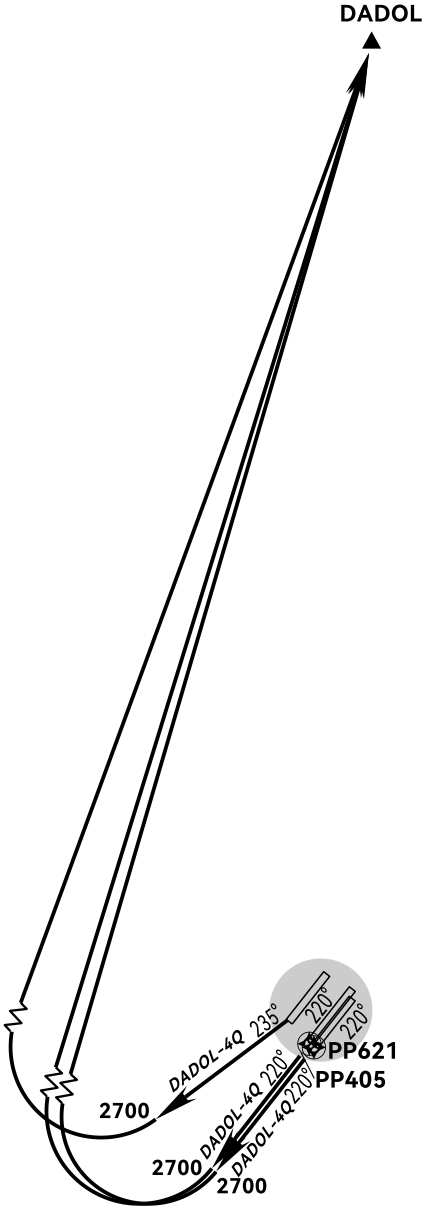

| RWY | SID      | Database ID | ROUTING          |
|-----|----------|-------------|------------------|
| 21  | DADOL-4Q | DADO4Q      | 2700-DADOL       |
| 22L |          |             | PP621-2700-DADOL |
| 22R |          |             | PP405-2700-DADOL |

Changes: Procedure, chart number.