

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

3P-16

KUNMING/Changshui
RNAV RWY21/22L/22R(NODIB)

VAR1.8°W AD ELEV 2103.5

D-ATIS 126.275		Kunming Approach					APP07 119.225
		APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	
Kunming Tower		TL TA	6000 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1.Using this chart need ATC permission. 2.CCO terminated once ATC give heading instructions. 3.Departure turning is forbidden before DER.		NODIB-4Q	
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)						
Only used for CCO							

140°

3600

230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

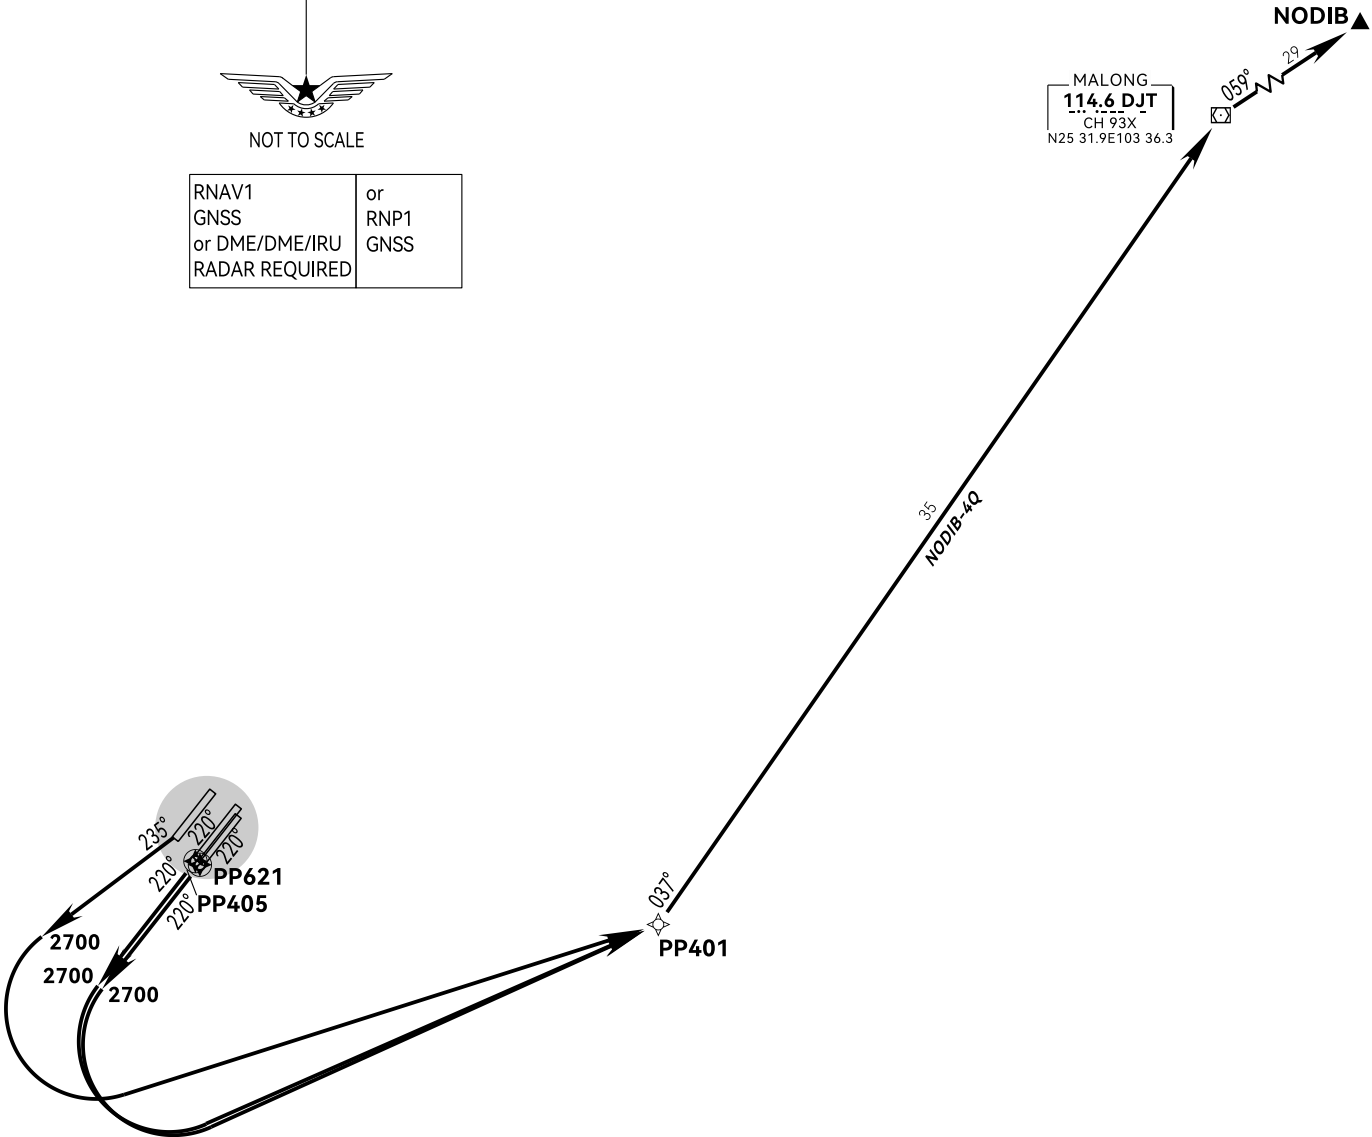

RWY	SID	Database ID	ROUTING	
21	NODIB-4Q	NODI4Q	2700-PP401	-DJT-NODIB
22L			PP621-2700-PP401	
22R			PP405-2700-PP401	

Changes: Procedure, chart number.