

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG



VAR1.8°W

3V-1

AD ELEV 2103.5

KUNMING/Changshui
RWY03/04L/04R(DADOL)

D-ATIS 126.275	Kunming Approach					
	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225
Kunming Tower				TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)		
TWR(E) 118.1 (118.85)		TWR(W) 130.6 (118.85)				
Notes: 1.Under radar control service, actual ALT by ATC. 2.While RWY simultaneous operation implemented, <i>DADOL-6D</i> (RWY04L/04R) by ATC. 3.Departure turning is forbidden before DER.			DADOL-6D(DADO6D)		 DADOL N26 30.1	

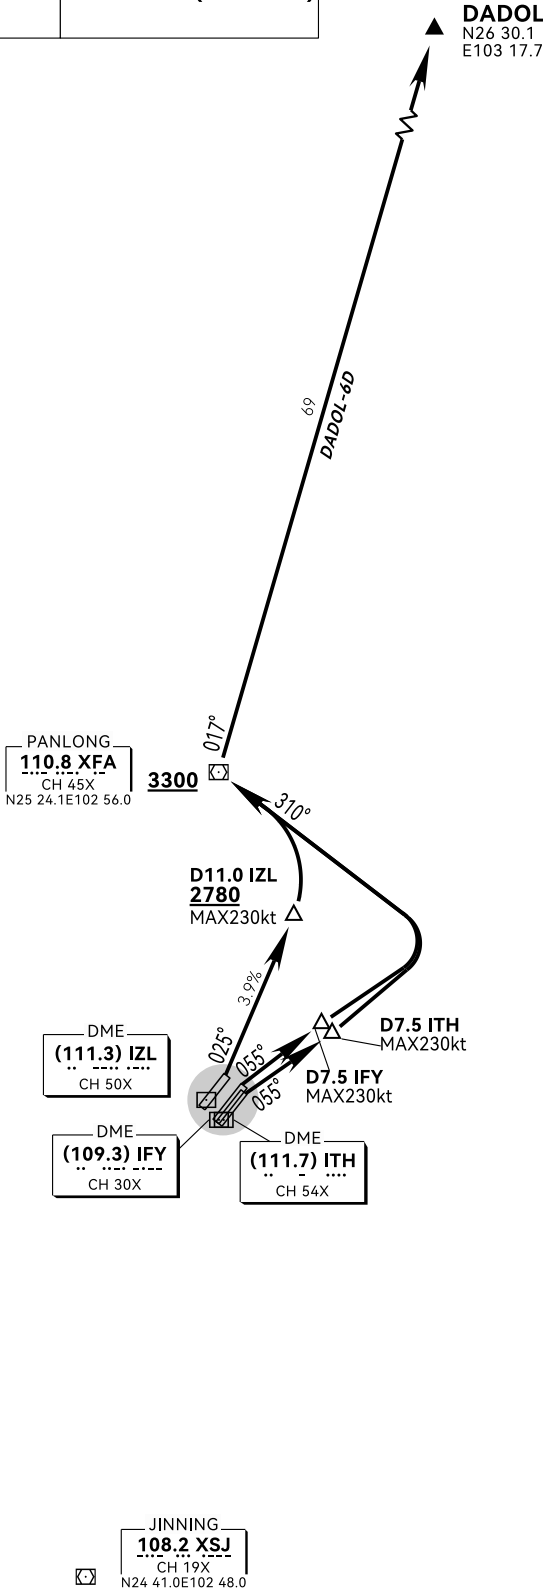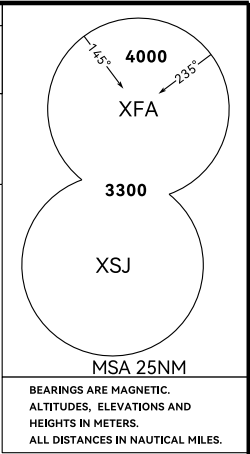

Changes: Procedure,Chart number.