

STANDARD DEPARTURE
CHART-INSTRUMENT
ZPPP/KMG

VAR1.8°W


3V-8

AD ELEV 2103.5

KUNMING/Changshui
RWY21/22L/22R(LXI)

D-ATIS 126.275	Kunming Approach					
	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	APP07 119.225
Kunming Tower				TL 6000 TA 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)		
TWR(E) 118.1 (118.85)		TWR(W) 130.6 (118.85)				
Notes: 1.Under radar control service, actual ALT by ATC. 2.While RWY simultaneous operation implemented, <i>LXI-3D</i> (RWY21) by ATC. 3.Departure turning is forbidden before DER.			LXI-3D(LXI3D)			

Diagram illustrating the Kunming Tower and surrounding terrain. The tower is a circle with a radius of 4000 meters. The terrain is shown as a series of concentric circles with radii of 3300 and 4000 meters. The tower is labeled XFA and the terrain is labeled XSJ. The distance from the tower to the terrain is 4000 meters. The angle between the tower and the terrain is 145 degrees. The angle between the tower and the terrain is 235 degrees.

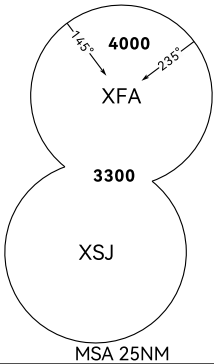

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



PANLONG
110.8 XFA
CH 45X
N25 24.1E102 56.0

XISHAN
110.6 SGM
CH 43X
N25 04.9E102 31.2

DME
(110.1) IBH
CH 38X

DME
(108.5) IKM
CH 22X

DME
(109.95) IPB
CH 36Y

D9.7 IBH
MAX230kt

D10.0 IPB
MAX230kt

D10.0 IKM
MAX230kt

ATOLO
N24 47.4
E103 02.0

JINNING
108.2 XSJ
CH 19X
N24 41.0E102 48.0

LUXI
112.3 LXI
CH 70X
N24 32.5E103 44.6

Changes: Procedure,Chart number.