

STANDARD ARRIVAL
CHART-INSTRUMENT
ZPPP/KMG

4P-2

KUNMING/Changshui
RNAV RWY03/04L/04R(LXI)

VAR1.8°W AD ELEV 2103.5

D-ATIS 128.45	Kunming Approach					
	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225
Kunming Tower		TL TA	6000 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Note:Under radar control service, actual ALT by ATC.		LXI-9E LXI-8F
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					

140°

3600

230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

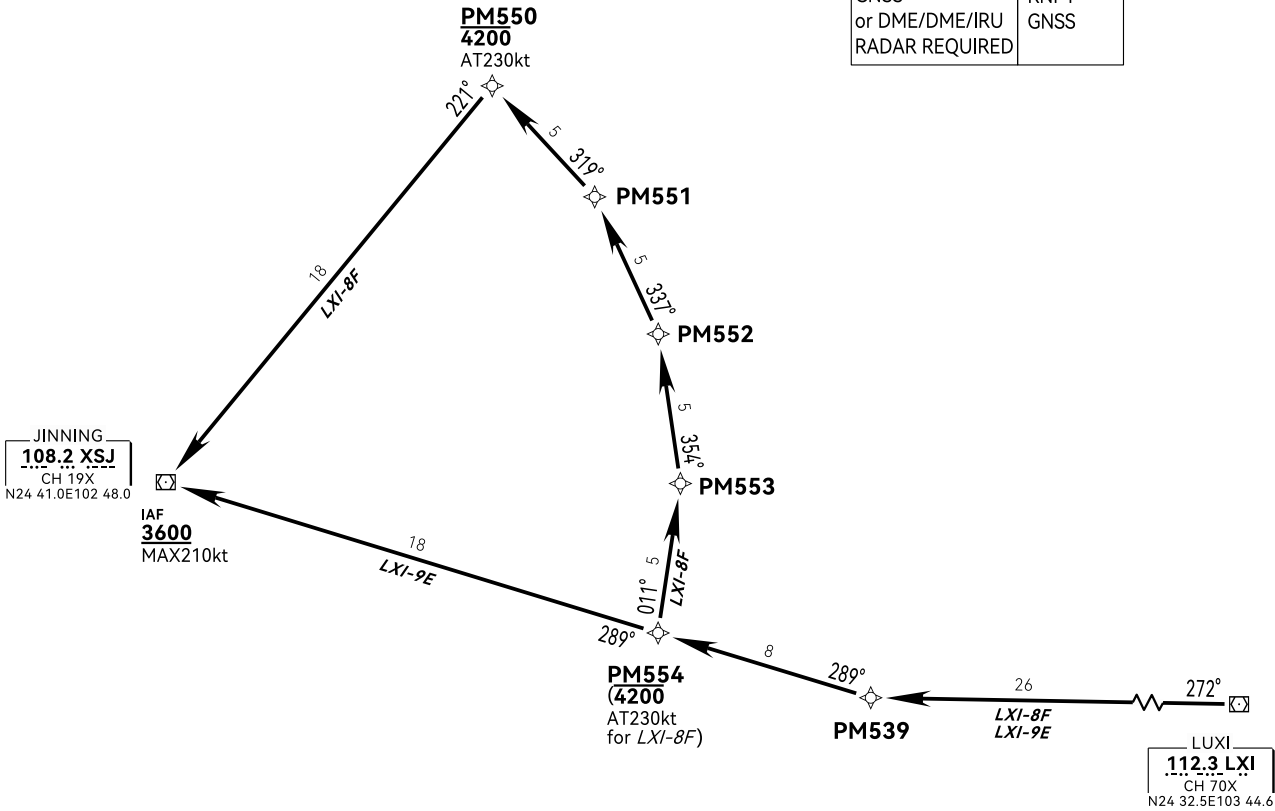

RWY	STAR	Database ID	ROUTING
03,04L,04R	LXI-9E	LXI9E	LXI-PM539-PM554-XSJ
	LXI-8F	LXI8F	LXI-PM539-PM554-PM553-PM552-PM551-PM550-XSJ

Changes: Procedure, Chart number.