

STANDARD ARRIVAL
CHART-INSTRUMENT
ZPPP/KMG

4P-7

KUNMING/Changshui
RNAV RWY21/22L/22R(LXI)

VAR1.8°W AD ELEV 2103.5

D-ATIS 128.45	Kunming Approach						
	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	APP07 119.225	
Kunming Tower		TL TA	6000 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Note:Under radar control service, actual ALT by ATC.			LXI-1A LXI-2B ^{ATC}
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)						

140°

3600

230°

ARP


3300

MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

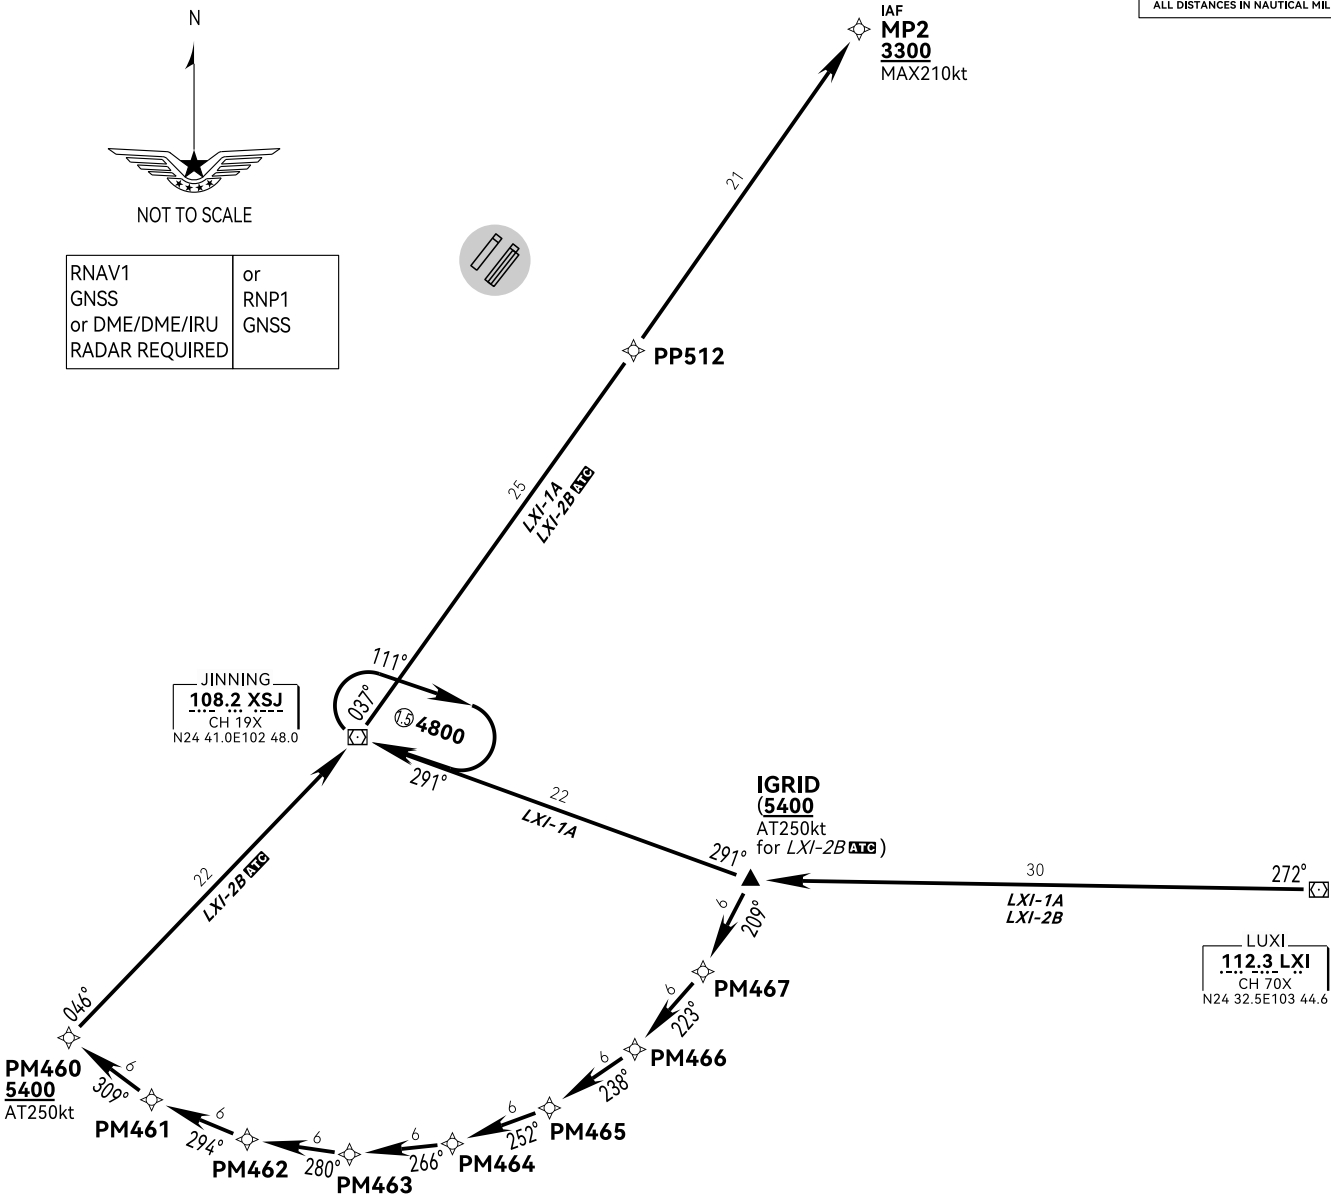

RWY	STAR	Database ID	ROUTING
21,22L,22R	LXI-1A	LXI1A	LXI-IGRID-XSJ-PP512-MP2
	LXI-2B	LXI2B	LXI-IGRID-PM467-PM466-PM465-PM464-PM463-PM462-PM461-PM460-XSJ-PP512-MP2

Changes: Procedure, Chart number.