

STANDARD ARRIVAL
CHART-INSTRUMENT
ZPPP/KMG

4P-12

KUNMING/Changshui
RNAV RWY21/22L/22R

VAR1.8°W AD ELEV 2103.5

Kunming Approach						
D-ATIS 128.45	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 124.25 (127.9)	APP04 121.15 (126.55)	APP05 120.35 (127.9)	APP07 119.225
Kunming Tower		TL TA	6000 5400 5700(QNH≥1031hPa) 5100(QNH≤979hPa)	Notes: 1. Using this chart need ATC permission. 2. CDO terminated once ATC give heading instructions.		LXI-1A MEBNA-4M GULOT-4M
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)					
Only used for CDO						

140°

3600

230°

ARP

3300


MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.



NOT TO SCALE

RNAV1 GNSS or DME/DME/IRU RADAR REQUIRED	or RNP1 GNSS
---	--------------------

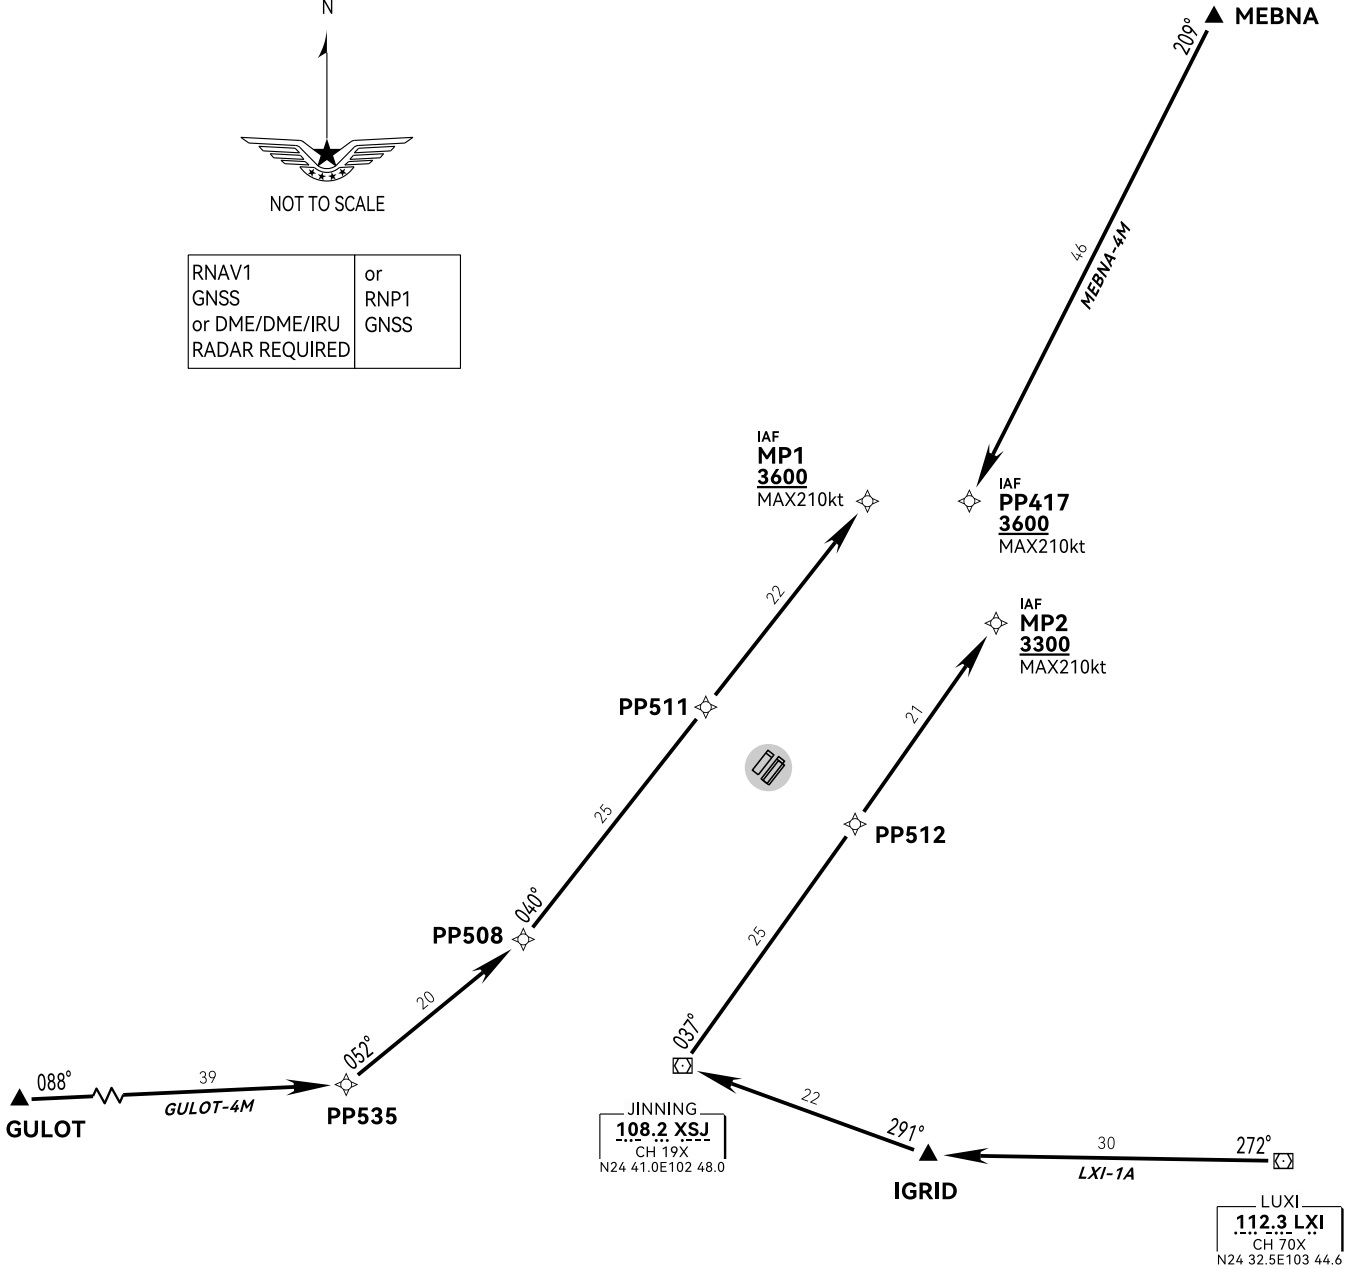

RWY	STAR	Database ID	ROUTING
21,22L,22R	LXI-1A	LXI1A	LXI-IGRID-XSJ-PP512-MP2
	MEBNA-4M	MEBN4M	MEBNA-PP417
	GULOT-4M	GULO4M	GULOT-PP535-PP508-PP511-MP1

Changes: Procedure, Chart number.