INSTRUMENT APPROACH CHART-ICAO

ZPPP/KMG VAR1.8°W

5L-1

AD ELEV 2103.5
DTHR ELEV 2102.6

KUNMING/Changshui

RNAV CAT-I/II ILS/DME z RWY03

D-ATIS	Kunming Approach					
128.45	APP01 119.0 (125.55)	APP02 123.8 (125.55)	APP03 120.35 (127.9)	APP04 121.15 (126.55)	APP05 124.25 (127.9)	APP07 119.225

Kunming Tower		LOC	Final Apch Crs	FAF
TWR(E) 118.1 (118.85)	TWR(W) 130.6 (118.85)	IZL 111.3	040°	D9.3 IZL 3000(897)

MISSED APPROACH
Climb straight ahead to D2.6 IZL at 2225 or above, turn LEFT and track 025°MAG to PP527, turn LEFT and direct to PP511, then track 220°MAG to MP3 at 3300 or above, contact ATC.

TL 6000
TA 5400
5700(QNH≥1031hPa)
5100(QNH≤979hPa)

Notes:
1. Approach speed limit:
Keep IAS180kt at IF, keep IAS more than 170kt until 8NM from touchdown, otherwise inform ATC.
2. Circling W of RWY only.

3600
ARP
3300
MSA 25NM

BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.

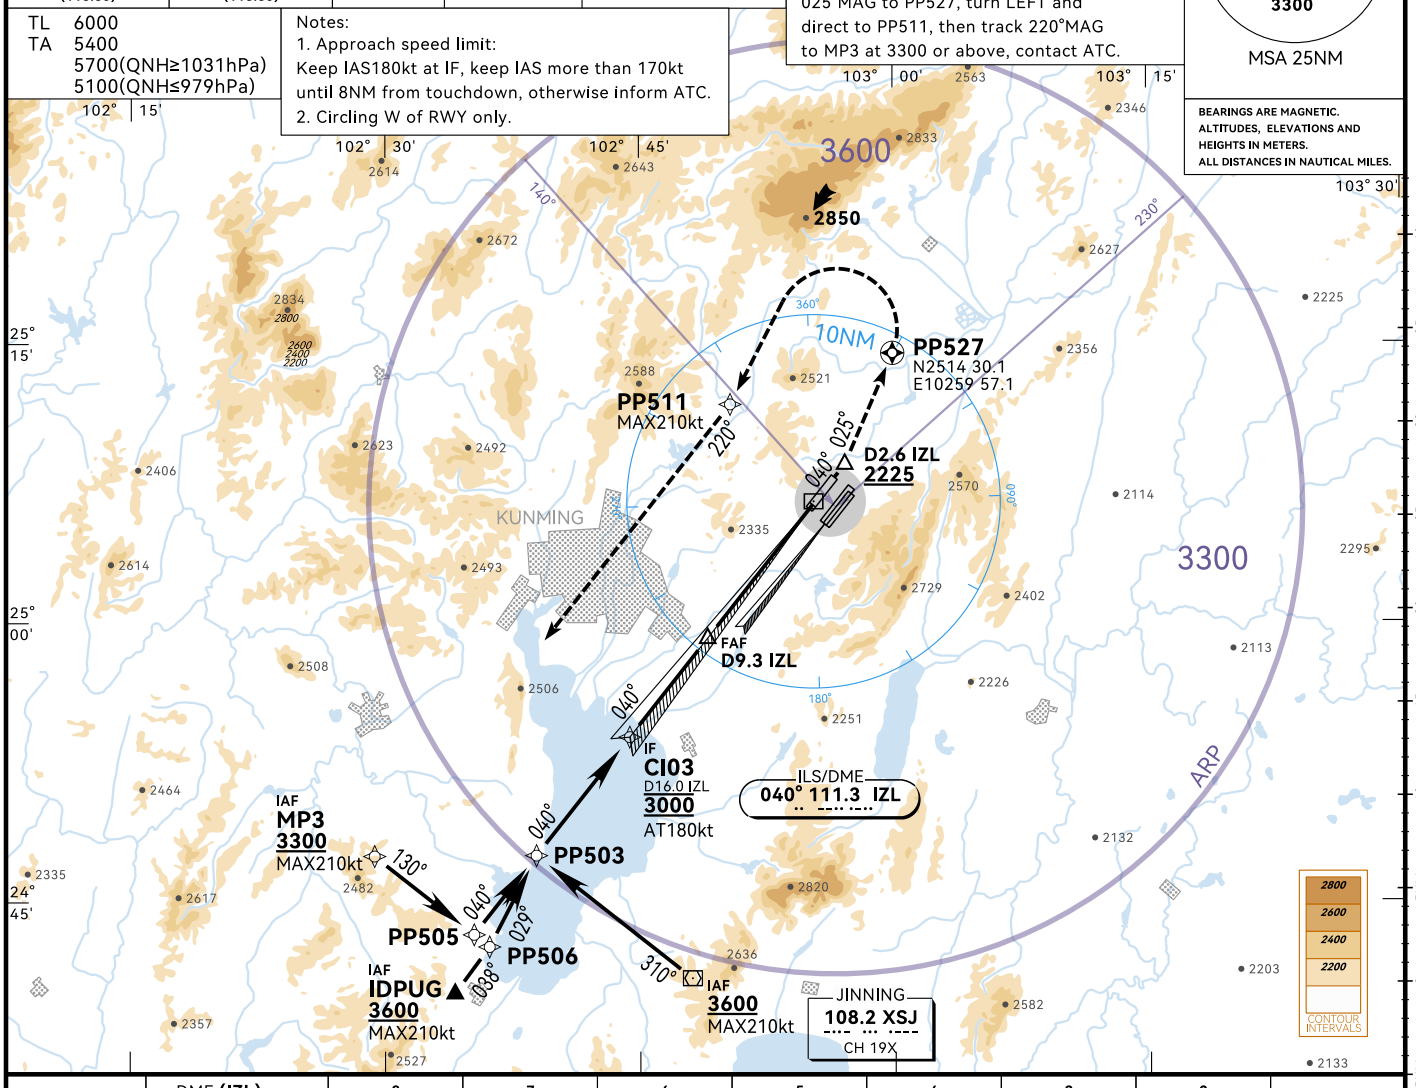

GP INOP	DME (IZL)	8	7	6	5	4	3	2	
	ALT	2879	2781	2684	2587	2490	2393	2296	

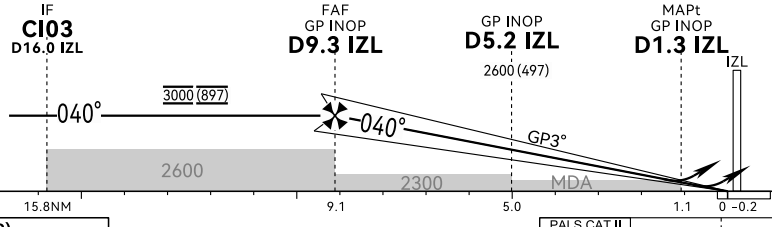

FAF-MAPt 8.0NM (GP INOP)						
GS kt	80	100	120	140	160	180
min:sec	**6:00**	**4:48**	**4:00**	**3:26**	**3:00**	**2:40**
GP 3°m/s	2.1	2.7	3.3	3.8	4.3	4.9

PALS CAT II
PAPI
D2.6 IZL
2225
LT
025°
PP527

	ILS/DME DA(H)	OCA(H)	RVR	VIS	GP INOP MDA(H)	OCA(H)	RVR	VIS	CIRCLING MDA(H)	OCA(H)	VIS	ILS CAT II (DH)	(RA)	RVR Autopilot to DH and below	RVR Manual operation below DH	ILS HUD Special CAT I (DH)	(RA)	RVR
A									2350(247)		2800							
B	2163(60)	2163(60)	550	800	2230(127)	2230(127)	1600	1600	2470(367)		3000	(30)	(31)	300	300	(45)	(48)	450
C									2500(397)		4400							
D									2500(397)		5000	(30)	(31)	300	350			

Changes: Procedure, Chart number.