


INSTRUMENT
APPROACH
CHART-ICAO
ZPPP/KMG

VAR1.8°W

5L-3

AD ELEV 2103.5
THR ELEV 2098.7

KUNMING/Changshui
RNAV ILS/DME z RWY04L

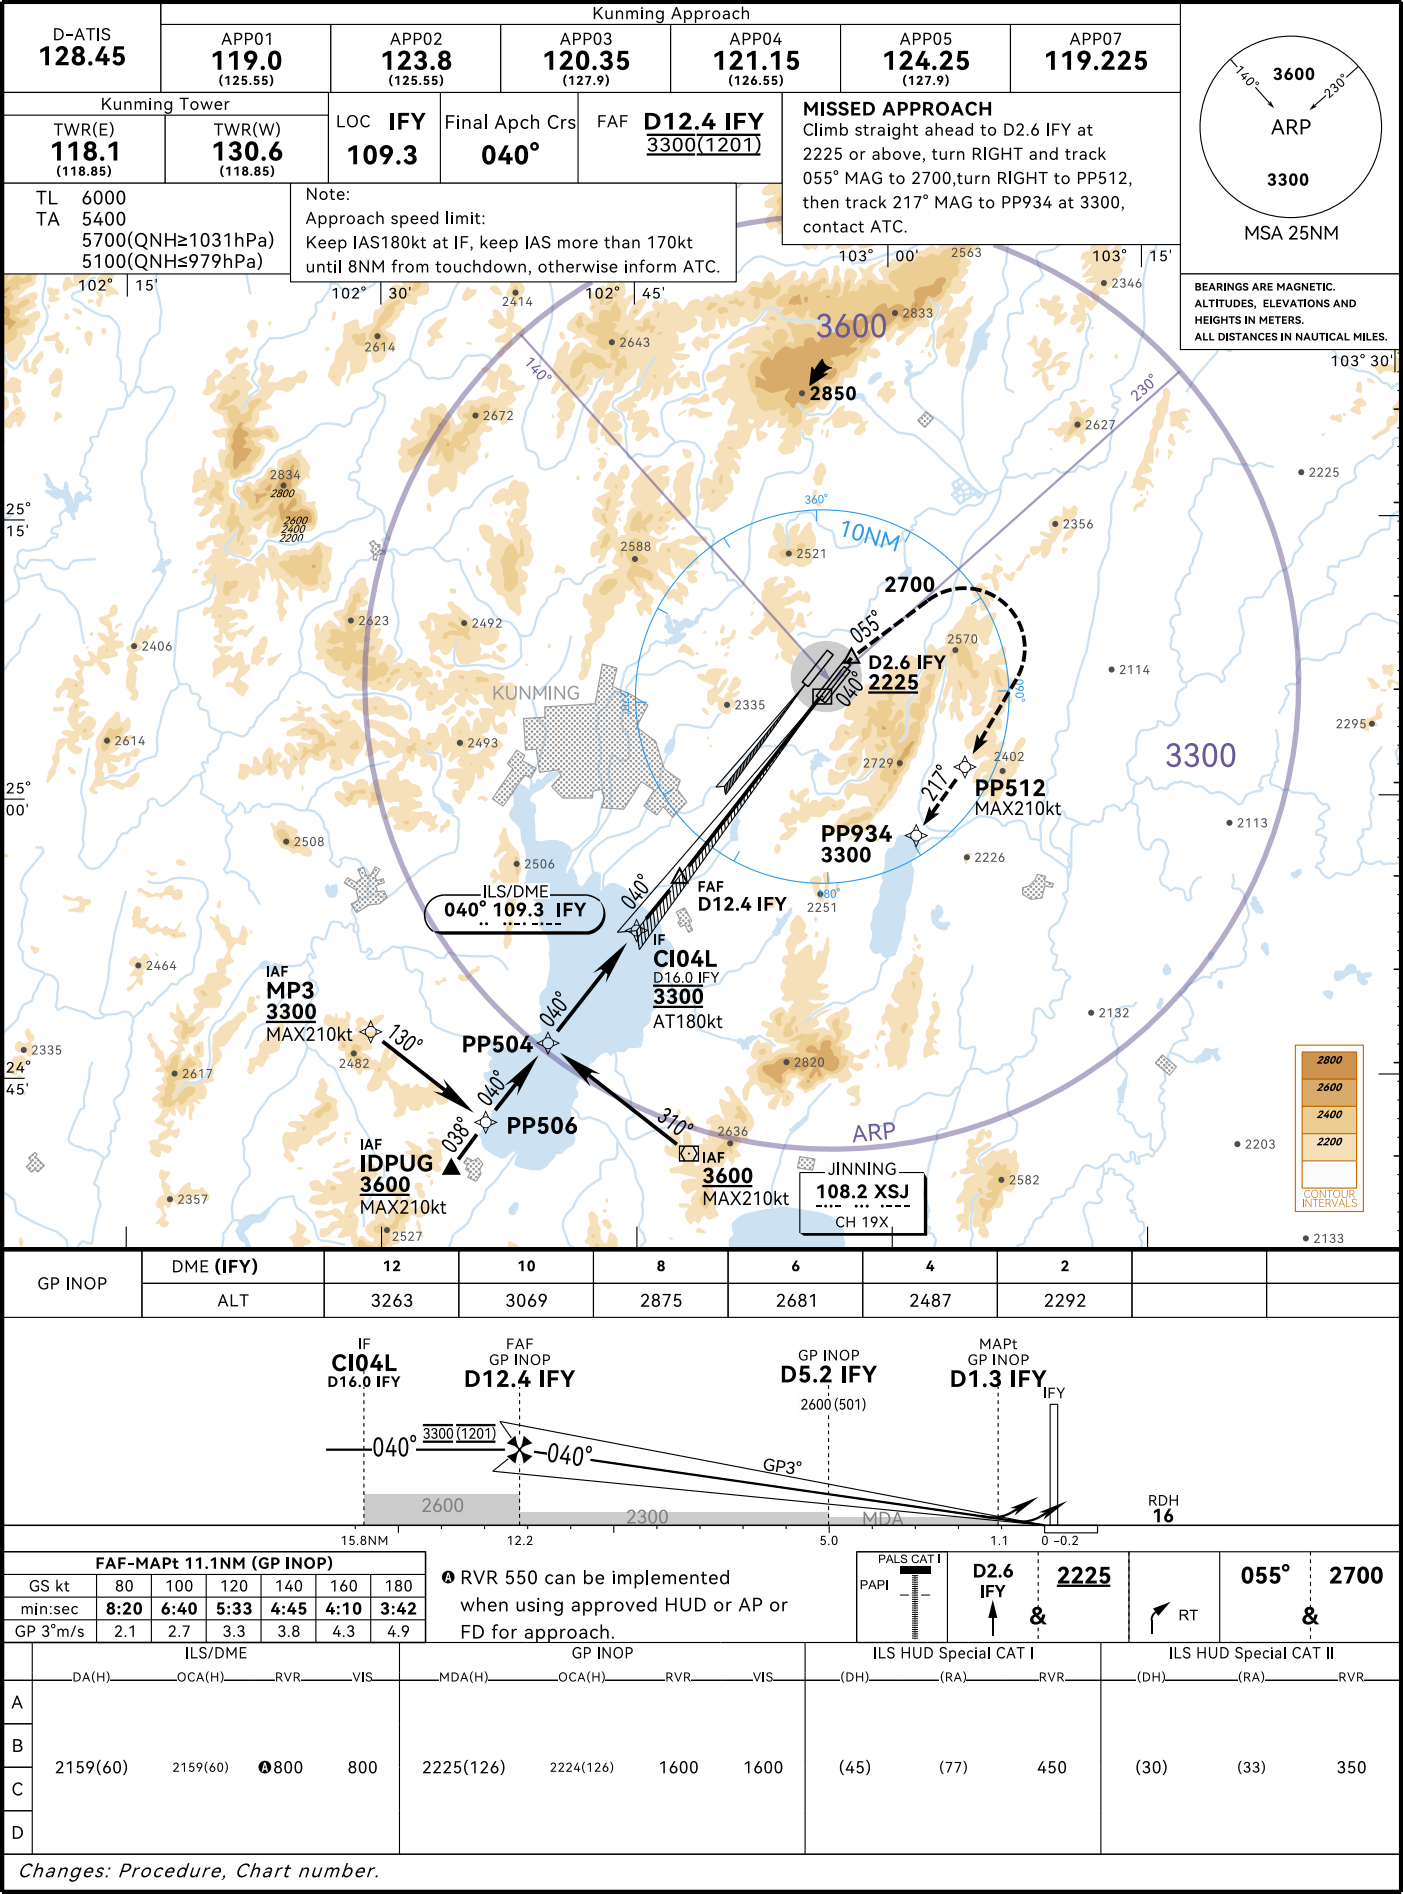

IF
C104L
D16.0 IFY

FAF
GP INOP
D12.4 IFY

GP INOP
D5.2 IFY

MAPt
GP INOP
D1.3 IFY

040°

040°

040°

040°

2600

2300

MDA

RDH
16

FAF-MAPt 11.1NM (GP INOP)

GS kt

80

100

120

140

160

180

min:sec

8:20

6:40

5:33

4:45

4:10

3:42

GP 3°m/s

2.1

2.7

3.3

3.8

4.3

4.9

● RVR 550 can be implemented
when using approved HUD or AP or
FD for approach.

PALS CAT I

PAPI

D2.6 IFY

2225

055°

2700

ILS HUD Special CAT I

(DH)

(RA)

RVR

(DH)

(RA)

RVR

ILS HUD Special CAT II

(DH)

(RA)

RVR

(DH)

(RA)

RVR

A

B

C

D

2159(60)

2159(60)

800

800

2225(126)

2224(126)

1600

1600

(45)

(77)

450

(30)

(33)

350

Changes: Procedure, Chart number.