

INSTRUMENT
APPROACH
CHART-ICAO
ZSZS/HSN

5L-2

AD ELEV 1.8
DTHR ELEV 1.8

ZHOUSHAN/Putuoshan

ILS/DME y RWY18

Zhoushan Tower

LOC **IPT**
108.75

Final Apch Crs
181°

FAF **D7.2 IPT**
700(698)


MISSED APPROACH

Climb straight ahead to 600, turn LEFT to 'HSN' at 1200 or above, and approach again, or join holding pattern by ATC.


TL	3600
TA	3000
	3300(QNH≥1031hPa)
	2700(QNH≤979hPa)

Notes:


1. Missed approach turn MAX IAS210kt.
2. **A** Approach after join HSN holding pattern and descend altitude by ATC due airspace restrictions only.



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.

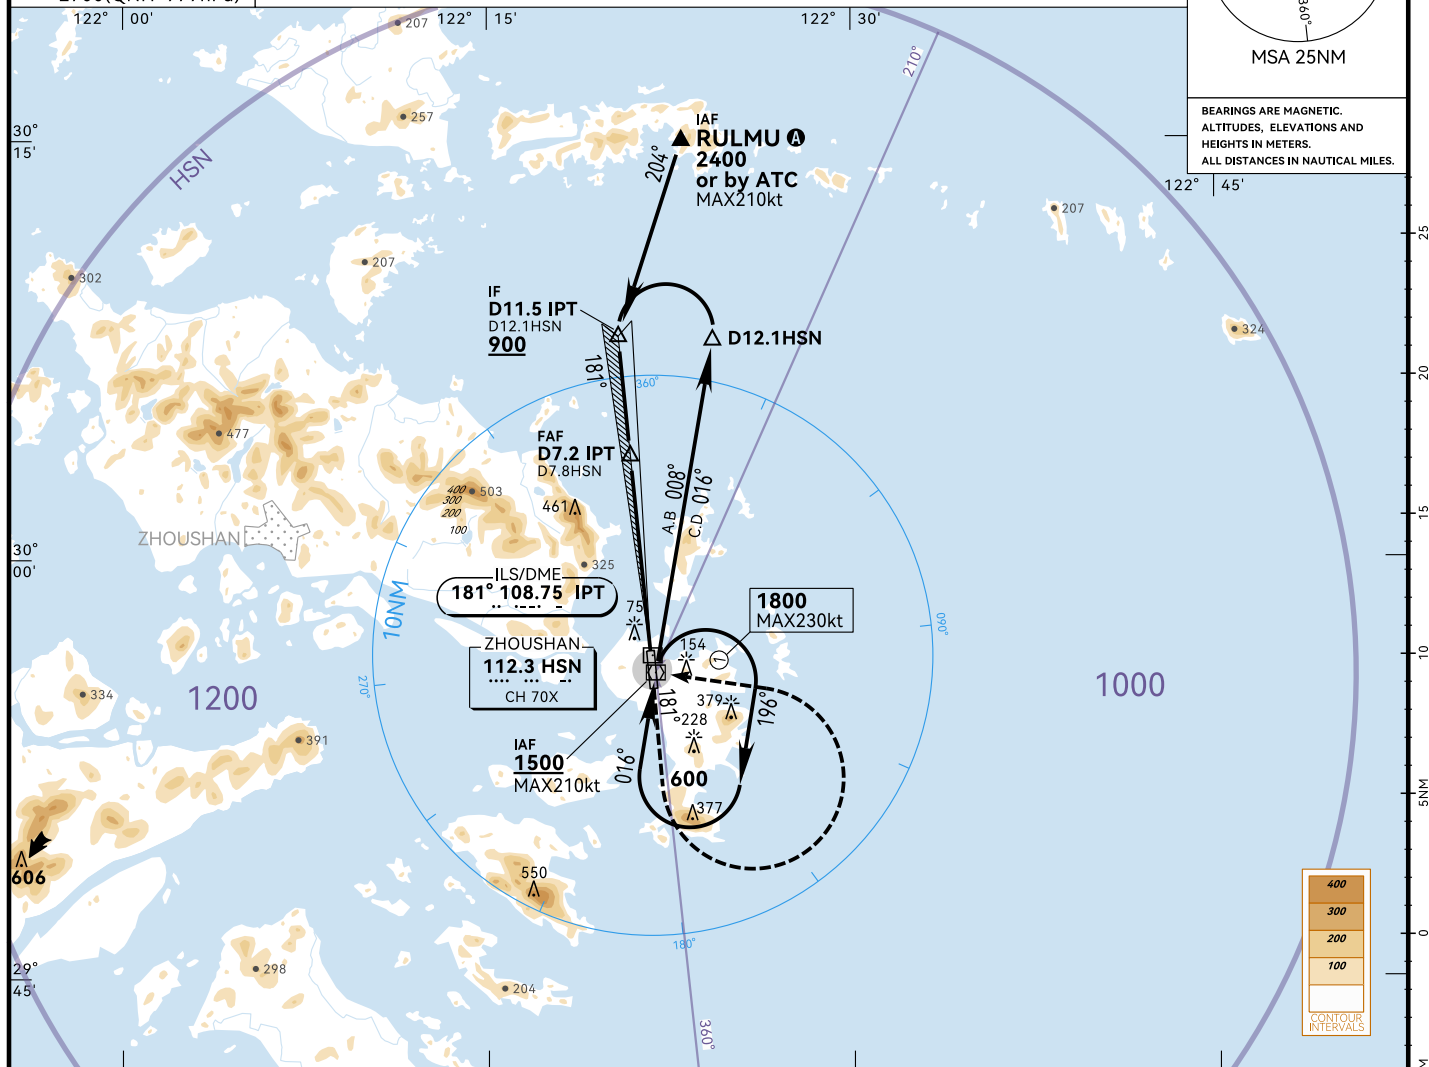

GP INOP	DME (IPT)	7	6	5	4	3			
	ALT	680	583	485	388	291			

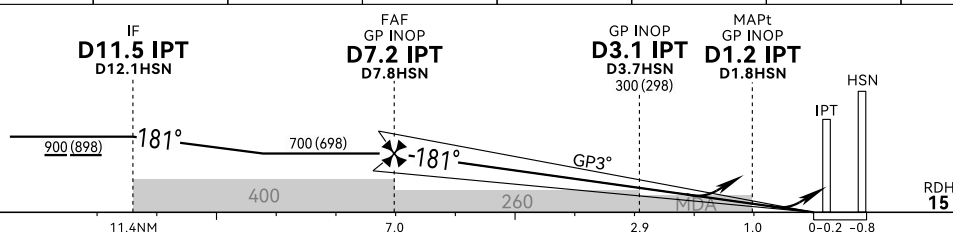

FAF-MAPt 6.0NM (GP INOP)						
GS kt	80	100	120	140	160	180
min:sec	4:30	3:36	3:00	2:34	2:15	2:00
GP 3°fom	420	530	640	740	850	960

B RVR550 can be implemented when using approved HUD or AP or FD for approach.

	ILS/DME MACG 5.0%				ILS/DME MACG 2.5%			GP INOP			CIRCLING			ILS HUD Special CAT MACG 5.0%			
	DA(H)	OCA(H)	RVR	VIS	DA(H)	OCA(H)	VIS	MDA(H)	OCA(H)	VIS	MDA(H)	OCA(H)	VIS	(DH)	(OCH)	(RA)	RVR
A	62(60) 62(60) B 800 800				142(140) 142(140) 2000			200(198) 190(188) 3200			490(488) 490(488) 4800			(45) (45) (46) 450			
B																	
C								200(198) 190(188) 3400			540(538) 540(538) 4800						
D								200(198) 190(188) 3600			600(598) 600(598) 5000						

Changes: Procedure, VAR, MSA, chart number.