


INSTRUMENT  
APPROACH  
CHART-ICAO  
ZUGY/KWE

VAR1.8°W

5L-3

AD ELEV 1138.9  
THR ELEV 1137.6

GUIYANG/Longdongbao  
RNAV ILS/DME z RWY01R

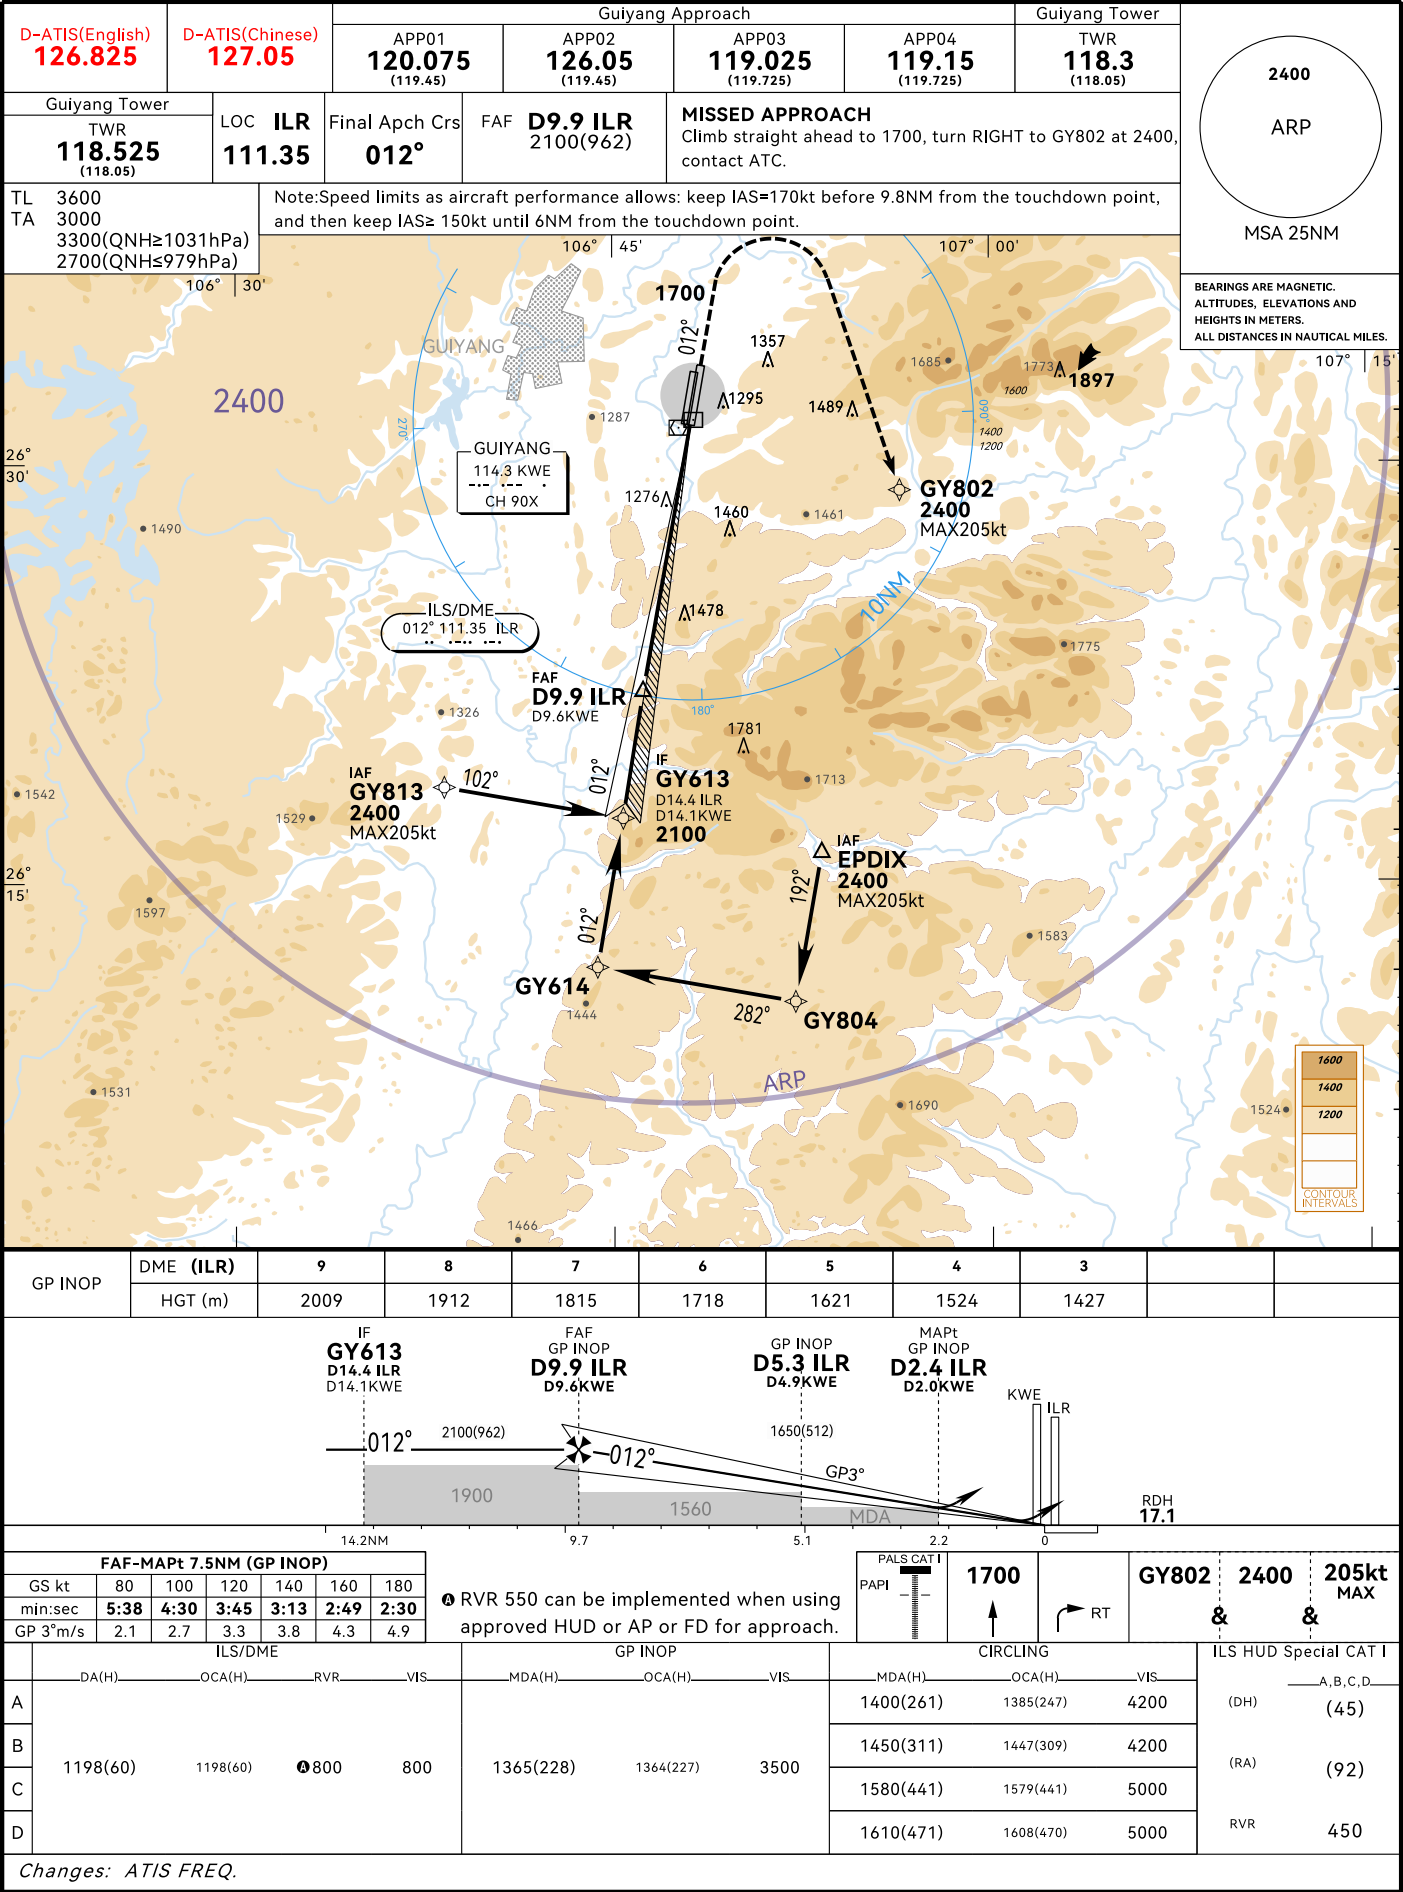

IF GY613  
D14.4 ILR  
D14.1KWE

FAF GP INOP  
D9.9 ILR  
D9.6KWE

GP INOP  
D5.3 ILR  
D4.9KWE

MAPt GP INOP  
D2.4 ILR  
D2.0KWE

KWE ILR

012°

2100(962)

1900

1560

1650(512)

GP3°

MDA

RDH 17.1

FAF-MAPt 7.5NM (GP INOP)

| GS kt    | 80   | 100  | 120  | 140  | 160  | 180  |
|----------|------|------|------|------|------|------|
| min:sec  | 5:38 | 4:30 | 3:45 | 3:13 | 2:49 | 2:30 |
| GP 3°m/s | 2.1  | 2.7  | 3.3  | 3.8  | 4.3  | 4.9  |

RVR 550 can be implemented when using approved HUD or AP or FD for approach.

PALS CAT I  
PAPI

1700

↑

RT

GY802 2400 205kt MAX

&

&

|   | ILS/DME  | GP INOP  | CIRCLING | ILS HUD Special CAT I |           |           |      |            |
|---|----------|----------|----------|-----------------------|-----------|-----------|------|------------|
|   | DA(H)    | OCA(H)   | RVR      | VIS                   | MDA(H)    | OCA(H)    | VIS  | A, B, C, D |
| A |          |          |          |                       | 1400(261) | 1385(247) | 4200 | (DH)       |
| B | 1198(60) | 1198(60) | 800      | 800                   | 1450(311) | 1447(309) | 4200 | (RA)       |
| C |          |          |          |                       | 1580(441) | 1579(441) | 5000 | (92)       |
| D |          |          |          |                       | 1610(471) | 1608(470) | 5000 | RVR 450    |

Changes: ATIS FREQ.