


D-ATIS(Chinese) 126.45
D-ATIS(English) 128.6
TWR 123.0(118.85) for RWY02L/20R
GND 121.85(121.7) for RWY02L/20R
Delivery 121.6(121.7)(DCL AVBL)

APN01 121.9
APN02 121.8
APN03 121.65

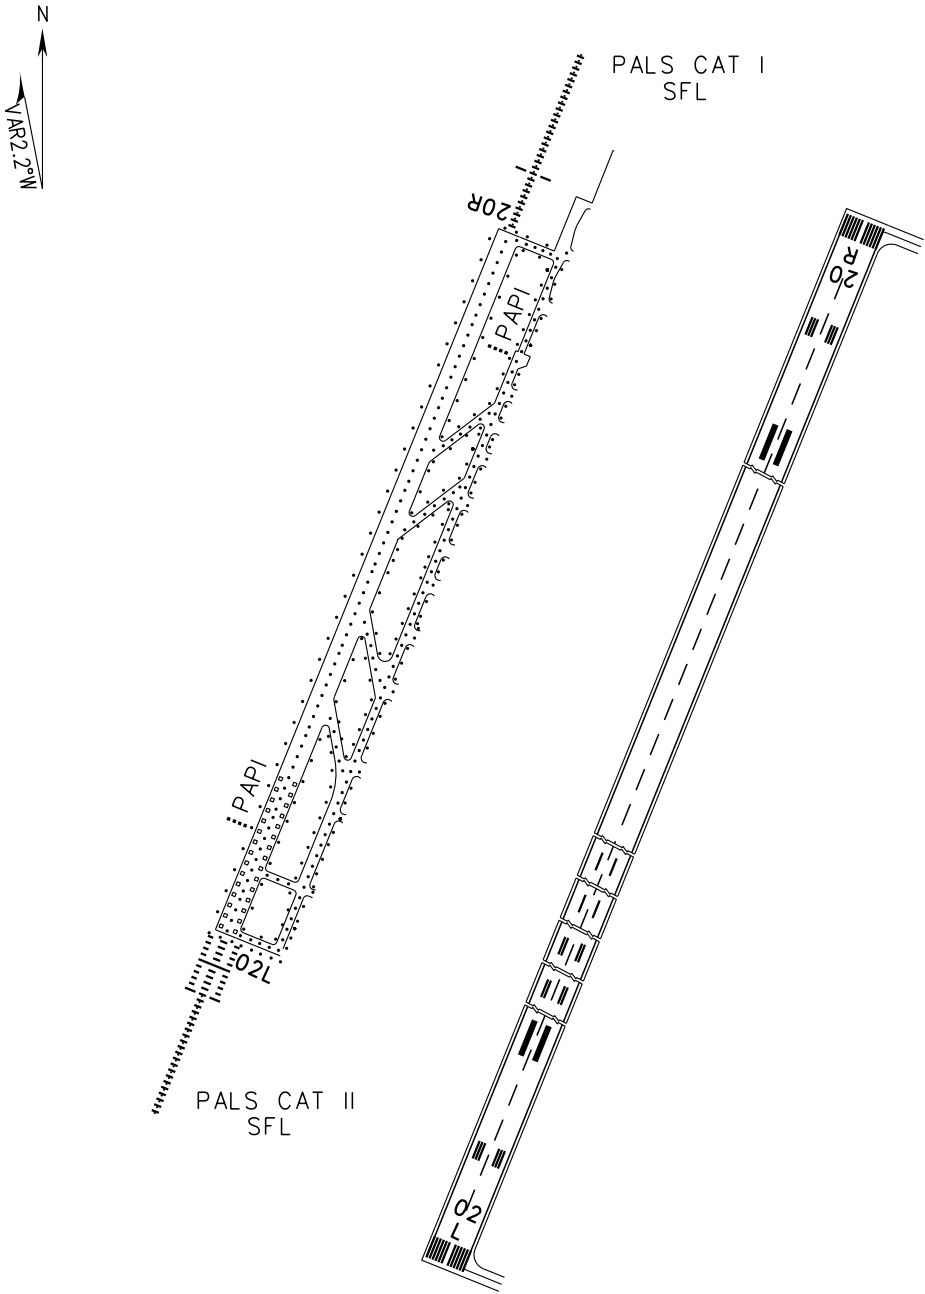

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)						LIGHTS			
ACFT Type		RWY02L/20R		LVP in force		RWY02L		RWY20R	
				RWY02L/20R	RWY02L				
		REDL	NIL(Day only)	REDL	RCLL	REDL	RCLL		
2 TURB ENG or 3&4 ENG	A	RVR400	RVR500	RVR200	RVR150	PALS CAT II SFL PAPI RTZL REDL RCLL RENL	PALS CAT I SFL PAPI REDL RCLL RENL		
	B								
	C			RVR250					
	D								
Other 1&2 ENG		RVR1600/VIS1600							
Note:									
Changes: D-ATIS.									