

INSTRUMENT
APPROACH
CHART-ICAO
ZUUU/CTU

5V-1


AD ELEV 512.4
THR ELEV 492.9

CHENGDU/Shuangliu
VOR/DME RWY02L


D-ATIS(Chinese) 126.45		D-ATIS(English) 128.6		Chengdu Approach				Shuangliu Tower	
				APP01 124.85 (127.7)	APP06 126.35 (125.25)	APP07 119.425 (123.825)	APP08 119.25 (123.825)	TWR 123.0 (118.85)	
VOR CTU 115.7	Final Apch Crs 020°	FAF D10.8 CTU 1500(1007)	MISSED APPROACH Climb straight ahead to D4.5CTU, turn RIGHT to BHS at 1800, contact ATC.			TL 3600 TA 3000 3300(QNH±1031hPa) 2700(QNH±979hPa)			

Notes:


1. Missed approach turning MAX IAS200kt.
2. Speed limits as aircrafts performance allows: keep IAS180kt before final leg until 8NM from the touchdown point, and then keep IAS 160kt until 6NM from the touchdown point.



BEARINGS ARE MAGNETIC.
ALTITUDES, ELEVATIONS AND
HEIGHTS IN METERS.
ALL DISTANCES IN NAUTICAL MILES.

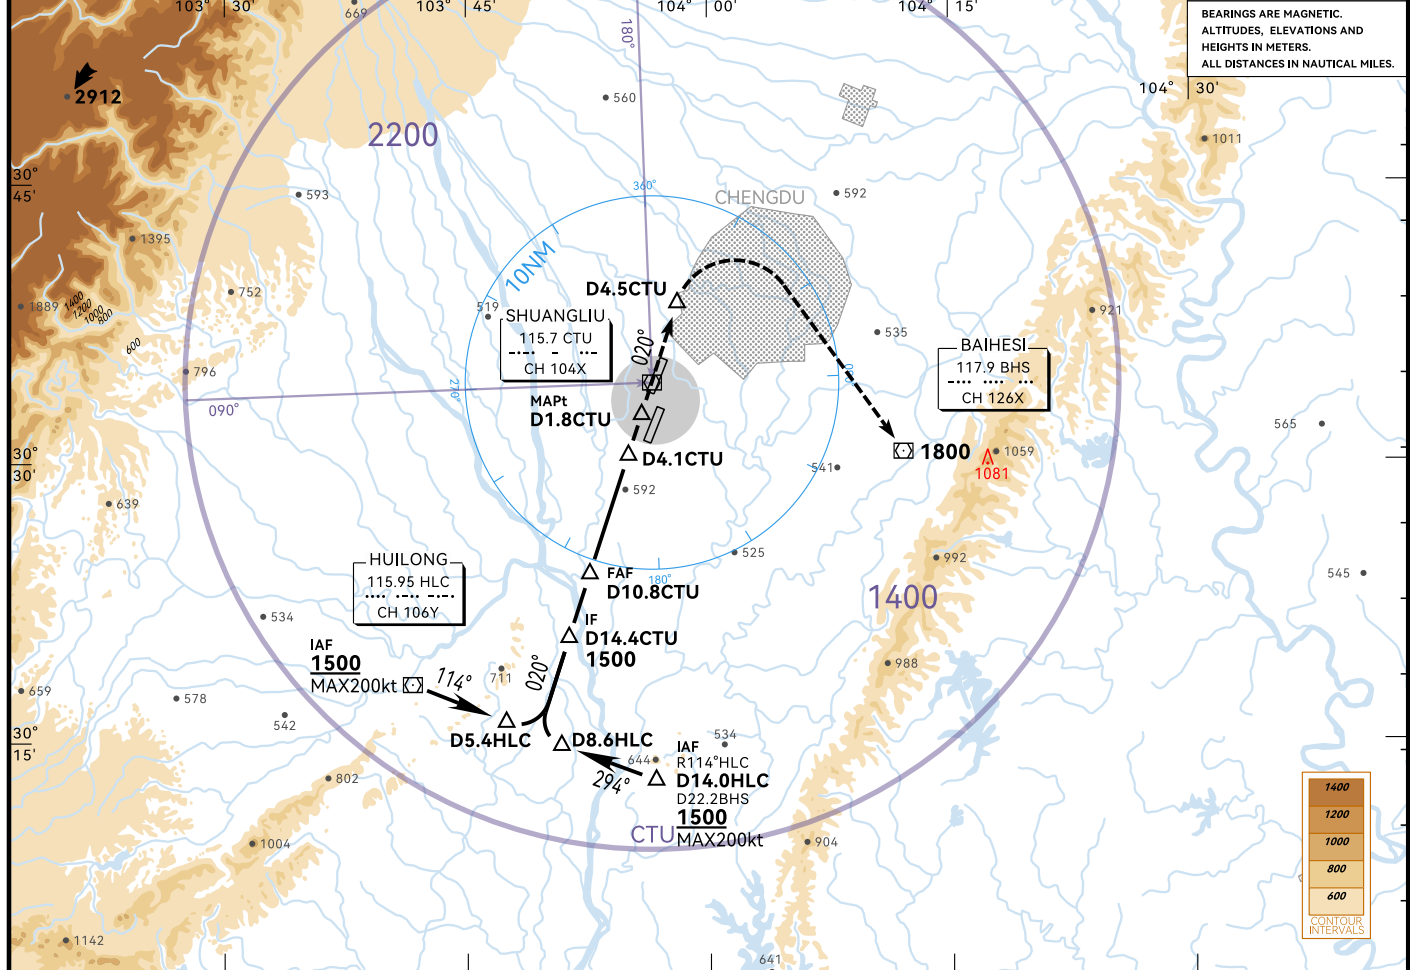

DME (CTU)	9	8	7	6	5	4	3	2		
ALT (m)	1322	1226	1130	1034	937	840	745	649		

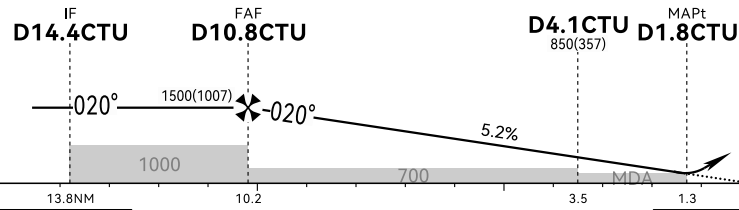

FAF-MAPt 8.9NM						
GS kt	80	100	120	140	160	180
min:sec	6:41	5:20	4:27	3:49	3:20	2:58
5.2m/s	2.1	2.7	3.3	3.8	4.3	4.9

 PALS CAT II PAPI	D4.5 CTU ↑	200kt MAX ↙ RT	BHS 117.9	1800
---	------------------------------	----------------------------------	----------------------	-------------

	VOR/DME				CIRCLING		
	MDA(H)	OCA(H)	RVR	VIS	MDA(H)	OCA(H)	VIS
A	630(137) 626(134) 1800 1800				700(188)	691(179)	2400
B							
C					740(228)	728(216)	3200
D					740(228)	728(216)	3600

Changes: D-ATIS, OBST.