


INSTRUMENT
APPROACH
CHART-ICAO
ZUUU/CTU

5V-2


AD ELEV 512.4
THR ELEV 495.4

CHENGDU/Shuangliu
VOR/DME RWY20R

D-ATIS(Chinese) 126.45		D-ATIS(English) 128.6		Chengdu Approach				Shuangliu Tower		
				APP01 124.85 (127.7)	APP06 126.35 (125.25)	APP07 119.425 (123.825)	APP08 119.25 (123.825)	TWR 123.0 (118.85)		
VOR CTU 115.7	Final Apch Crs 207°	FAF D8.5 CTU 1200(705)	MISSED APPROACH Climb straight ahead to D1.2 CTU, turn RIGHT to CZH at 1800, contact ATC.			TL 3600 TA 3000 3300(QNH≥1031hPa) 2700(QNH≤979hPa)				
Notes: 1. Missed approach turning MAX IAS200kt. 2. Speed limits as aircrafts performance allows: keep IAS180kt before final leg until 8NM from the touchdown point, and then keep IAS 160kt until 6NM from the touchdown point.										

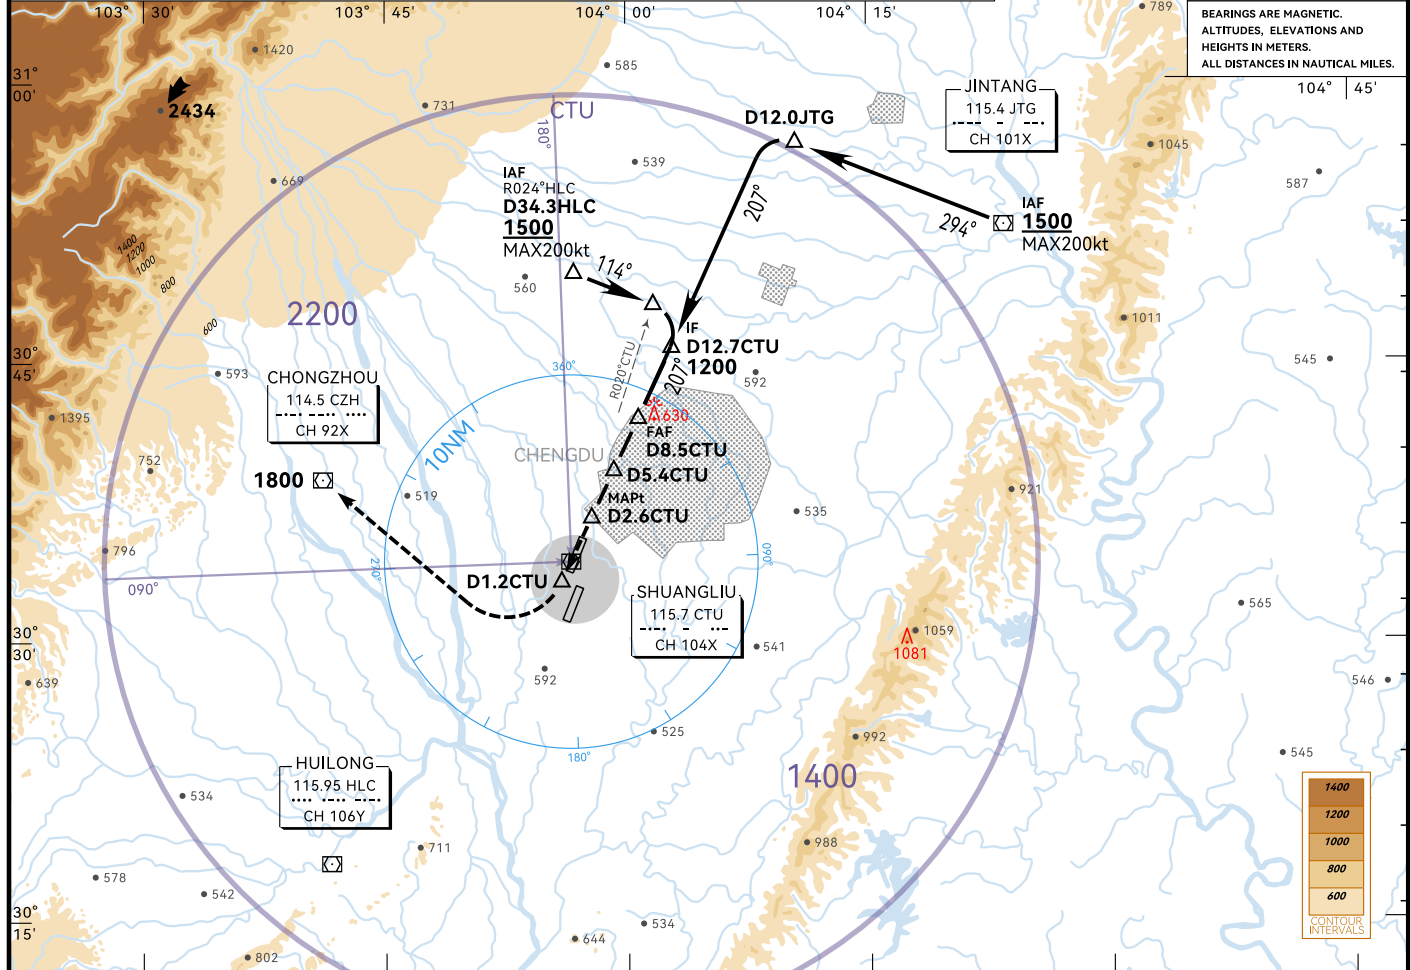

DME (CTU)	3	4	5	6	7	8				
ALT (m)	664	760	856	952	1048	1145				

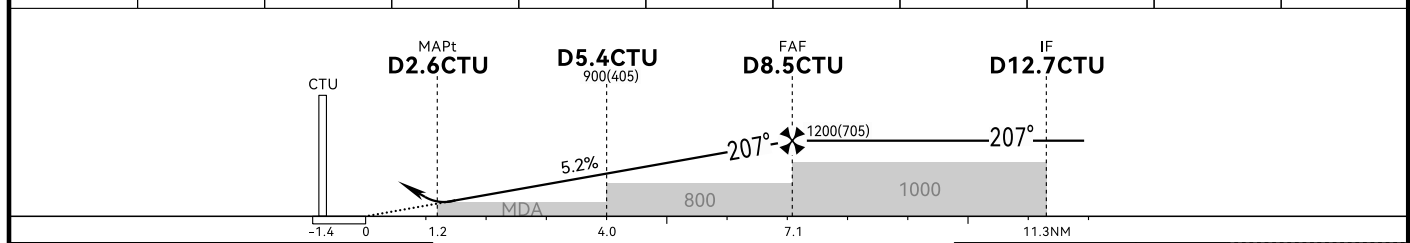

FAF-MAPt 5.9NM						
GS kt	80	100	120	140	160	180
min:sec	4:26	3:32	2:57	2:32	2:13	1:58
5.2% ^{m/s}	2.1	2.7	3.3	3.8	4.3	4.9

	VOR/DME				CIRCLING		
	MDA(H)	OCA(H)	RVR	VIS	MDA(H)	OCA(H)	VIS
A	630(135) 623(128) 1700 1700				700(188)	691(179)	2400
B							
C					740(228)	728(216)	3200
D					740(228)	728(216)	3600

Changes: D-ATIS, OBST.