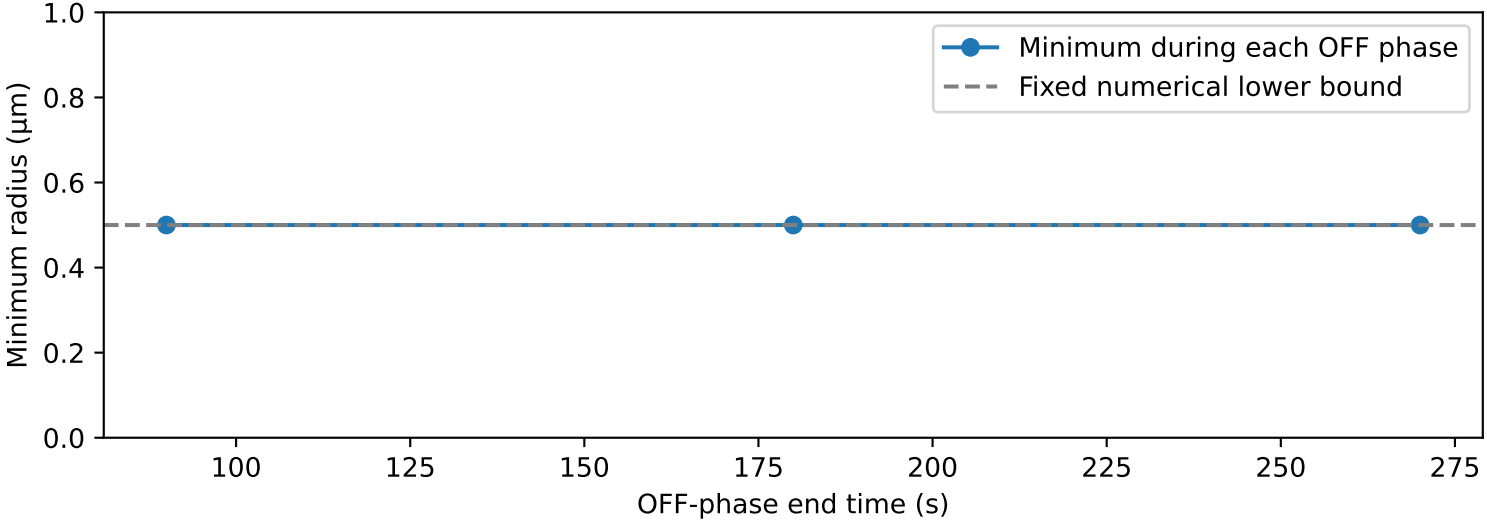
Minimum during each OFF phase
Fixed numerical lower bound
Minimum radius (μm)
OFF-phase end time (s)
1.0
0.8
0.6
0.4
0.2
0.0
100
125
150
175
200
225
250
275