

AquaCell

Technical Bulletin TB101

AquaCell load capacity testing results by TRI Environmental

Objective

1. Determine the load carrying capacity of the AquaCell system in a controlled environment.

Test Method

2. AquaCell units (standard and extra strong configurations) were subjected to a compressive load in a controlled environment until failure.
 - a. Compression testing was based on a bench-scale compression test ASTM D2412.
 - b. Test was modified to apply compressive load at constant 2.0% rate at height of chamber per minute as directed by ASTM F2418 & ASTM F2922.
 - c. Load was applied until module failure, or the maximum capacity of 135,000 lbs. was reached.
 - d. No backfill or finished pavement was present during testing (test module only).

Test Results

3. Standard Configuration:
 - a. Average maximum compressive load: 77,779 lbs.
 - b. Exceeds HS-20 load rating (72,000 lbs)

Product	Test Specimen	Maximum Compressive Load (lb)	Maximum Compressive Stress (psi)	Extension at Max Load (in)
AquaCell Standard Configuration	1	76,824	69.2	0.926
	2	78,043	70.3	0.943
	3	78,470	70.7	0.949
	Avg.	77,779	70.0	0.939

4. Extra Strong Configuration:
 - a. Average maximum compressive load: 117,839 lbs.
 - b. Exceeds HS-25 load rating (90,000 lbs)

Product	Test Specimen	Maximum Compressive Load (lb)	Maximum Compressive Stress (psi)	Extension at Max Load (in)
AquaCell Extra Strong Configuration	1	117,681	106.0	1.143
	2	118,891	107.1	1.155
	3	116,944	105.3	1.152
	Avg.	117,839	106.1	1.150

Discussion

5. The AquaCell system demonstrated significant load carrying capacity in both standard and extra strong configurations. The standard configuration achieved an average maximum compressive load exceeding the HS-20 rating, with the expectation that backfill, and finished pavement will further improve load distribution and performance. The extra strong configuration exceeded the HS-25 load rating, suitable for the most demanding commercial applications.

Conclusion

6. Based on testing, the AquaCell system can be utilized in the following load classifications
 - a. ASHTO H-20, HS-20, H-25 (Standard Configuration)
 - b. AASHTO HS-25 (Extra Strong Configuration)

Note

1. AASHTO refers to the American Association of State Highway and Transportation Officials.
2. Testing completed at TRI Environmental, Austin, Texas.
 - a. Results referenced from TRI log number 24-001165 dated April 23, 2024.

Disclaimer

The information in this bulletin is for general guidance only. Wavin (Orbia) makes no warranties, express or implied, about the completeness, accuracy, or suitability of the content in this technical bulletin for a specific project. Any reliance using this information in the design of a project is at your own risk. Wavin (Orbia) shall not be liable for any loss or damage arising from the use of the information contained in this bulletin. Wavin (Orbia) reserves the right to update or revise the information in this bulletin at any time without notice.

Orbia's Building and Infrastructure business Wavin is an innovative solutions provider for the global building and infrastructure industry. Backed by more than 60 years of product development experience, Wavin is advancing life around the world by building healthy, sustainable environments for global citizens. Whether it's to improve the distribution of clean drinking water, to make sanitation accessible for everyone, to create climate resilient cities, or to design comfortable living spaces, Wavin collaborates with municipal leaders, engineers, contractors, and installers to help future-proof communities, buildings and homes. Wavin has 12,000+ employees around 65 production sites worldwide, serving over 80 countries through a global sales and distribution network.

Wavin 950 Winter Street, South Entrance 1st Floor, Waltham, MA 02451, United States | Phone US 514-735-3632 / 1800-763-3632 | E-mail wavin.northamerica@wavin.com | wavin.us

© 2024 Wavin Wavin reserves the right to make alterations without prior notice. Due to continuous product development, changes in technical specifications may change. Installation must comply with the installation instructions.

Photos




Pre-Test



Post-Test



Compression Test Results
TRI Client: Wavin USA
Product: Aquacell Standard

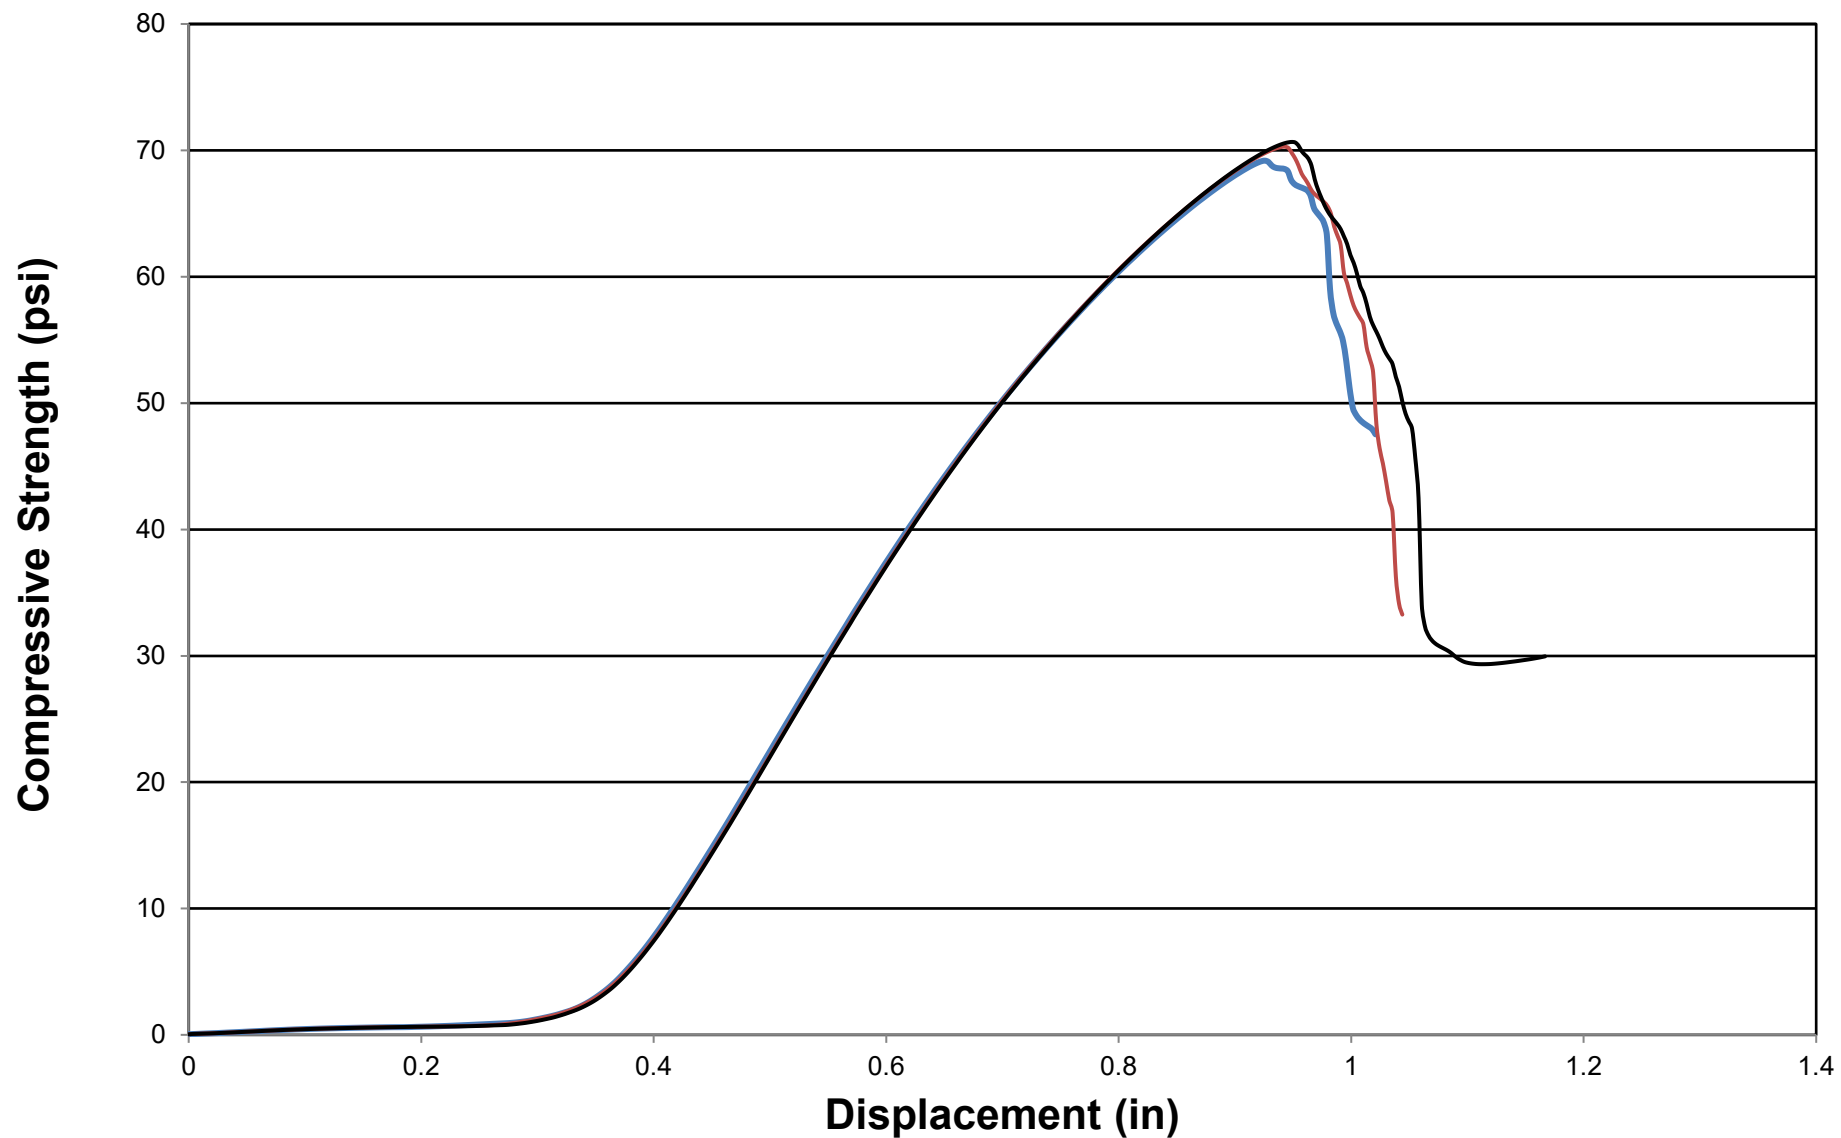

Photos




Pre-Test



Post-Test



Compression Test Results
TRI Client: Wavin USA
Product: Aquacell Extra Strong

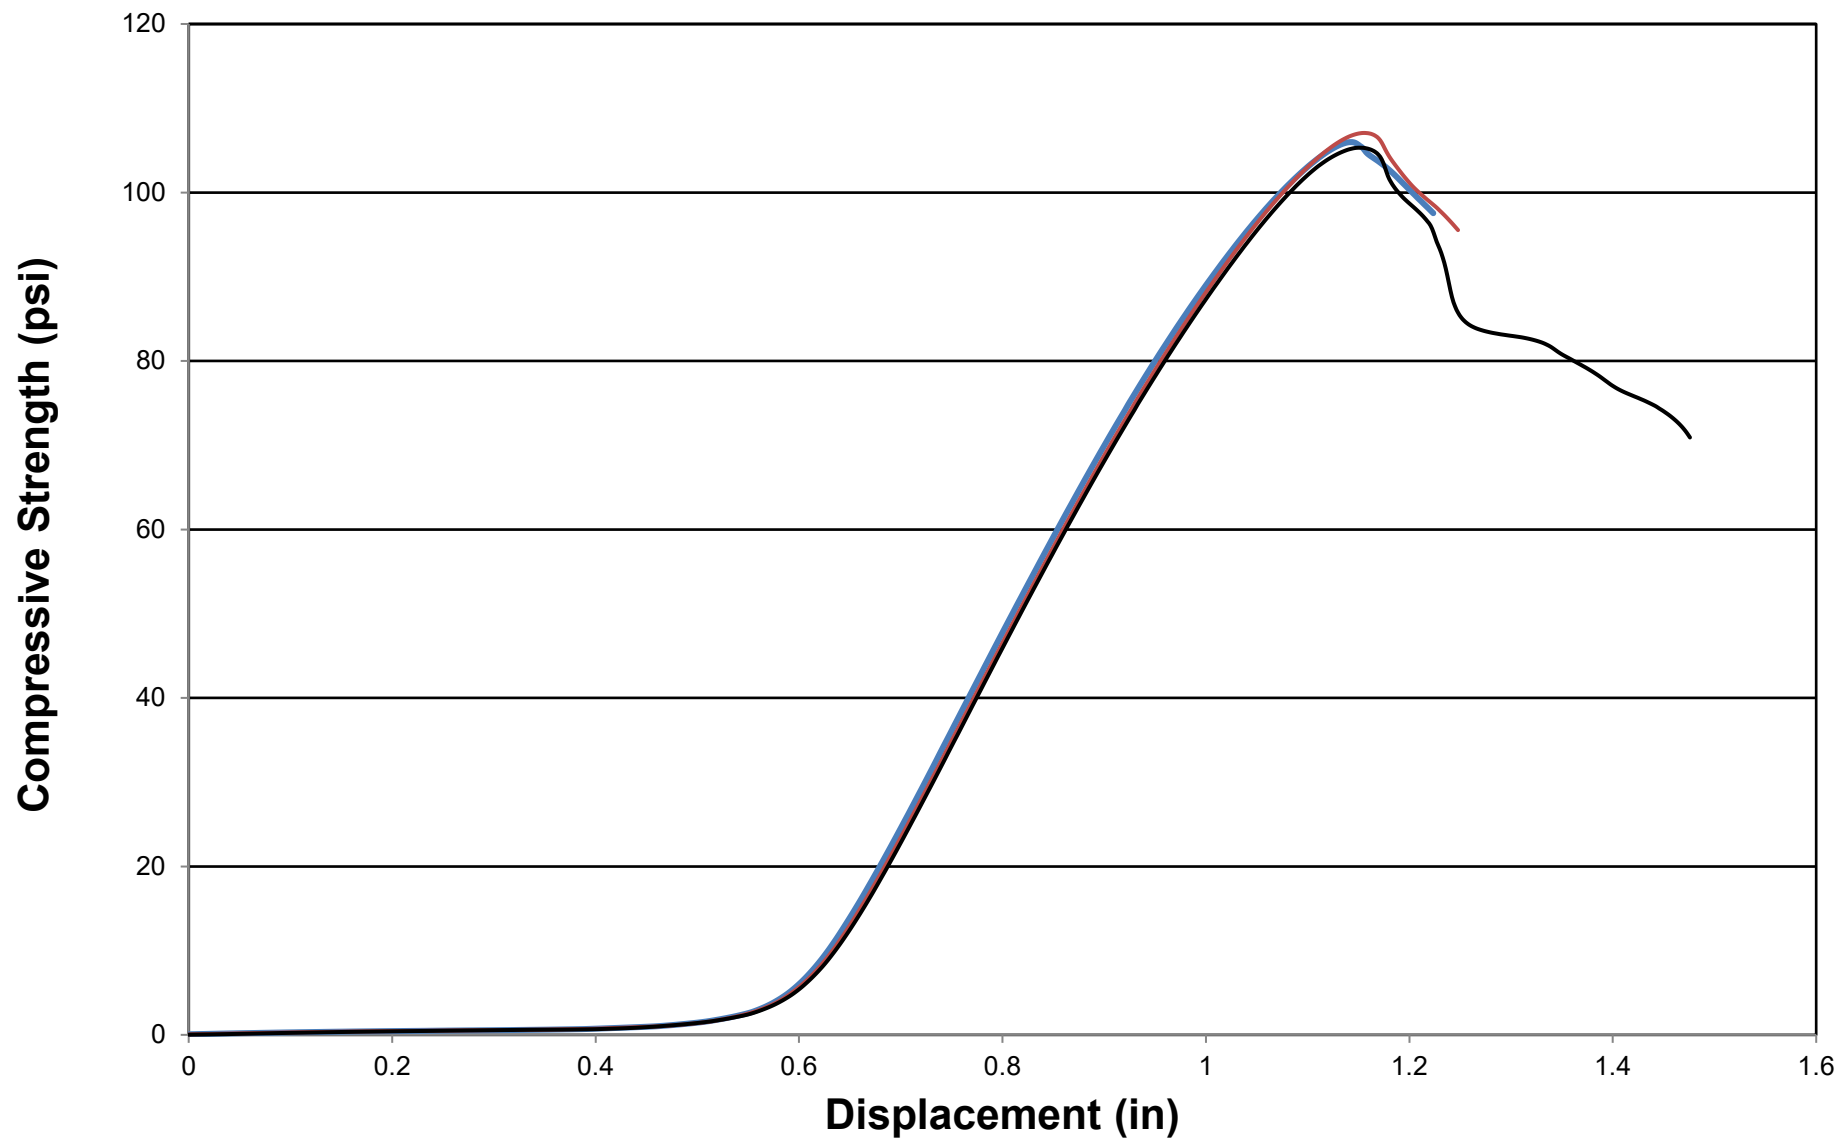

January 6, 2025

Technical Bulletin TB102

AQUACELL load capacity testing results by TRI Environmental

Objective

The objective was to evaluate the structural integrity and performance of AquaCell stormwater crates in two configurations (Standard & Extra Strong) under lateral compression.

Test Method

The testing was performed following a modified version of the ASTM D2412 standard, which is the Standard Test Method for Determination of External Loading Characteristics of Plastic Pipe by Parallel-Plate Loading.

The modifications included:

- **Loading Rate:** Compressive load applied at a constant rate of 2.0% of the chamber height per minute.
- **Standards Referenced:**
 - ASTM F2418: Standard Specification for Polypropylene (PP) Corrugated Wall Stormwater Collection Chambers.
 - ASTM F2922: Standard Specification for Polyethylene (PE) Corrugated Wall Stormwater Collection Chambers.

Test Results

1) Standard Configuration:

- a) Average maximum compressive stress applied laterally: 17.2 psi
- b) Tested with two side plates to be considered a complete unit with columns.

Product	Test Specimen	Maximum Compressive Load(lb)	Maximum Compressive Stress (psi)	Extension at Max Load (in)
Aquacell Standard Configuration - Lateral	1	14,239	18.0	0.922
	2	13,107	16.6	0.873
	3	13,590	17.2	0.994
	Avg.	13,645	17.2	0.930

2) Extra Strong Configuration:

- a) Average maximum compressive stress applied laterally: 26.4 psi
- b) Tested with two side plates to be considered a complete unit with columns.

Product	Test Specimen	Maximum Compressive Load(lb)	Maximum Compressive Stress (psi)	Extension at Max Load (in)
Aquacell Extra Strong Configuration - Lateral	1	22,453	26.4	1.166
	2	22,354	26.3	1.210
	3	22,551	26.5	1.264
	Avg.	22,453	26.4	1.213

Discussion

The Aquacell stormwater crates demonstrated robust performance under lateral compression. The Aquacell Standard (SD) configuration showed an average maximum compressive load of 13,645 lbs and an average maximum compressive stress of 17.2 psi. The Aquacell Extra Strong (EX) configuration exhibited an average maximum compressive load of 22,453 lbs and an average maximum compressive stress of 26.4 psi. These results indicate that both configurations possess the structural integrity required for effective stormwater management applications, with the expectation that backfill, and finished pavement will further improve load distribution and performance.

Conclusion

Based on testing, and as supplement to the TB-101 Technical Bulletin regarding vertical compression strength, the AQUACELL system can be utilized in the following load classifications

- a) AASHTO H-20, HS-20, H-25 (Standard Configuration)
- b) AASHTO HS-25 (Extra Strong Configuration)

Note

- 1) AASHTO refers to the American Association of State Highway and Transportation Officials.
- 2) Testing completed at TRI Environmental Inc., Austin, Texas.
 - a. Results referenced from TRI log number 24-005619 dated December 19, 2024.

Disclaimer

The information in this bulletin is for general guidance only. Wavin (Orbia) makes no warranties, express or implied, about the completeness, accuracy, or suitability of the content in this technical bulletin for a specific project. Any reliance using this information in the design of a project is at your own risk. Wavin (Orbia) shall not be liable for any loss or damage arising from the use of the information contained in this bulletin. Wavin (Orbia) reserves the right to update or revise the information in this bulletin at any time without notice.

Photos




Pre-Test



Post-Test




Compression Test Results
TRI Client: Wavin USA
Product: Aquacell Standard - Lateral

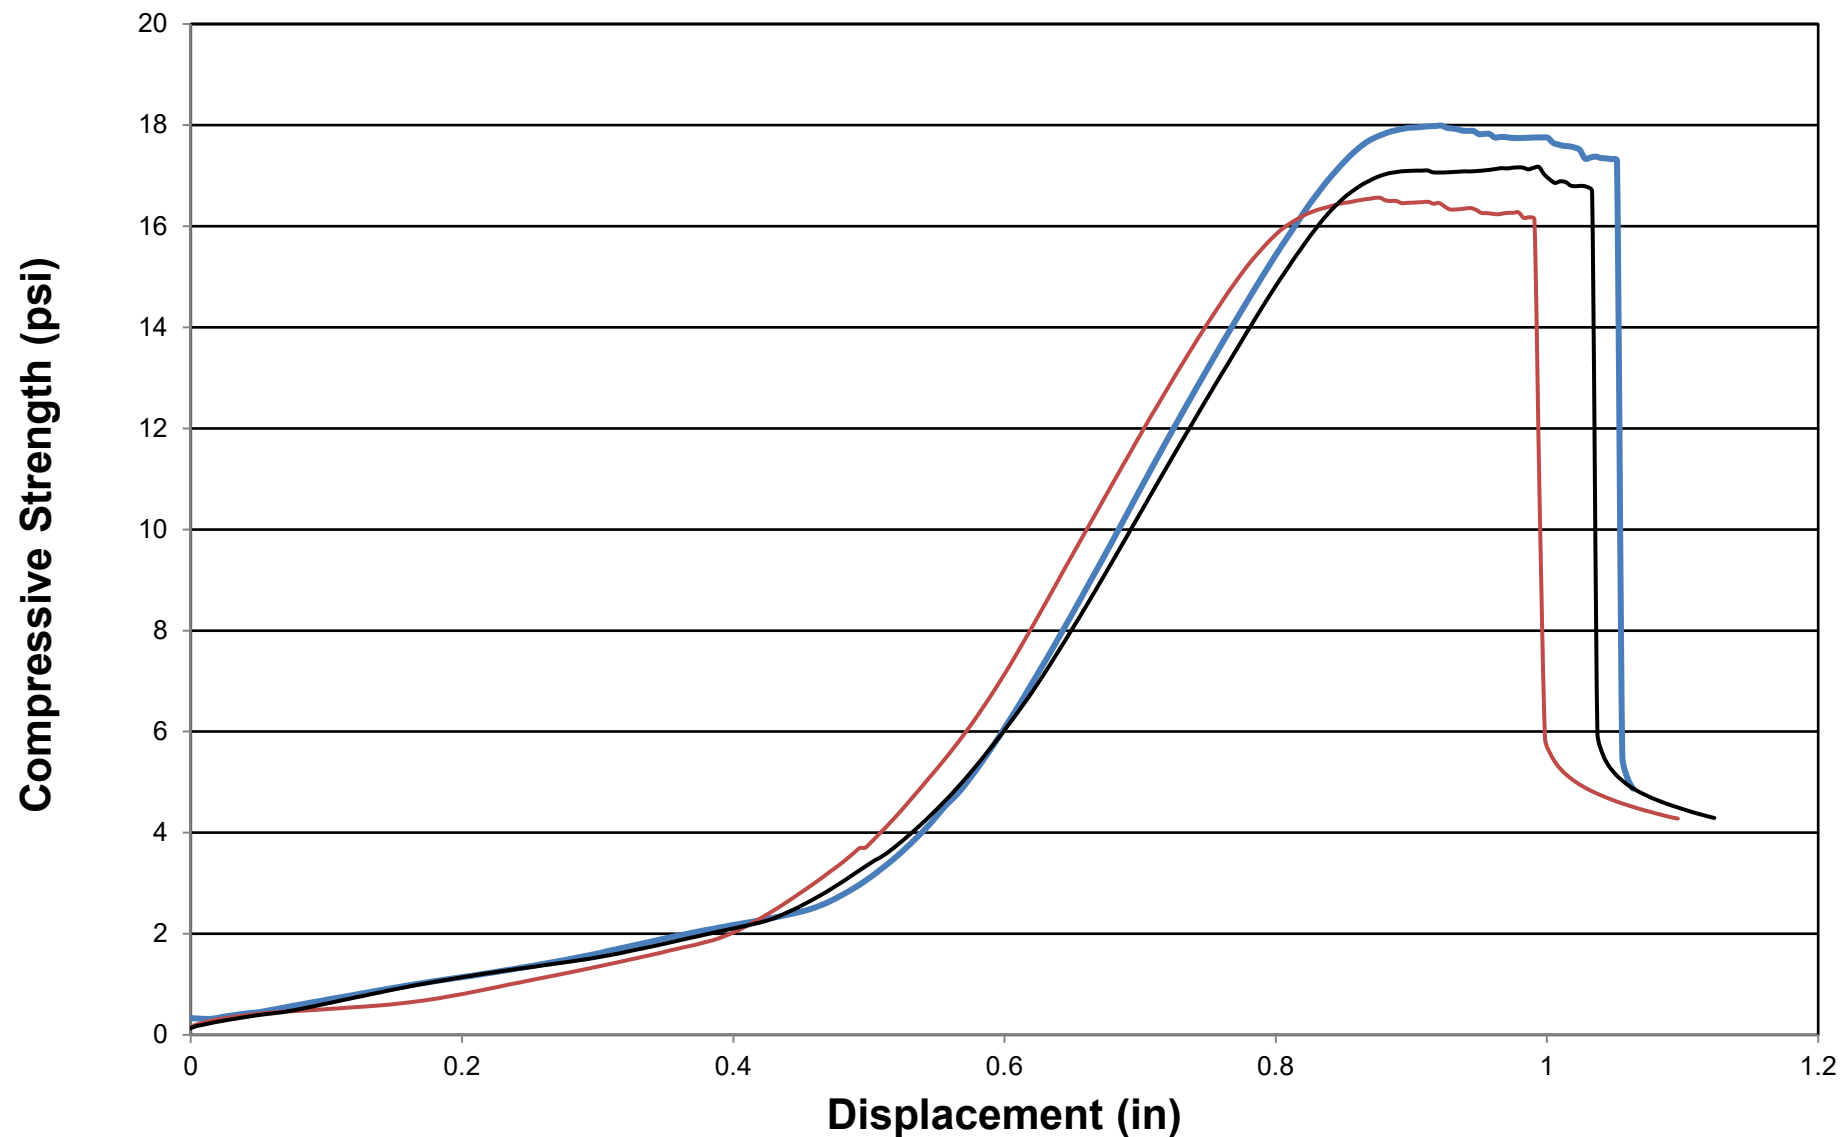

Photos



Pre-Test

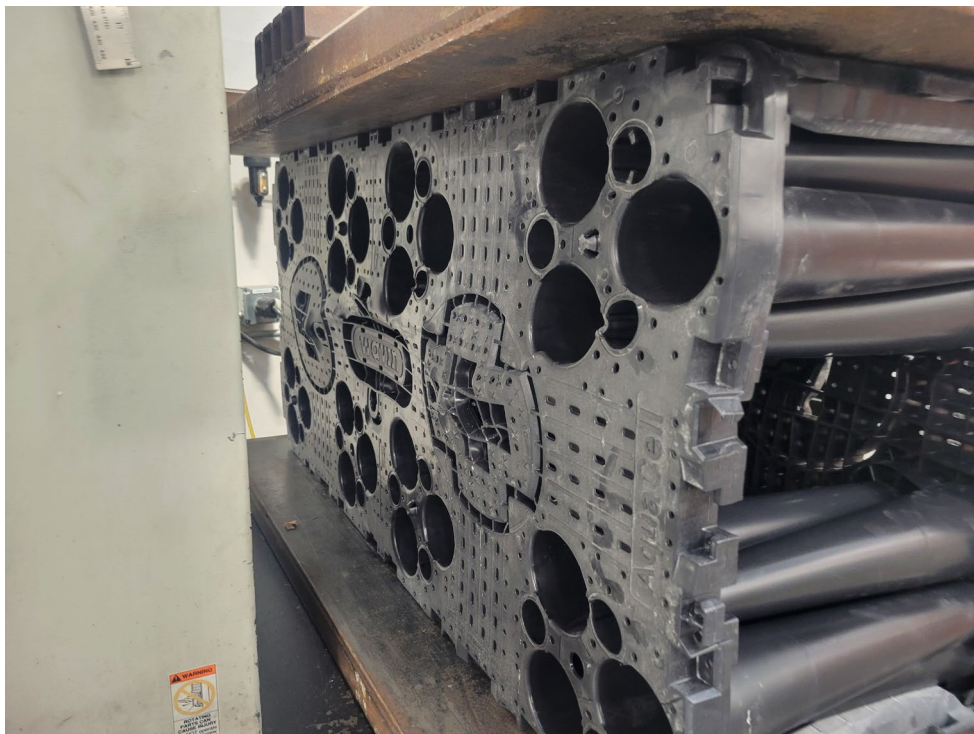

Post-Test



Compression Test Results
TRI Client: Wavin USA
Product: Aquacell Extra Strong - Lateral

