

Temperature Effects on Phosphor Fluorescence Lifetime

Micah Hillman

Cordney Nash

September 16, 2024

Introduction

Europium-doped phosphor compounds can exhibit temperature-dependent fluorescence lifetimes for certain emission lines. In europium-doped lanthanum oxysulfide ($\text{La}_2\text{O}_2\text{S:Eu}$), the variable overlap of a charge-transfer (CT) state with the $^5\text{D}_i$ energy levels leads to an increased availability of non-radiative de-excitation pathways as temperature is increased. For lower temperatures, the CT state becomes less available and radiative emission dominates, leading to longer fluorescence lifetimes. We measured fluorescence lifetimes for a sample of $\text{La}_2\text{O}_2\text{S:Eu}$ between -10°C and 100°C , and observed a (linear/logarithmic) decrease in decay lifetimes for increasing temperatures.

Methods

To modulate its temperature, the phosphor sample was mounted on a Peltier device attached to a manually-variable current source. Focused light from a pulsing laser diode shone on the surface of the sample, causing fluorescence at the 514 nm, $^5\text{D}_2$ emission line (among others). Fluoresced light was then band-passed and focused into a photomultiplier tube (PMT). The PMT-amplified fluorescence response signal was then passed with the original impulse signal to be overlaid on a digital oscilloscope for data collection.

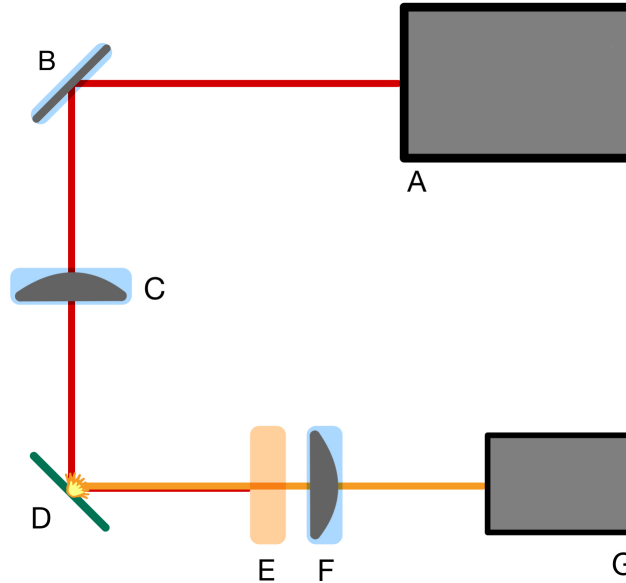


Figure 1. *Caption formatting test.*

After setting the pulse width of the laser diode to approximately $1\ \mu\text{s}$, we began varying the current supplied to the Peltier device to set the temperature at approximate steps of $10\ ^\circ\text{C}$ ranging from $-10\ ^\circ\text{C}$ to $100\ ^\circ\text{C}$. Three snapshots of oscilloscope data were collected at each increment, where the oscilloscope timing window was variably tuned to meet the following specifications:

1. maximize timing resolution by including as many non-zero response values as possible, and
2. include information about the fluorescence response's offset prior to the laser impulse (for offset subtraction during analysis).

Results

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a,

magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.