

A Web Application to help design monitoring programmes to assess the effectiveness of freshwater restoration actions in New Zealand

Michael Kittridge¹, Olivier Ausseil², Laura Keenan², Alasdair Noble³, David Hamilton⁵, Zeb Etheridge^{6,7}, Matt Dumont⁶, Laura Kelly⁸, Joanne Clapcott⁸, and Richard McDowell^{3,4}

¹ Headwaters Hydrology, Wellington, New Zealand ² Traverse Environmental, Wellington, New Zealand ³ AgResearch, Lincoln Science Centre, Lincoln, New Zealand ⁴ Faculty of Agriculture and Life Sciences, Lincoln University, Lincoln, New Zealand ⁵ Australian Rivers Institute, Griffith University, Queensland, Australia ⁶ Komanawa Solutions Ltd, Christchurch, New Zealand ⁷ School of Earth and Environment & Waterways Centre for Freshwater Management, University of Canterbury, New Zealand ⁸ Freshwater Group, Cawthron Institute, Nelson, New Zealand

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

The interactive web application provides guidance for designing a freshwater monitoring programme in New Zealand. In particular, the web application can be used to guide where, how often, and for how long a river, lake or groundwater site should be monitored to be able to reliably detect improvements in certain freshwater contaminants. The improvements can be targeted improvements, entered by the user, or predicted improvements modelled by the application based on upstream land mitigation actions. The design of the monitoring programme, such as the sampling frequency and duration, can be varied by the user to see how the detection power of the monitoring programme is affected. The application presents results in an interactive map, which allows the user to assess spatial variation (for example, across a catchment) in modelled freshwater improvements resulting from mitigation actions and in the detection power of a proposed monitoring regime. Further information about the methods used in the application and potential ways of implementing the application can be found in McDowell et al. (2024).

The software was developed in [Python](#) using [Dash](#), can be run using [Docker](#), and can be deployed using [Docker Swarm](#). The code repository is stored on [GitHub](#). The deployed WebApp and supporting documentation (including a user guide) are available at www.monitoringfreshwater.co.nz.

Statement of need

Land-based mitigation actions require considerable time and financial investment to reduce the loss of nutrients (nitrogen and phosphorus), sediment, and faecal bacteria from land into freshwater environments. Monitoring of freshwater environments is important to determine the effectiveness of mitigation actions. However, due to natural variability, changes in water quality and ecological indicators in a water body can be difficult to detect. Freshwater monitoring programmes should therefore be carefully designed to ensure they have adequate statistical power to be able to detect improvements in contaminant concentrations or ecological indicators. Good monitoring programme design can prevent years of wasted effort and expense.

Under current New Zealand legislation, regional authorities must set targets for various

“attributes” in water bodies, such as nutrient concentrations and water clarity. Monitoring to evaluate progress towards achieving these targets is required; however, current monitoring frequencies vary from quarterly (e.g., in many lakes) to monthly in most rivers and quarterly or annual in groundwater. This may not be frequent enough to detect improvements. Based on these two related needs, the application has two main purposes:

1. Model the expected improvement in in-river and in-lake contaminant concentrations resulting from land-based mitigation actions in a catchment. These can be defined by the user or based on default settings.
2. Calculate the statistical power of a river, lake or groundwater monitoring regime to detect modelled (Step 1 above) or target (user-defined) improvements, either at a specified location or throughout a river network or lake.

Application components

Land cover and associated land mitigation improvements

The reduction in the losses of each of the four main contaminants (nitrogen, phosphorus, sediment, and *E.coli*) from land is a necessary input dataset for modelling the improvements for in-river and in-lake contaminant loads (Step 1 above). Users can upload their own improvements layer for a catchment of interest, or utilise a default layer we have developed for all of New Zealand. We used the New Zealand Land Cover Database (LCDB) version 5 (Barnes, 2020) as a base layer, but edited it based on pastoral land use typologies (Richard W. McDowell & Depree, 2021). Each land cover or land type was associated with maximum “mitigatable” reductions in the loss of each contaminant (using information in Richard W. McDowell & Depree (2021) for pastoral land use and other literature values for the other land cover types). Mitigatable reductions do not include contaminant concentrations expected under natural conditions (McDowell R. W., 2013).

Rivers

The rivers dashboard contains six modules providing guidance on the likelihood of detecting changes in a range of key water quality and ecological indicators at existing monitoring sites and across the whole stream network of the selected catchment.

The land mitigation module is dedicated to visualising the potential contaminant loss reductions from land parcels in a selected catchment. These reductions are then routed through the stream network to determine modelled in-river improvements which can be visualised. The “Water Quality-Catchment” module uses the modelled land mitigation improvements described above (Figure 1) and the “Water Quality-Monitoring Sites” module allows the user to specify a target improvement for each monitoring site. In both modules, the user can then input various combinations of monitoring frequency and duration and the application calculates the likelihood of being able to detect the modelled or target in-river improvements.

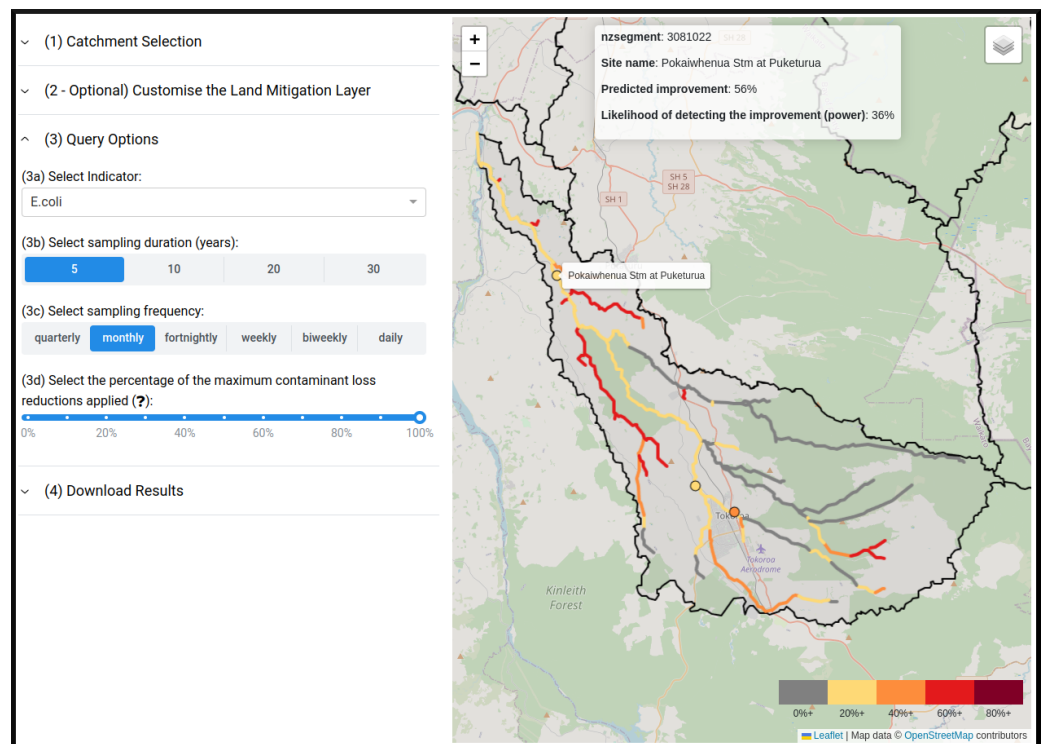


Figure 1: Example of the Rivers Water Quality - Catchments module. A catchment has been selected with the associated query options. The river reaches are colored (and selectable) according to the estimated power.

77 A fourth module allows the user to see stream reaches that have a high contribution of
78 contaminant loads during high river flows (above the 90th percentile). This allows the user to
79 evaluate the risk of poorly characterising annual contaminant loads if high-flow events are not
80 captured by the monitoring programme.

81 The final two modules are for ecological parameters (a macroinvertebrate index, periphyton,
82 and deposited sediment). In the first module, the user defines a target improvement at each
83 monitoring site and the application calculates the likelihood of being able to detect the target
84 improvement based on the user-defined monitoring frequency and duration. In the other
85 module, the application provides qualitative guidance on where the user should monitor within
86 a catchment based on where the greatest improvements in ecological indicators are likely to
87 occur.

88 Lakes

89 The lakes dashboard encompasses two modules with four lake water quality attributes each.
90 The first module uses the land mitigation improvements layer for the lake's catchment (as
91 described above) and routes the contaminant improvements down the stream network to
92 estimate the contaminant improvement at each lake. In the second module, the user directly
93 specifies a target improvement in one water quality attribute at existing monitoring sites. In
94 both modules, the user then inputs the frequency and duration of the monitoring programme
95 and the application calculates likelihood (power) of being able to detect the modelled or target
96 improvement at the lake.

97 **Groundwater**

98 The groundwater dashboard does not use the land mitigation improvements layer. Instead, the
99 user inputs a target percentage reduction in median nitrate-N concentration for all groundwater
100 wells in a region. The user is then able to specify various combinations of the monitoring
101 regime (frequency and duration). The application will then calculate the likelihood of the
102 monitoring regime being able to detect that improvement for all wells in the region.

103 **References**

- 104 Barnes, M. (2020). *LCDB v5.0 - Land Cover Database version 5.0, Mainland, New Zealand*.
105 Landcare Research. <https://doi.org/10.26060/W5B4-WK93>
- 106 McDowell R. W., C. N., Snelder T. H. (2013). Establishment of reference or baseline conditions
107 of chemical indicators in new zealand streams and rivers relative to present conditions.
108 *Marine and Freshwater Research*, 64, 387–400. <https://doi.org/10.1071/MF12153>
- 109 McDowell, R. W., Noble, A., Kittridge, M., Ausseil, O., Doscher, C., & Hamilton, D. P. (2024).
110 Monitoring to detect changes in water quality to meet policy objectives. *Scientific Reports*,
111 14(1), 1914. <https://doi.org/10.1038/s41598-024-52512-7>
- 112 Richard W. McDowell, C. S., Ross M. Monaghan, & Depree, C. (2021). Quantifying con-
113 taminant losses to water from pastoral land uses in new zealand III. What could be
114 achieved by 2035? *New Zealand Journal of Agricultural Research*, 64(3), 390–410.
115 <https://doi.org/10.1080/00288233.2020.1844763>