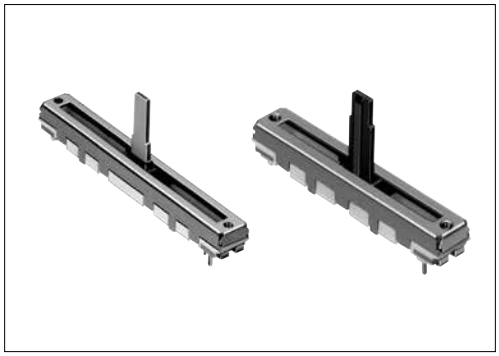
RS □□1 Super Slide™ (Standard Type)

Solderable with auto dipping and available in a wide variety



Typical Specifications

Items	Specifications
Total resistance tolerance	±20%
Maximum operating voltage	Please see P.392
Operating force	0.3 to 2.5N
Operating life	15,000 cycles
Operating temperature range	−25℃ to +70℃

Product Line

Insulated lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever (L1) (mm)	Total resistance (k Ω)	Resistance taper	Detent	Mounting plate	Minimum order unit (pcs.) Japan	Minimum order unit (pcs.) Export	Products No.	Drawing No.
Single-unit	20	J-1	5	10	1B	Without	Without	700	2,800	**RS201111J011**	1
	30				15A			600	2,400	**RS301111J00P**	2
					1B		With			**RS30111AJ01R**	3
				50			Without			**RS301111J00R**	2
					15A		With			**RS30111AJ01K**	3
		A	10	10	1B		Without			**RS301111A01G**	4
		C								**RS301111C01L**	5
							With			**RS30111AC00V**	6
	45	B						1,300	1,300	**RS45111ABA02**	7
Dual-unit	30	C						600	2,400	**RS30112AC00J**	8
		J-1	5		3B					**RS30112AJA02**	9

Metal lever

Number of resistor elements	Travel (mm)	Lever types	Length of lever (L1) (mm)	Total resistance (k Ω)	Resistance taper	Detent	Mounting plate	Minimum order unit (pcs.) Japan	Minimum order unit (pcs.) Export	Products No.	Drawing No.
Single-unit	15	9-1	10	10	15A	Without	With	700	2,800	**RS15111A900B**	10
	20				1B					**RS20111A9A03**	11
	30							600	2,400	**RS30111A9012**	12
		4	15	20			Without	1,440	2,880	**RS3011114A02**	13
		6		10			With			**RS30111A602N**	14
	45	9-1	10					1,300	1,300	**RS45111A900F**	15
							Without			**RS4511119A04**	16
	60	6	15		15A		With	900	900	**RS6011YA600M**	17
		9-1	10		1B		Without			**RS6011Y19004**	18
		6	15							**RS6011Y1600Q**	19
Dual-unit	45	4	20					1,150	1,150	**RS451121400A**	20
							With			**RS45112A400G**	21
	60	6	15		15A			900	900	**RS60112A600N**	22
				20						**RS60112A600U**	

Note

Other varieties are also available. Refer to "Other Specifications" (P.392, 393).

Refer to P.392 for other specifications.
efer to P.393 for configuration details.
Refer to P.394 for ordering products not listed.
Refer to P.417 for soldering conditions.

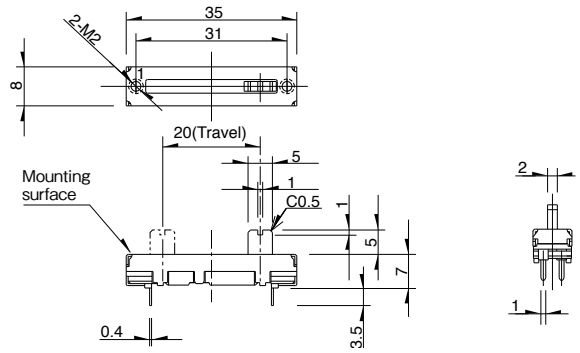

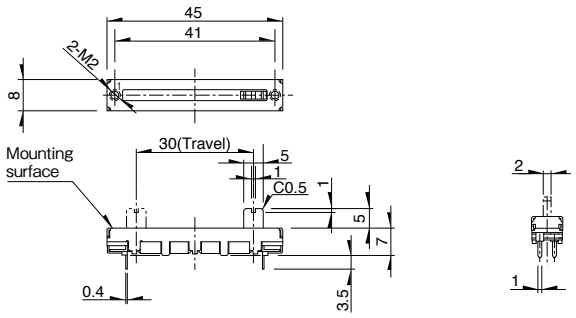

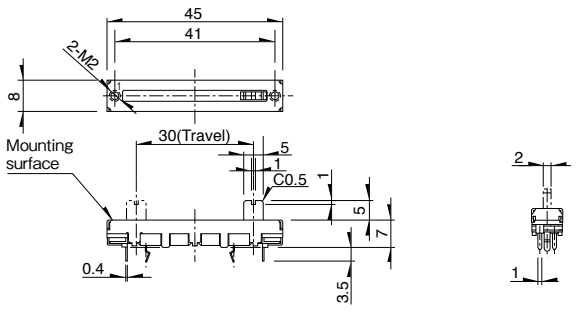
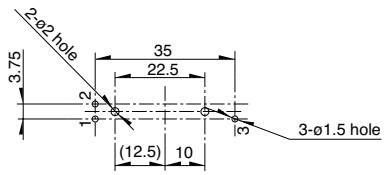
Packing Specifications

Tray

Product No.	Number of resister elements	Number of packages (pcs.)		Export package measurements (mm)
		1 case /Japan	1 case /export packing	
RS151 **RS201**	Single-unit	700	2,800	518×378×422
RS301	Single-unit/ Dual-unit	600	2,400	
RS3011114A02 **RS30111A602N**	Single-unit	1,440	2,880	518×378×530
RS451	Single-unit	1,300	1,300	529×373×273
	Dual-unit	1,150	1,150	
RS601	Single-unit/ Dual-unit	900	900	

Dimensions

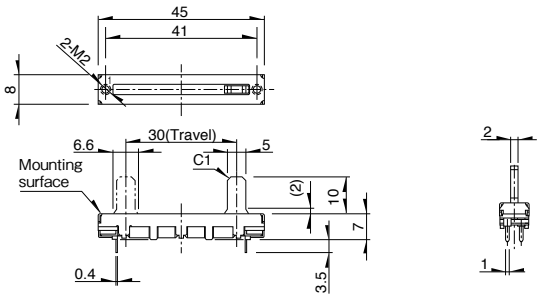

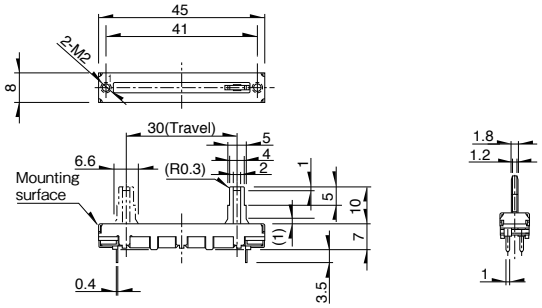

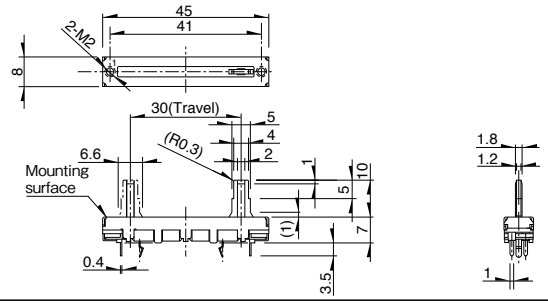

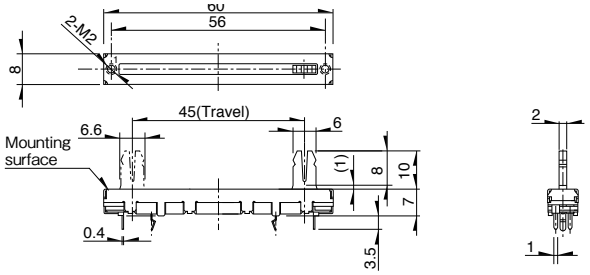
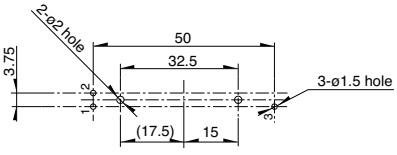
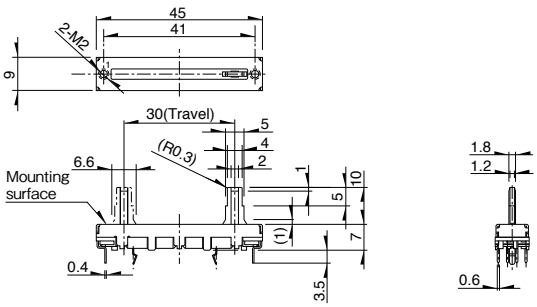
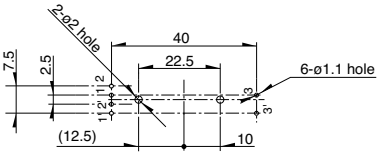
Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
1		
2		
3		

The length of Lever (L1) can be customized. Refer to P.393 for details.

Dimensions

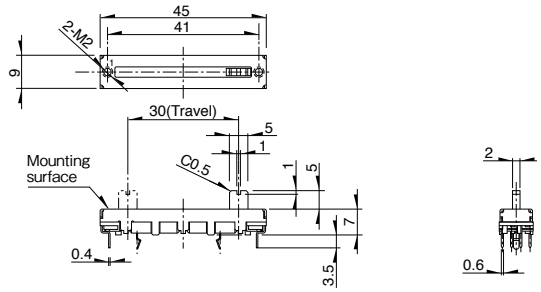
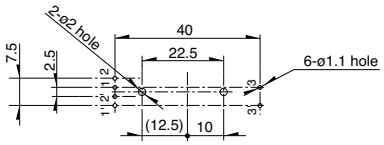
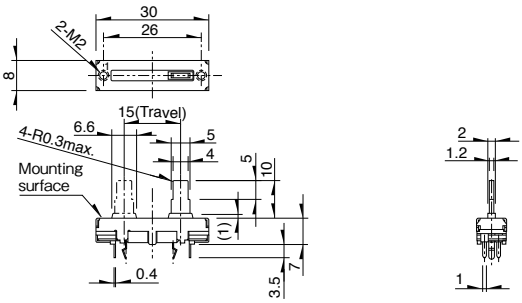

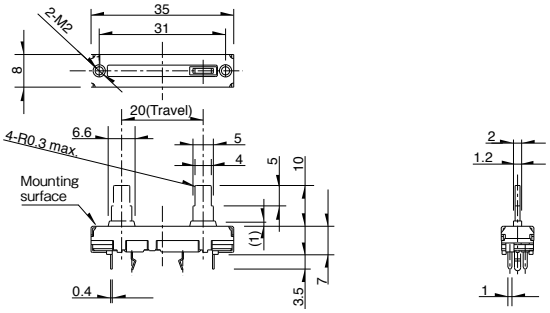
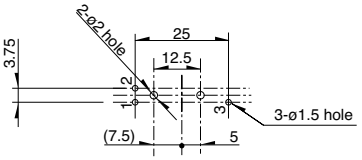
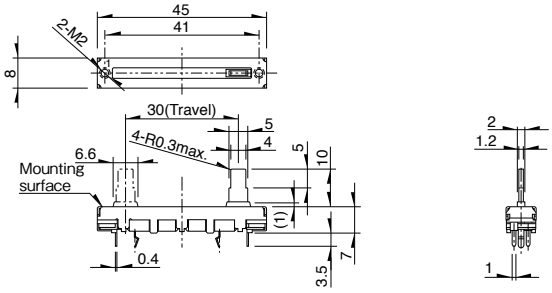
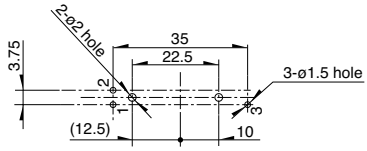
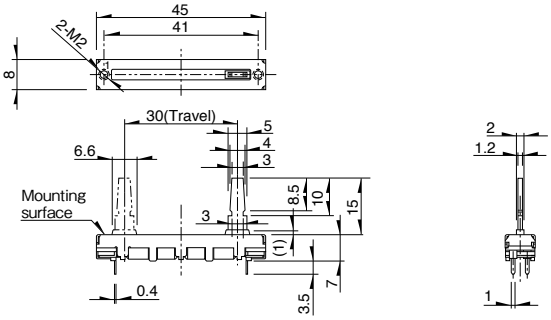

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
4		
5		
6		
7		
8		

The length of Lever (L_1) can be customized. Refer to P.393 for details.

Dimensions

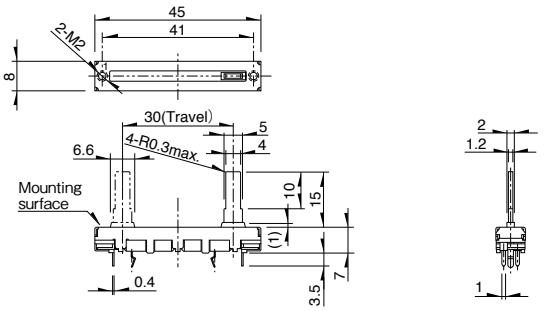
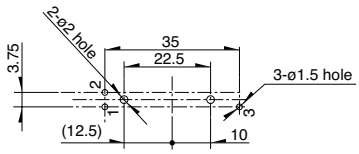
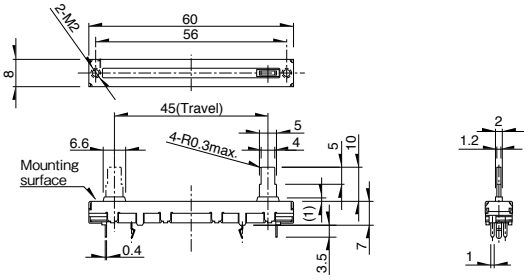
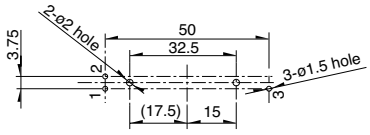
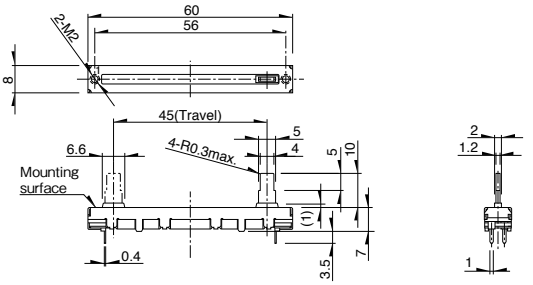

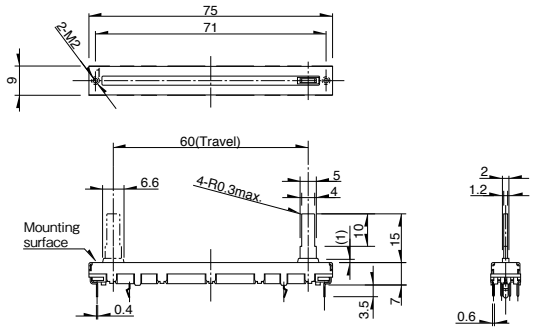
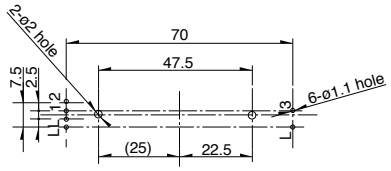
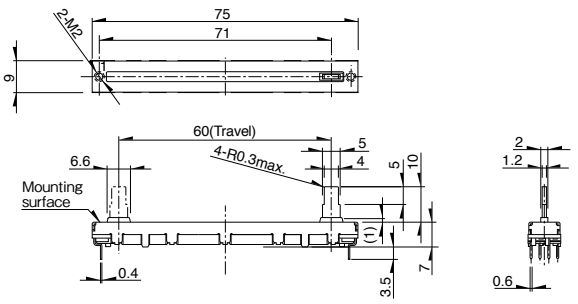

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
9		
10		
11		
12		
13		

The length of Lever (L1) can be customized. Refer to P.393 for details.

Dimensions

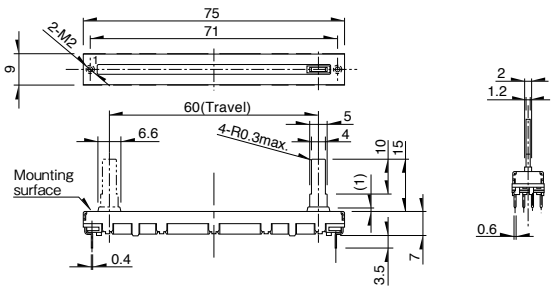

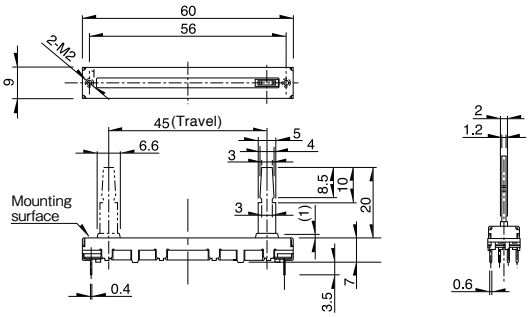

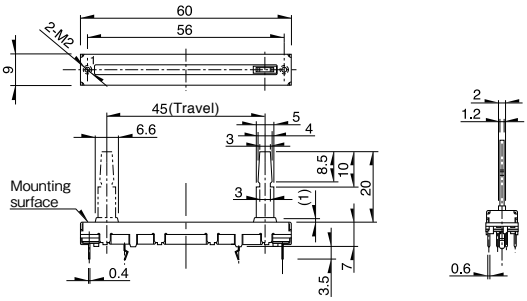
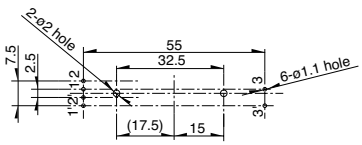
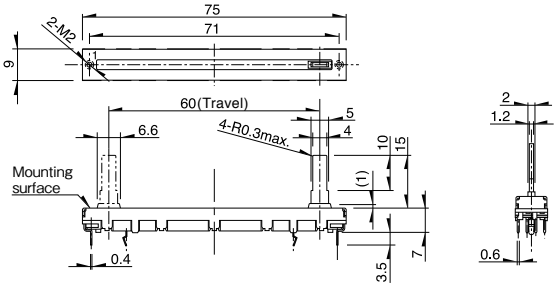
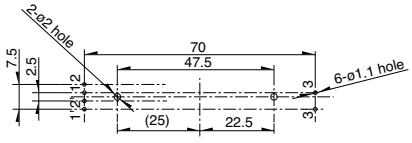
Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
14		
15		
16		
17		 L: Lug terminal
18		 L: Lug terminal

The length of Lever (L_1) can be customized. Refer to P.393 for details.

Dimensions

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from mounting side)
19		
20		
21		
22		

The length of Lever (L_1) can be customized. Refer to P.393 for details.

In addition to the products listed, we can accommodate the follow specifications.

Travel Distance Variety

Travel (mm)	15	20	30	45	60

Total Resistance Variety

Totalresistance (k Ω)	10	20	50	100	200

Resistance Taper

Resistance taper	1B	3B	4B	10A	15A

Note

DC (10V DC) is also available. (Tapped types are not available)

Rated Power


Travel	Single-unit		Dual-unit	
	1B	4B, 10A, 15A	1B, 3B	4B, 10A, 15A
15mm	0.05W	0.025W	0.025W	0.012W
20mm	0.1W	0.05W	0.05W	0.025W
30mm	0.2W	0.1W	0.1W	0.05W
45mm	0.25W	0.125W	0.125W	0.06W
60mm	0.2W	0.1W	0.2W	0.1W

Maximum Operating Voltage


Travel	Single-unit		Dual-unit	
	1B	4B, 10A, 15A	1B, 3B	4B, 10A, 15A
15mm	100V AC, 10V DC	50V AC, 10V DC	100V AC, 10V DC	50V AC, 10V DC
20mm	200V AC, 10V DC	150V AC, 10V DC		
30mm			200V AC, 10V DC	150V AC, 10V DC
45mm				
60mm				

Terminal Layout / Circuit Diagram (Viewed from Mounting Side)

Single-unit




Single-unit (with lug terminal) (RS6011Y only)



L : Lug terminal

Dual-unit



Note

Marked are specifications recommended by Alps Alpine.





Refer to P.394 for ordering products not listed.

In addition to the products listed, we can accommodate the follow specifications.




Lever Types

Unit:mm

Metal lever

Code	Dimensions	
9-2		t=1.2 L1: 5
9-1		t=1.2 L1: 10
6		t=1.2 L1: 15, 20
4		t=1.2 L1: 15, 20

Insulated lever

Code	Dimensions	
J-1		t=2 L1: 5
A		t=2 L1: 10, 15
C		L1: 10, 15


Corresponding Specifications

Dust cover	Available
Tap	Available (Only the center-positioned)

Unit:mm

Insulated lever configuration

B



t=2

L1
10
15

Note

Marked are specifications recommended by Alps Alpine.