

CODE

COMMENTARY

pipe or attachments with shear lugs where the top of plate is located below the concrete surface, can be used provided adequate strength and load transfer can be demonstrated by analysis or tests.

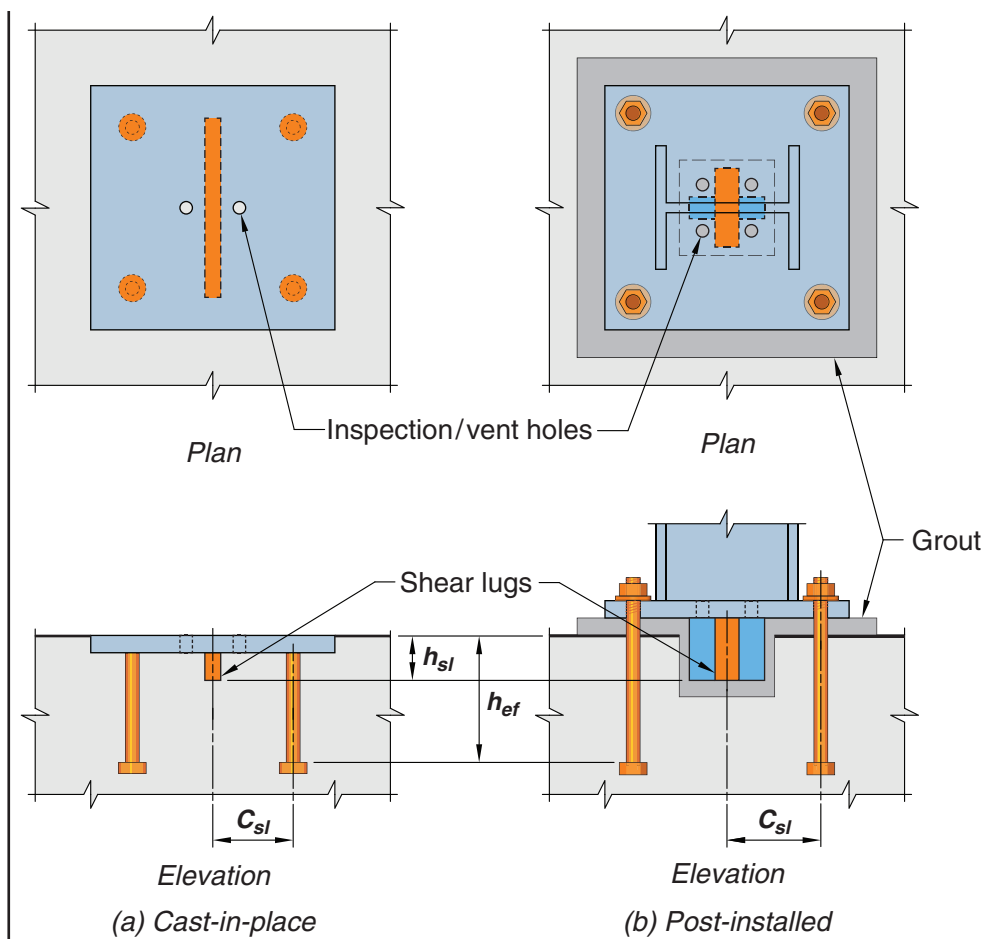


Fig. R17.11.1a—Examples of attachments with shear lugs.