




6.0m MAINTENANCE ACCESS GATE

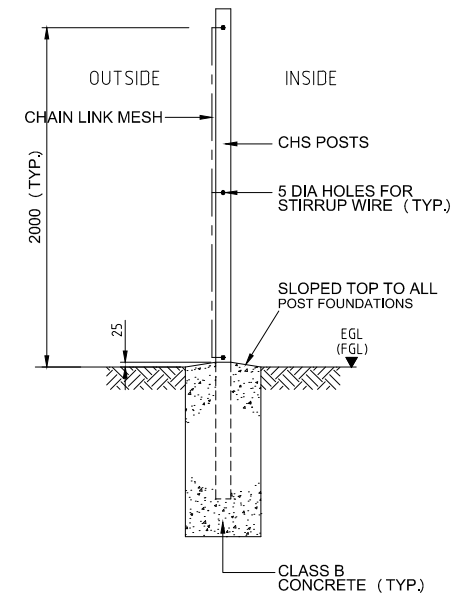

TYPICAL SECTION

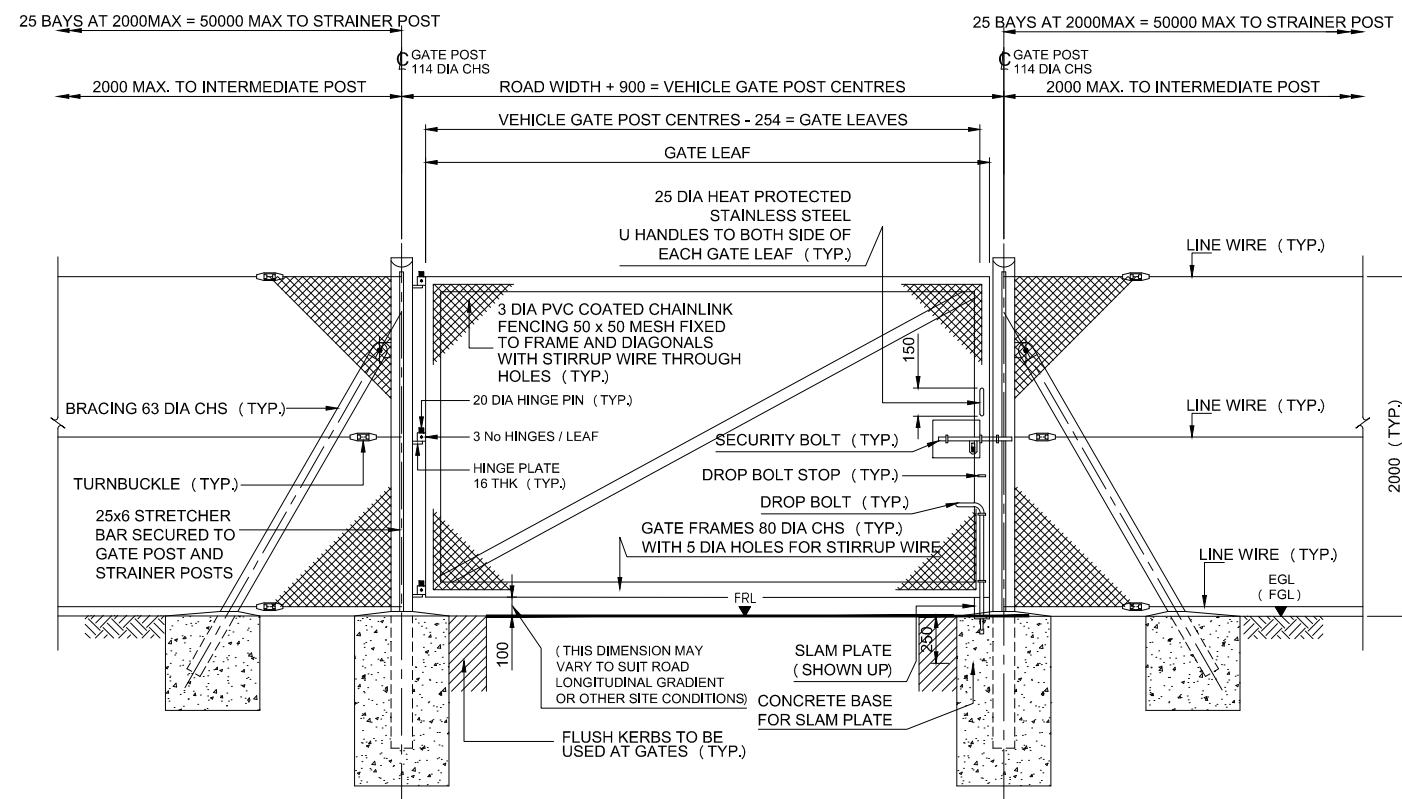

3.0m MAINTENANCE ACCESS GATE

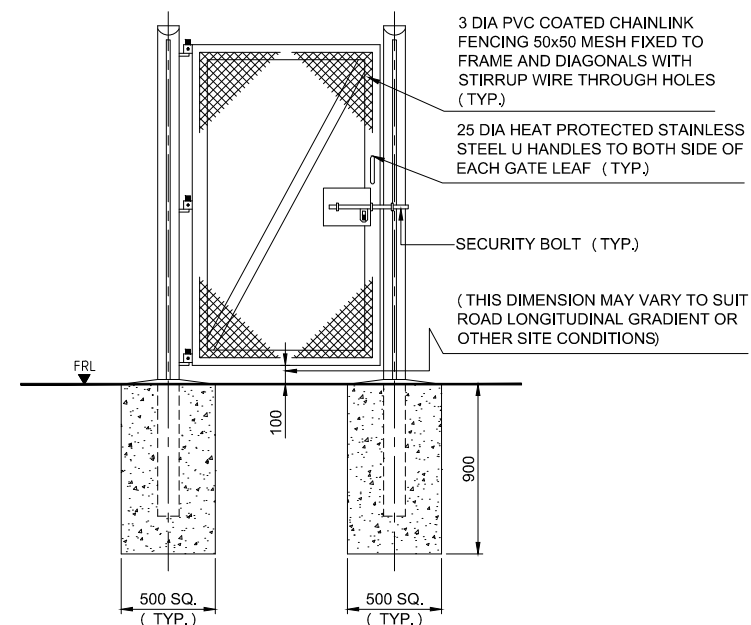


PEDESTRIAN GATE

NOTES:

THESE DETAILS REPRESENT A MINIMUM REQUIREMENT AND MAY BE VARIED, SUBJECT TO APPROVAL, TO SUIT PROJECT REQUIREMENTS. THEY ARE EXPECTED TO BE INCORPORATED AS TYPICAL DETAILS WHICH SHALL BE CHECKED AND APPROVED AS PART OF THE PROJECT DRAWING SET.

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE STATED.
2. STRAINER POSTS TO BE PROVIDED AT CHANGES OF DIRECTION AND AT ACUTE VARIATIONS OF LEVEL.
3. ALL GALVANISED POSTS, EXTENSION ARMS, FRAMING AND BRACING MEMBERS SHALL BE POWDER COATED (PHOSPHATE COAT) .
4. GATE FRAMES AND DIAGONAL BRACING TO BE DRILLED THROUGH AT N.M.T. 450 CENTRES FOR ATTACHING MESH WITH 2.3/3.2 DIA STIRRUP WIRE

LEGEND



EGL - EXISTING GROUND LEVEL
FGL - FINISHED GROUND LEVEL
FRL - FINISHED ROAD LEVEL
CHS - CIRCULAR HOLLOW SECTION
RHS - RECTANGULAR HOLLOW SECTION
PVC - POLYVINYL CHLORIDE
DIA - DIAMETER
TYP - TYPICAL

REFERENCE DRAWINGS AND DOCUMENTS

No.	REVISIONS	APP'D	DATE
-----	-----------	-------	------

CLIENT

TITLE
STANDARD DRAWINGS
STORM WATER WORKS

DRAWING TITLE

STANDARD DRAWING FENCING AND SECURITY WORKS GATE FOR SITE
FENCING DETAIL (SHEET 1 OF 2)

DRAWN	-	SCALE	1 : 40
CHECKED	-	DATE	-
APPROVED	-	SIZE	A1
PROJECT No.	-	DWG. No.	519