

### 6.2.2 Roundabouts

In general, gravity pipelines and those other utilities installed under or close to the Median are permitted to cross through a roundabout.

In order to limit the number of utilities crossing roundabouts/large junctions, multiple gravity pipelines for a given utility should be combined prior to the crossing, where feasible.

Placing utility corridors within circulating lanes should be avoided.

Figure 6.4 illustrates an example of utility corridors arrangement at a Street/Avenue roundabout.

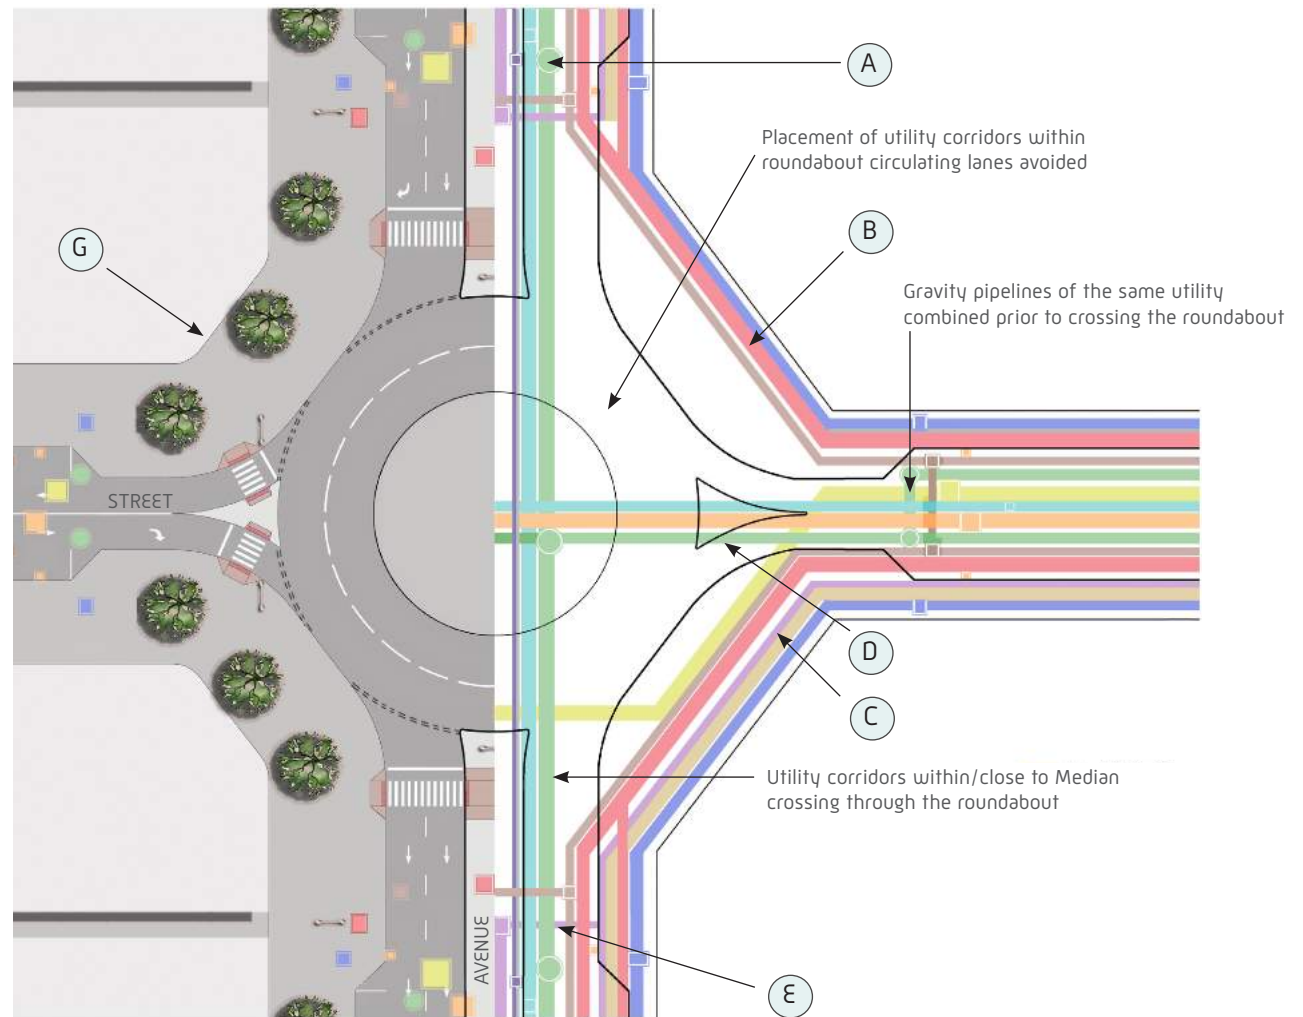


Figure 6.4. Example of utility corridors arrangements at a Street/Avenue roundabout