

The following diagram illustrates the general progression of a storm water and sub-soil drainage project, for which the detail is given in Section 8.

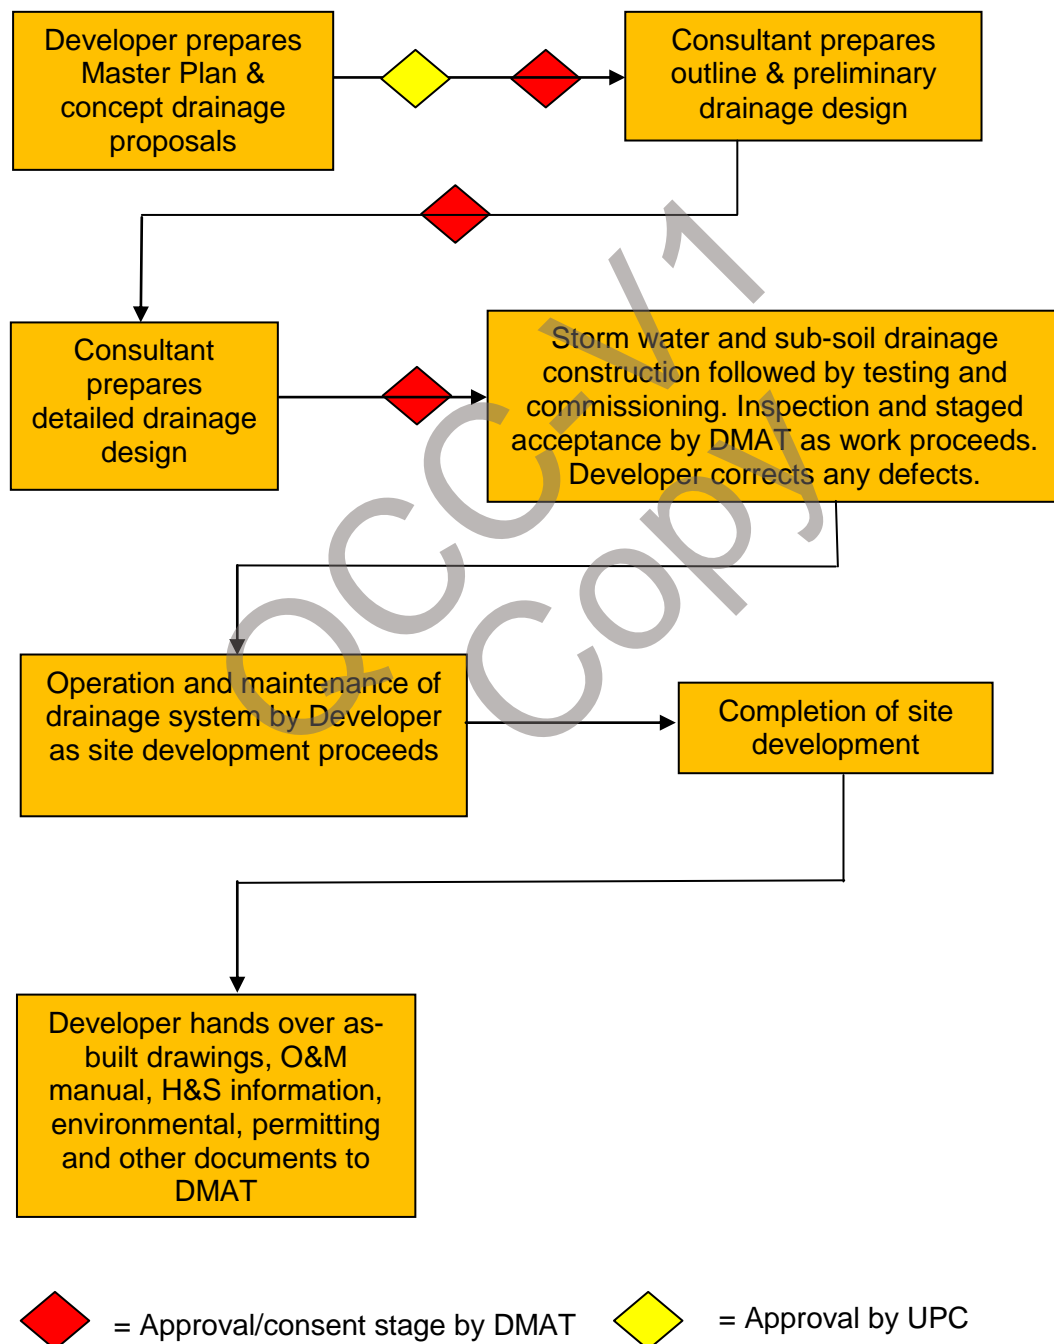


Figure 1-1 - DMAT and Developer-Led Drainage Project Stages

1.3. Permanent Works

This Manual applies only to the design of the 'permanent works'. This includes the design of any interim measures, such as temporary storage, which may be required until a long term solution is available. The design of all temporary works required for the construction of the permanent and interim works shall be the responsibility of the Consultant who shall ensure that any such works do not adversely impact on the permanent works.