

Figure 49- Door lever handle details

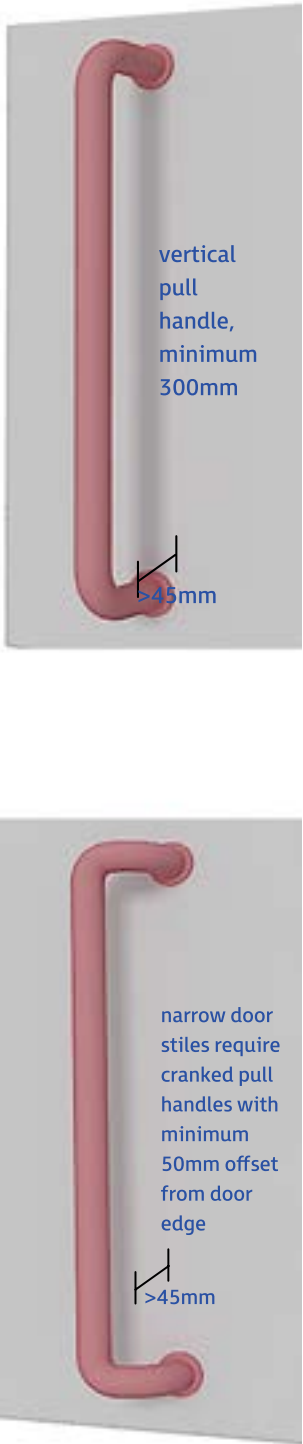


Figure 50 - Pull handles

# 7.4 SEATING

THIS SECTION DEALS WITH THE PROVISION, LAYOUT AND DESIGN OF INTERNAL AND EXTERNAL SEATING.

## PERFORMANCE OBJECTIVE

Adequate and appropriately designed forms of seating (to suite the function of the spaces in which they are located and the needs of the users) shall be provided for amenity purposes and to provide places to rest.

## 7.4.1 MANDATORY PROVISIONS

The design and layout of seating will satisfy the performance objectives if:

1. Seats are provided at intervals along internal and external routes and where waiting is likely.
2. Seating is located on level ground or floor surface, set back a minimum of 500mm from pedestrian routes (so as to maintain required circulation width) and provided with a direct and unobstructed approach.
3. A clear space of 1500mm x 1500mm is provided at the side of fixed seating. See figure 1.

4. Where rows of fixed seating are provided adequate space is provided for vulnerable users in accordance with Figure 51.
5. Seating contrasts visually with the surrounding surfaces.
6. A range of seating types, sizes and heights is provided to suite the function of the space and / or building and the needs of a wide variety of users.
7. Seats are not mounted on a plinth.
8. Seating in external areas is provided at a range of heights from 380mm to 580mm.

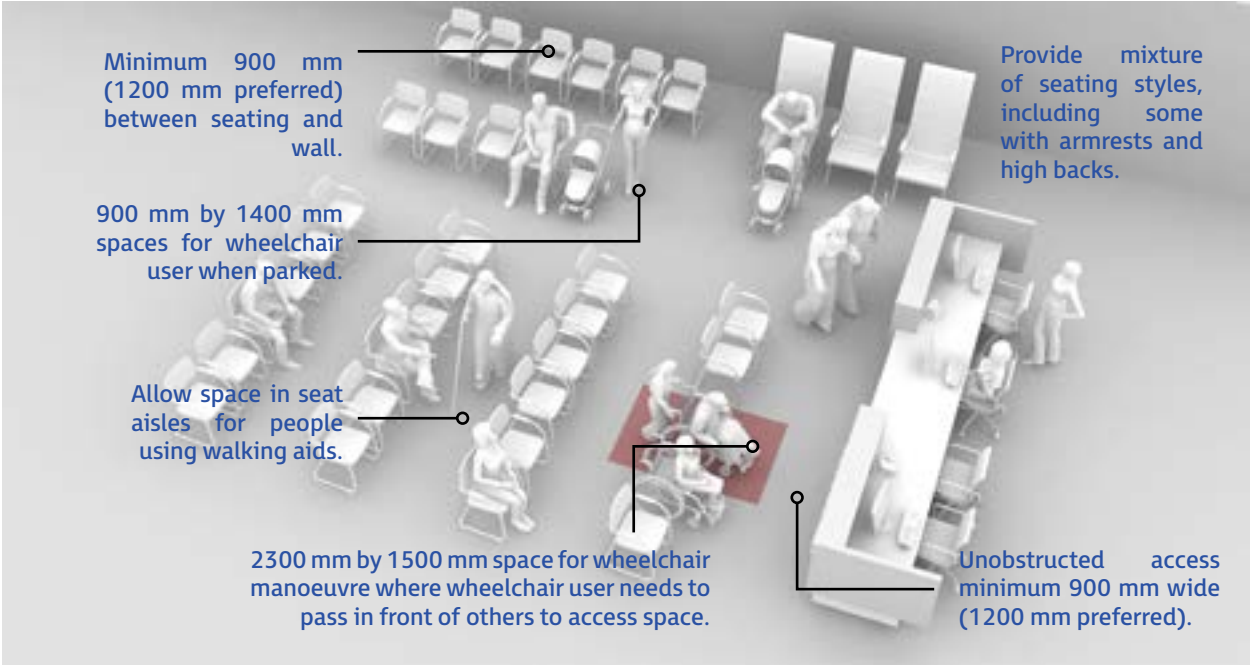


Figure 51 - Seating