


TYPICAL PLAN VIEW
BOX SOAKAWAY

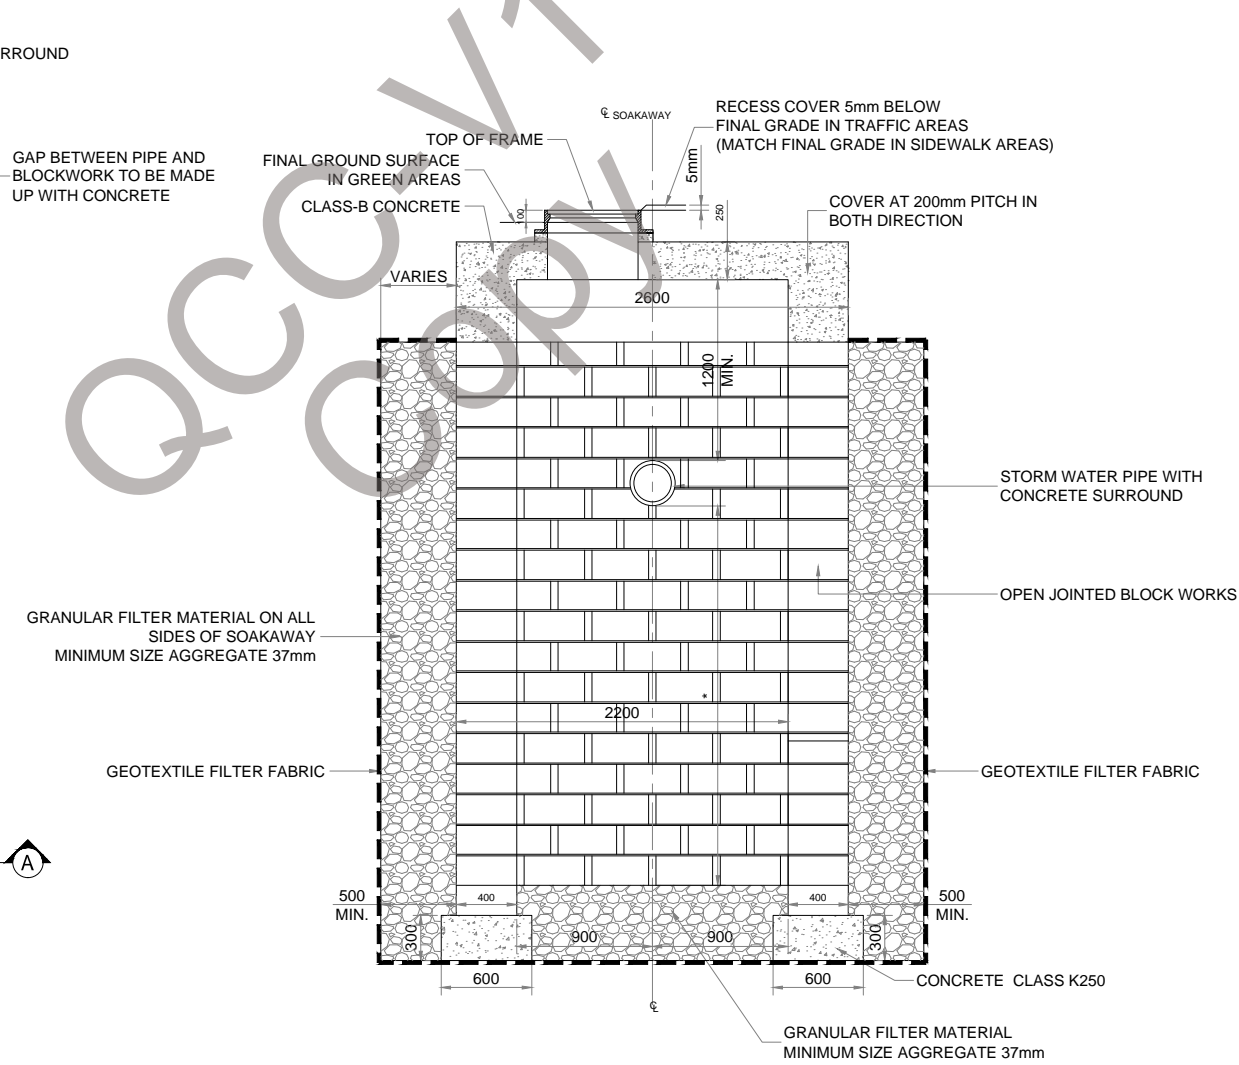

SECTION A-A

- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS INDICATED OTHERWISE.
 2. IF THERE IS DISCREPANCY BETWEEN THE REQUIREMENTS IN THE SPECIFICATIONS AND THOSE SHOWN ON THIS DRAWING, THE SPECIFICATIONS SHALL BE FOLLOWED.
 3. ALL MATERIALS, FABRICATION AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS AND VERIFIED BY THE ENGINEER.
 4. WHERE POSSIBLE GULLY CONNECTION TO BE DIRECT TO CATCH PITS.
 5. MAXIMUM DEPTH OF SOAKAWAY SHOULD BE 0.5m MINIMUM ABOVE THE GROUND WATER TABLE.
 6. THE NUMBER OF SOAKAWAYS SHALL BE DETERMINED BASED ON THE DESIGN FLOW AND SOIL CHARACTERISTICS.

REFERENCE DRAWINGS AND DOCUMENTS			
No.	REVISIONS	APP'D	DATE
CLIENT			
TITLE			
STANDARD DRAWINGS MAIN ROADS			
DRAWING TITLE			
SURFACE DRAINAGE TYPICAL BOX TYPE SOAKAWAY STANDARD DETAILS			
DRAWN	-	SCALE	N.T.S
CHECKED	-	DATE	-
APPROVED	-	SIZE	A1
PROJECT No.	-	DWG. No.	N-252