




TYPICAL GULLY CONNECTION UNDER PARKING AREAS

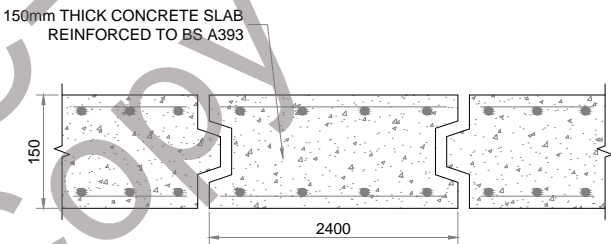

MESH REINFORCEMENT
DETAIL "A"

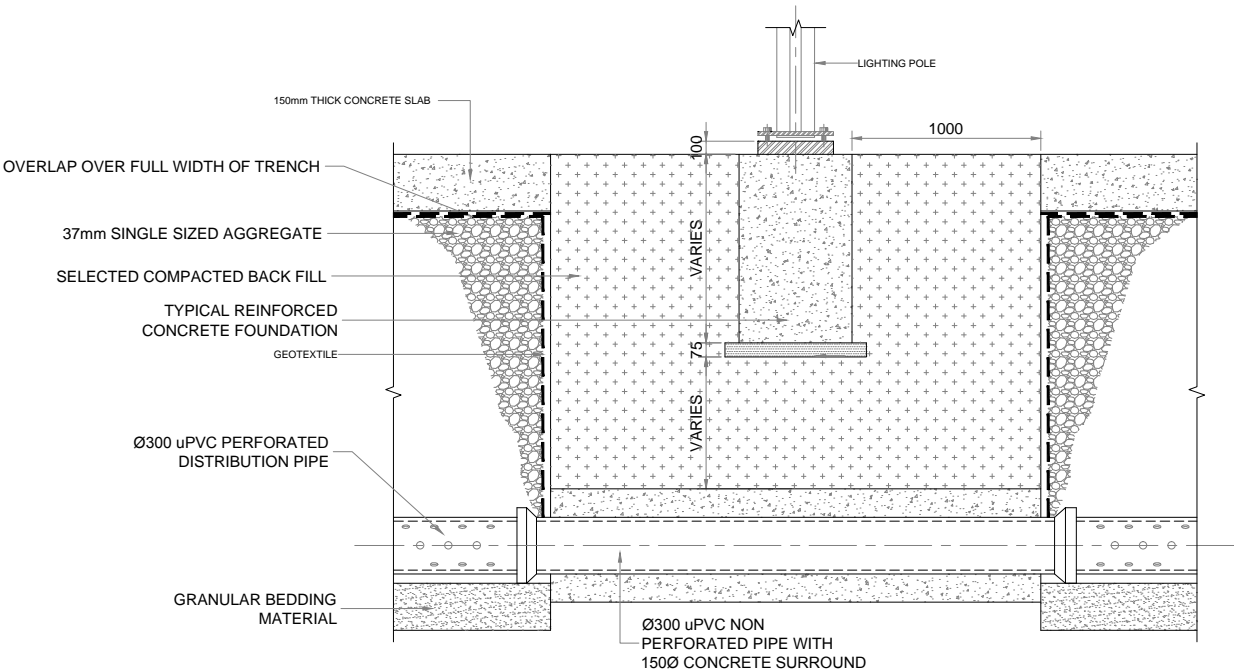

TYPICAL DETAIL OF SOAKAWAY UNDER LIGHTING COLUMN

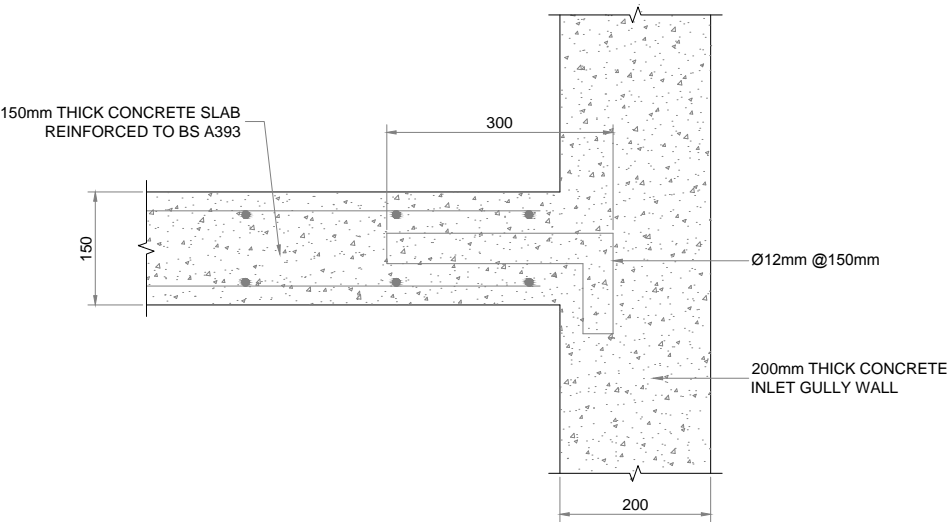

ANCHORAGE DETAIL
DETAIL "B"

- NOTES:
- ALL DIMENSIONS ARE IN MILLIMETERS UNLESS INDICATED OTHERWISE.
 - IF THERE IS DISCREPANCY BETWEEN THE REQUIREMENTS IN THE SPECIFICATIONS AND THOSE SHOWN ON THIS DRAWING, THE SPECIFICATIONS SHALL BE FOLLOWED.
 - ALL MATERIALS, FABRICATION AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS AND VERIFIED BY THE ENGINEER.
 - WHERE GULLY/CATCH PIT CONNECTION RUNS UNDER CARRIAGEWAY, GRANULAR BED AND SURROUND TO BE REPLACED BY 150 CONCRETE SURROUND (GRADE C20).
 - WHERE POSSIBLE GULLY CONNECTION TO BE DIRECT TO CATCH PITS.
 - THE SHOWN REINFORCEMENT IS FOR GUIDANCE ONLY AND REINFORCEMENT FOR SPECIFIC PROJECT IS TO BE DESIGNED ACCORDING TO SITE CONDITIONS AND SHOWN ON SHOP DRAWINGS SUBJECT TO THE APPROVAL OF THE ENGINEER.

REFERENCE DRAWINGS AND DOCUMENTS

No.	REVISIONS	APP'D	DATE
-----	-----------	-------	------

CLIENT

TITLE
STANDARD DRAWINGS
MAIN ROADS

DRAWING TITLE
SURFACE DRAINAGE TYPICAL
TRENCH SOAKAWAY STANDARD
DETAILS (SHEET 3 OF 3)

DRAWN	-	SCALE	N.T.S
CHECKED	-	DATE	-
APPROVED	-	SIZE	A1
PROJECT No.	-	DWG. No.	N-256