POWERED DESCENT

a procedures section with a sequence timeline, crew checklists, change bars, cream paper for the screen

6.3.1 SEQUENCE.

Powered descent runs from ignition to touchdown in three phases: braking, approach and landing. Ignition time, throttle points and gate times below are for this fictional vehicle only.

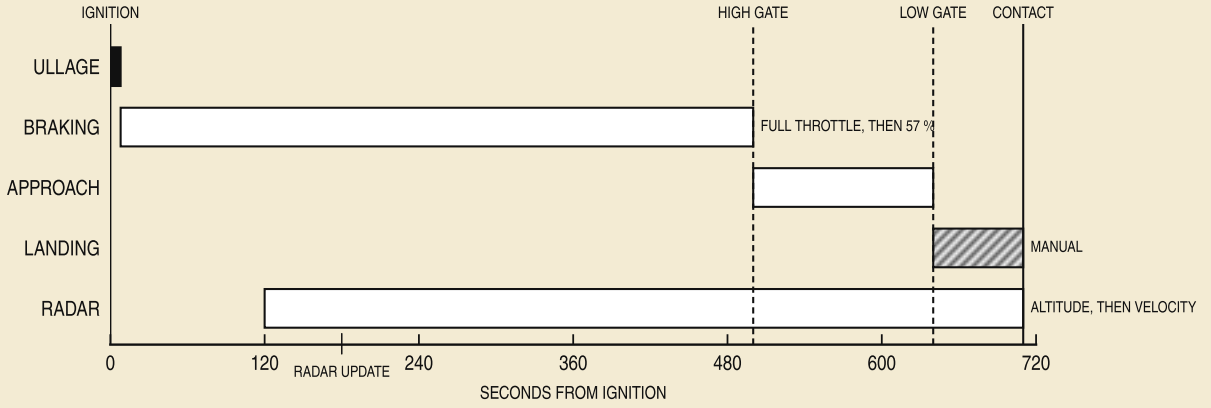


Figure 6.3-1. Powered Descent Sequence of Events

6.3.2 PROCEDURES.

BEFORE IGNITION	CDR
GUID CONT	PGNS
ENG ARM	DES
THROTTLE	MIN
ULLAGE	ON, 7 SEC
PROCEED	ENTER

AT HIGH GATE	LMP
RADAR ALT	CROSSCHECK
FUEL	CALL OUT
PROGRAM	64
WINDOW	DESIGNATE

6.3.2.1 Low gate.

At low gate the crew may take manual control of attitude and rate of descent. The program accepts rate inputs in one-metre-per-second steps until contact.

WARNING

If the descent-quantity light comes on, a land-or-abort call is due in 60 seconds.

6.3.3 TRAJECTORY.

The descent rides a transfer ellipse down from the parking orbit; figure 6.3-2 is drawn with `handbook.svg()`, the helper for figures that need more than the built-in blocks (see examples/custom-figure).

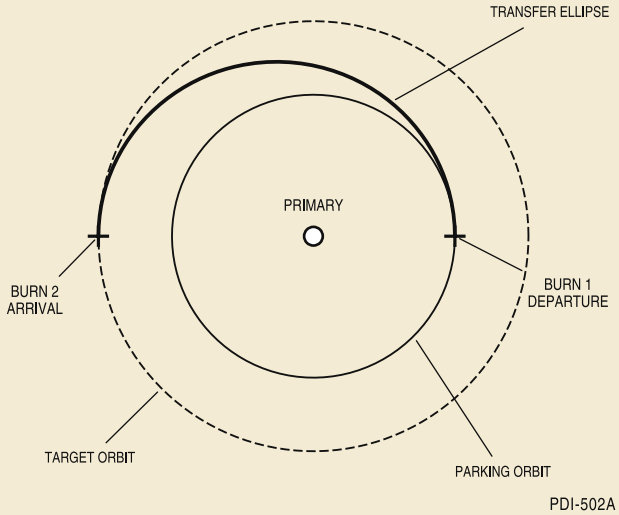


Figure 6.3-2. Transfer from Parking Orbit, after Hohmann