
设备名称：硅探测器 1133-01

1. 设备图片：

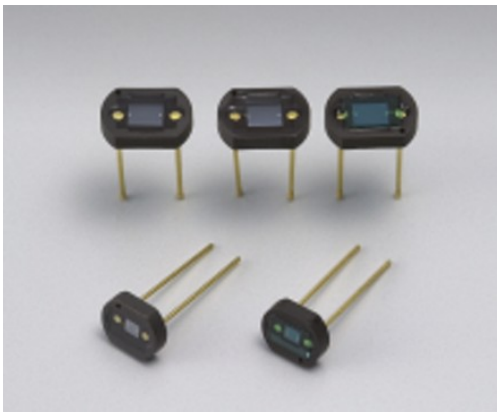

2. 存放地点：光电楼 109

3. 关键性能参数（文字或者图片快照）：

硅探测器，320 - 1100 nm，上升时间 2.5 μs，6.6 mm^2

4. 购买链接：

【淘宝】7 天无理由退货 https://e.tb.cn/h.Reqi92DeSQSHMqC?tk=3Ev65v1XScy

CZ001 「S1133-01 硅光电池 硅光电二极管 波长 960nm 现货日本滨松

HAMAMATSU」点击链接直接打开 或者 淘宝搜索直接打开

5. 驱动与控制软件、参数手册（包括 PDF 附件）：

简要说明（或者截图）即可，其余手册发送 PDF 附件给我。

■ General ratings / Absolute maximum ratings

Type No.	Dimensional outline/ Window material *	Active area size (mm)	Effective active area (mm^2)	Absolute maximum ratings		
				Reverse voltage V_R Max. (V)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
S1087	①/V	1.3 × 1.3	1.6	10	-10 to +60	-20 to +70
S1087-01	②/R					
S1133	③/V	2.4 × 2.8	6.6			
S1133-01	④/R					
S1133-14						

* Window material R: resin coating, V: visual-compensation filter

■ Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)


Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λp (nm)	Photo sensitivity S (A/W) λp	Photo sensitivity S (A/W) GaP LED 560 nm	Photo sensitivity S (A/W) He-Ne laser 633 nm	Infrared sensitivity ratio (%)	Short circuit current Isc 100 lx (μA)	Temp. coefficient of Isc (%/°C)	Dark current I_D V_R=1 V Max. (pA)	Temp. coefficient of I_D T_{CID} (times/°C)	Rise time tr V_R=0 V R_L=1 kΩ (μs)	Terminal capacitance Ct V_R=0 V f=10 kHz (pF)	Shunt resistance Rsh V_R=10 mV Min. (GΩ)	Shunt resistance Rsh V_R=10 mV Typ. (GΩ)
S1087	320 to 730	560	0.3	0.3	0.19	10	0.16	-0.01	10	1.12	0.5	200	10	250
S1087-01	320 to 1100	960	0.58	0.33	0.38	-	1.3	0.1						
S1133	320 to 730	560	0.3	0.3	0.19	10	0.65	-0.01			2.5	700		100
S1133-01	320 to 1100	960	0.58	0.33	0.38	-	5.6	0.1						
S1133-14	320 to 1000	720	0.4		0.37	-	3.4		20		0.5	200		50

SOLID STATE DIVISION

HAMAMATSU

Si photodiode S1087/S1133 series

■ Spectral response

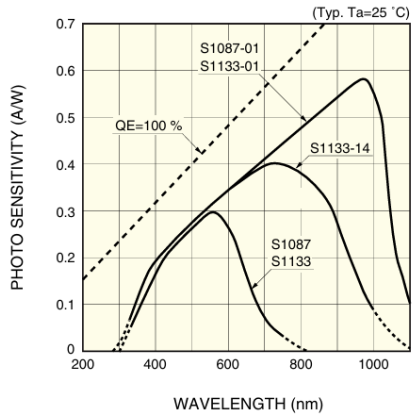

■ Photo sensitivity temperature characteristic (typical example: S1087)

