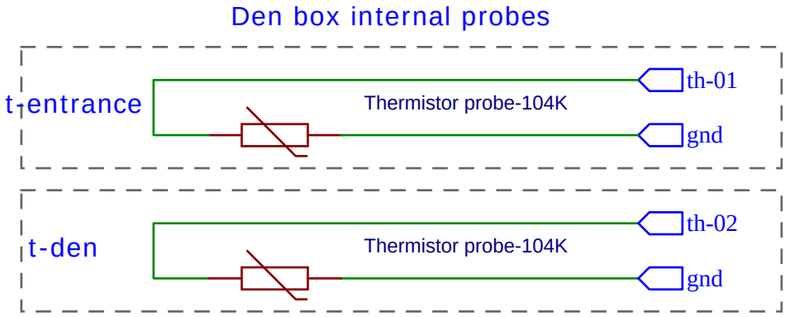


Logging:

Every x-seconds wake from power save and measure:

Entrance probe temperature t-ent degC

Den probe difference: den-delta = (t-den MINUS t-ent)

Save values in RAM


IF t-ent is stable or falling and den-delta POSITIVE

Retain data in RAM to store during EEPROM write cycle

EEPROM Write:

Every y-minutes if den-delta positive store values in EEPROM

Every z-minutes store external and internal temperatures in EEPROM

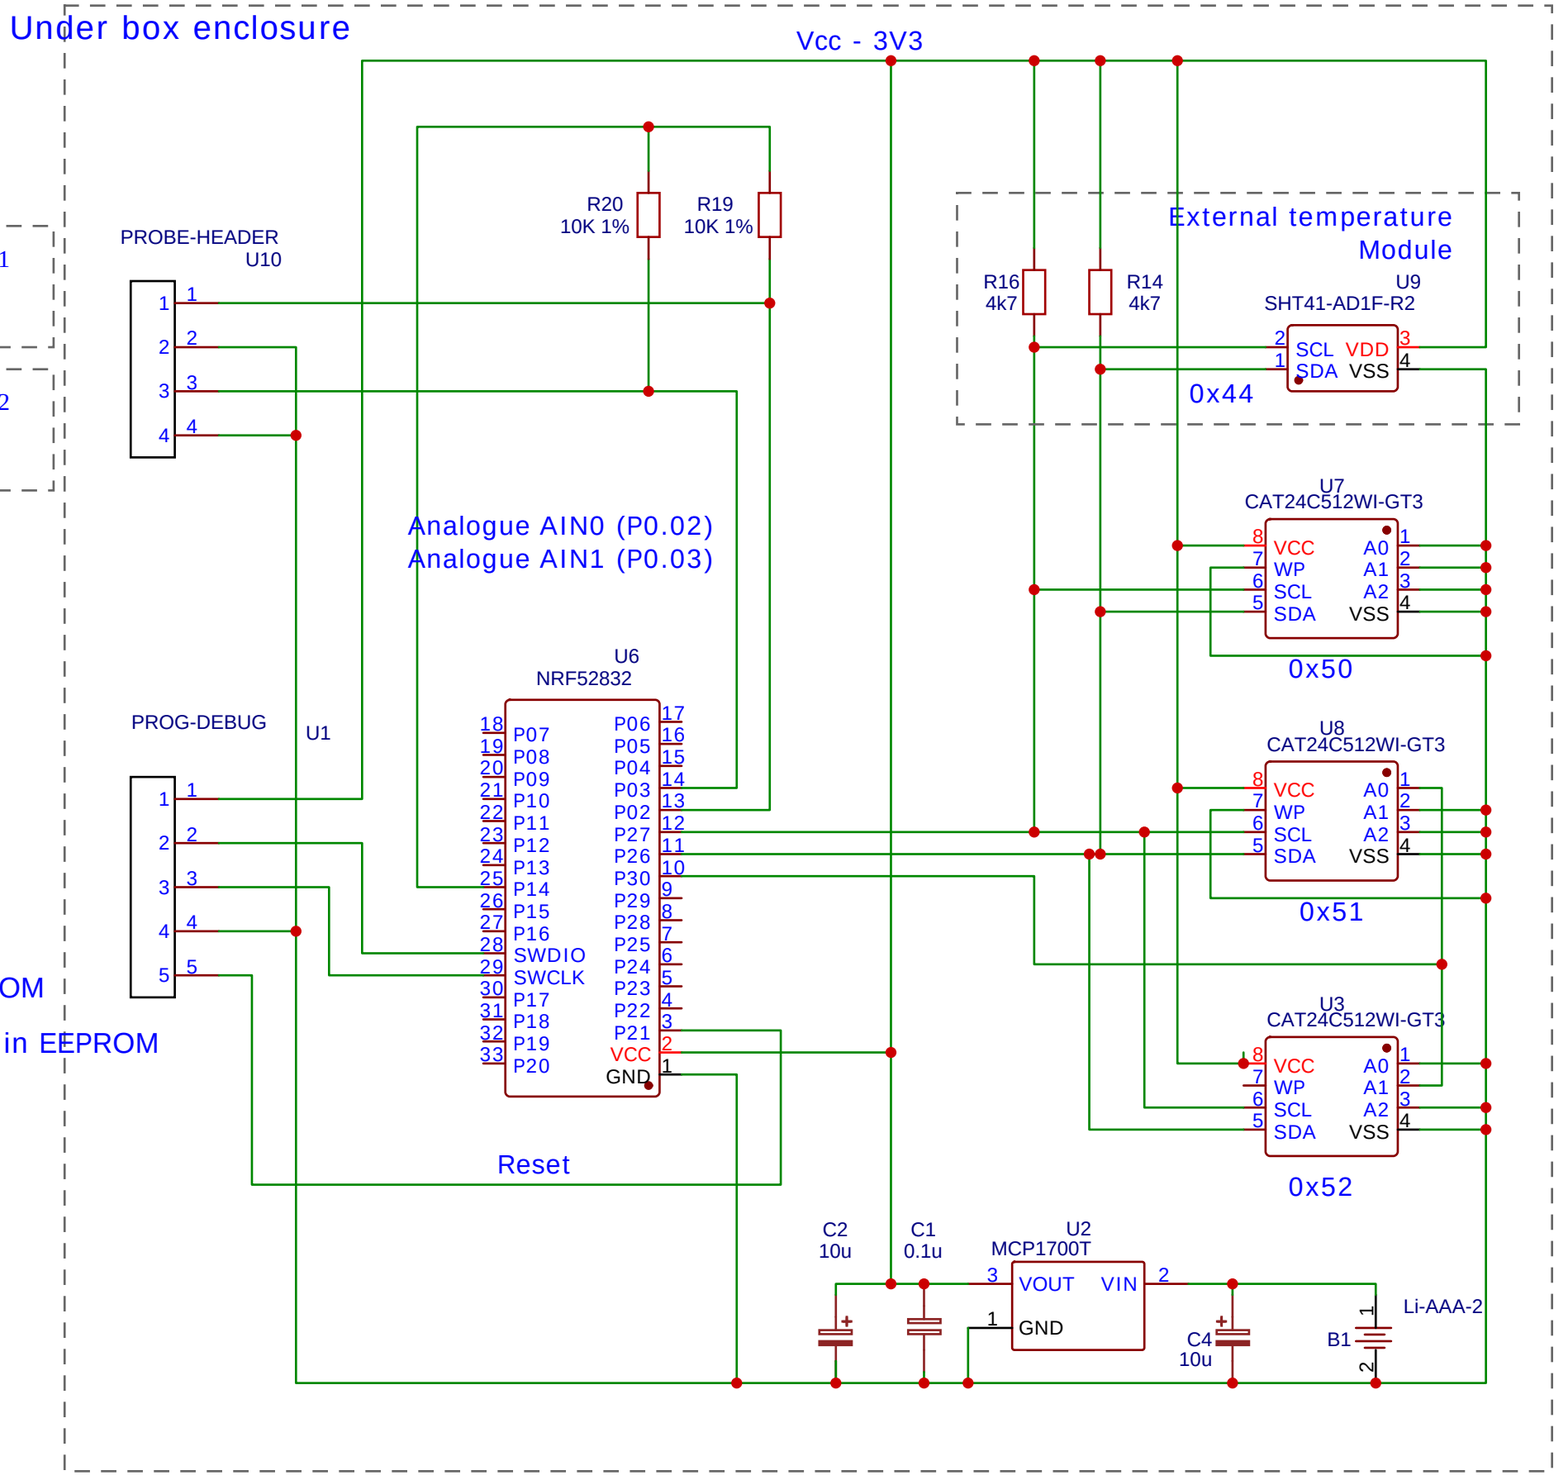

TITLE: Den Box Logger		REV: 1.1
EasyEDA	Company: Den-Box-Logger	Sheet: 1/3
	Date: 2026-10-21 Drawn By: Aidan Hedley	