
Under box enclosure

Vcc - 3V3

Den box internal probes

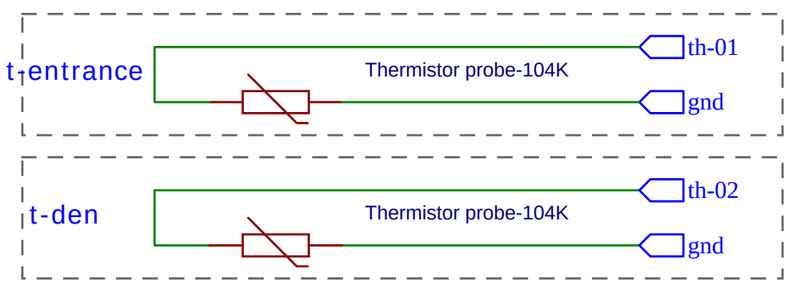

Logging:

Every x-seconds wake from power save and measure:


Entrance probe temperature t-ent degC

Den probe difference: den-delta = (t-den MINUS t-ent)

Save values in RAM

IF t-ent is stable or falling and den-delta POSITIVE

Retain data in RAM to store during EEPROM write cycle

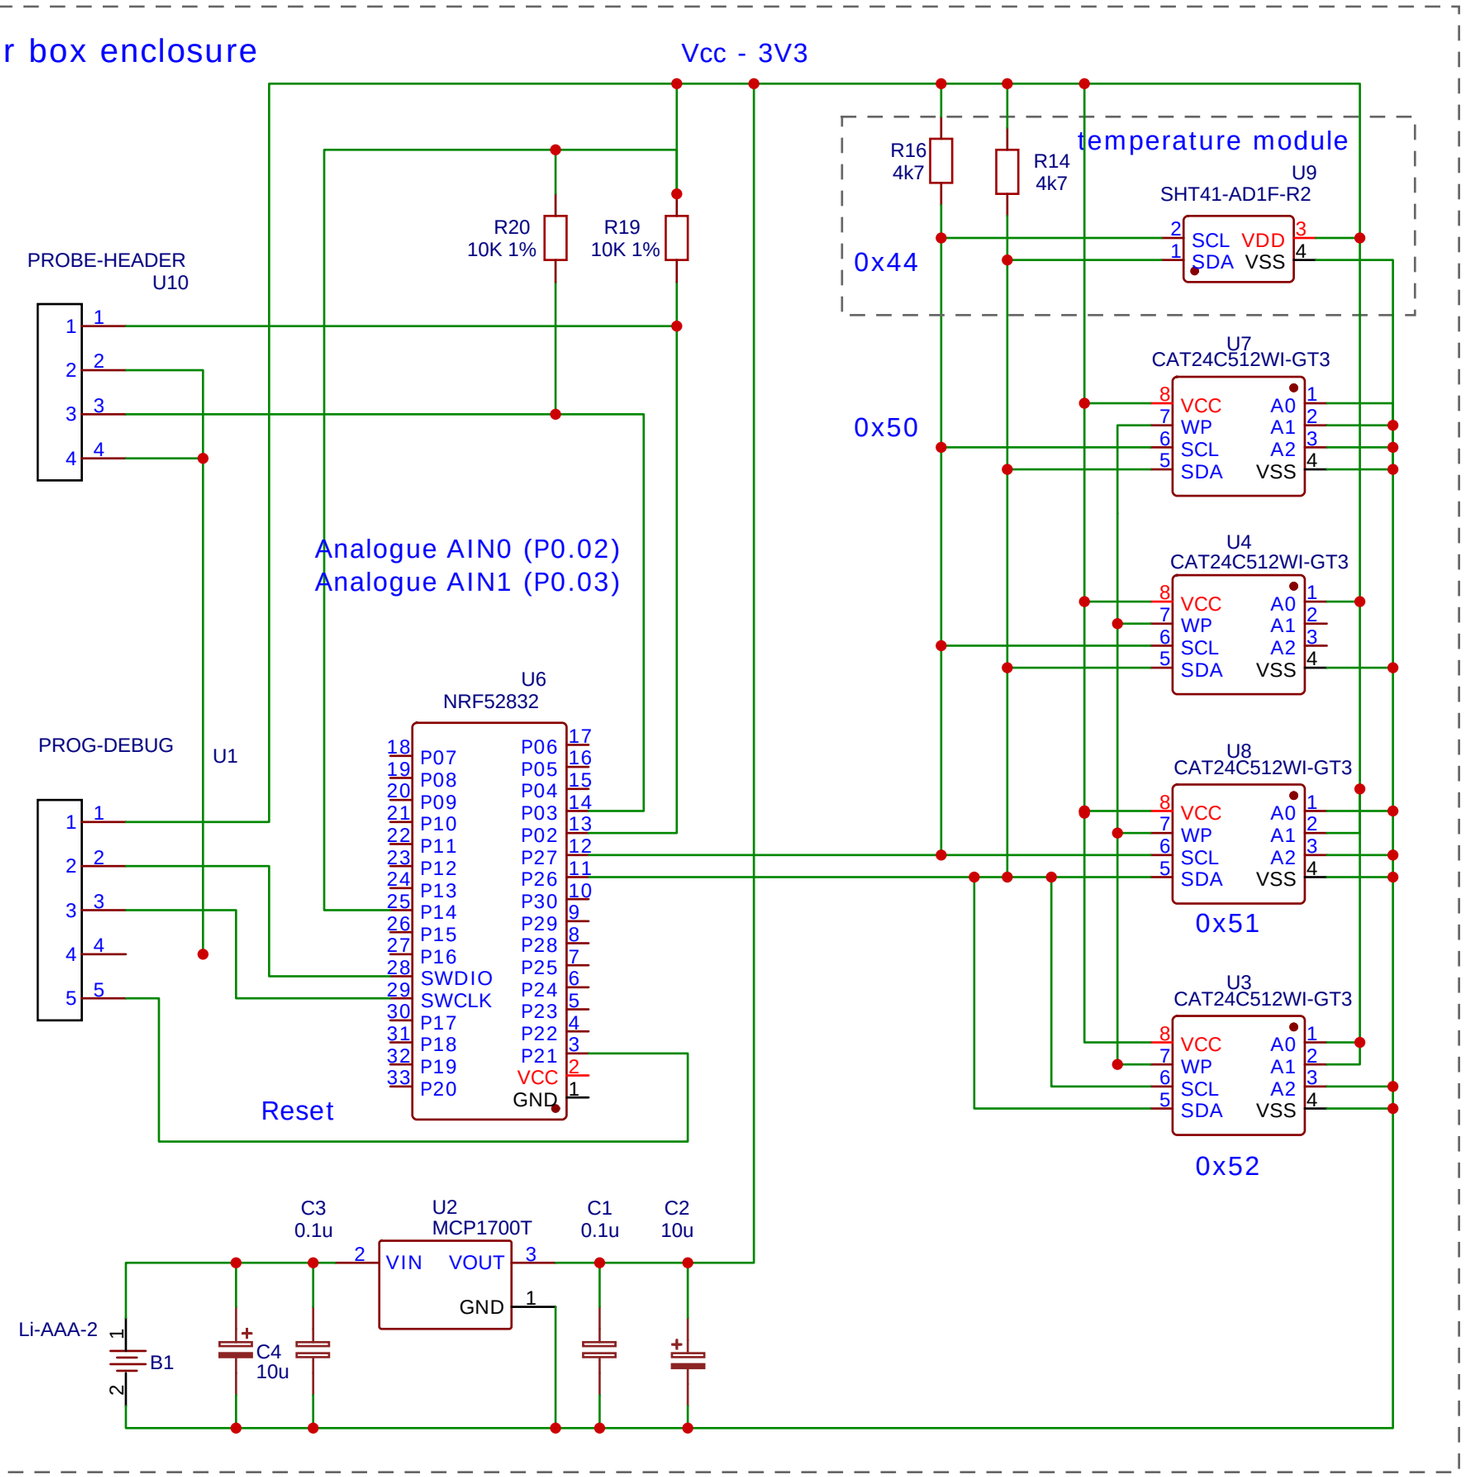

TITLE: Den Box Logger		REV: 1.1
EasyEDA	Company: Den-Box-Logger	Sheet: 1/3
	Date: 2026-10-21 Drawn By: Aidan Hedley	