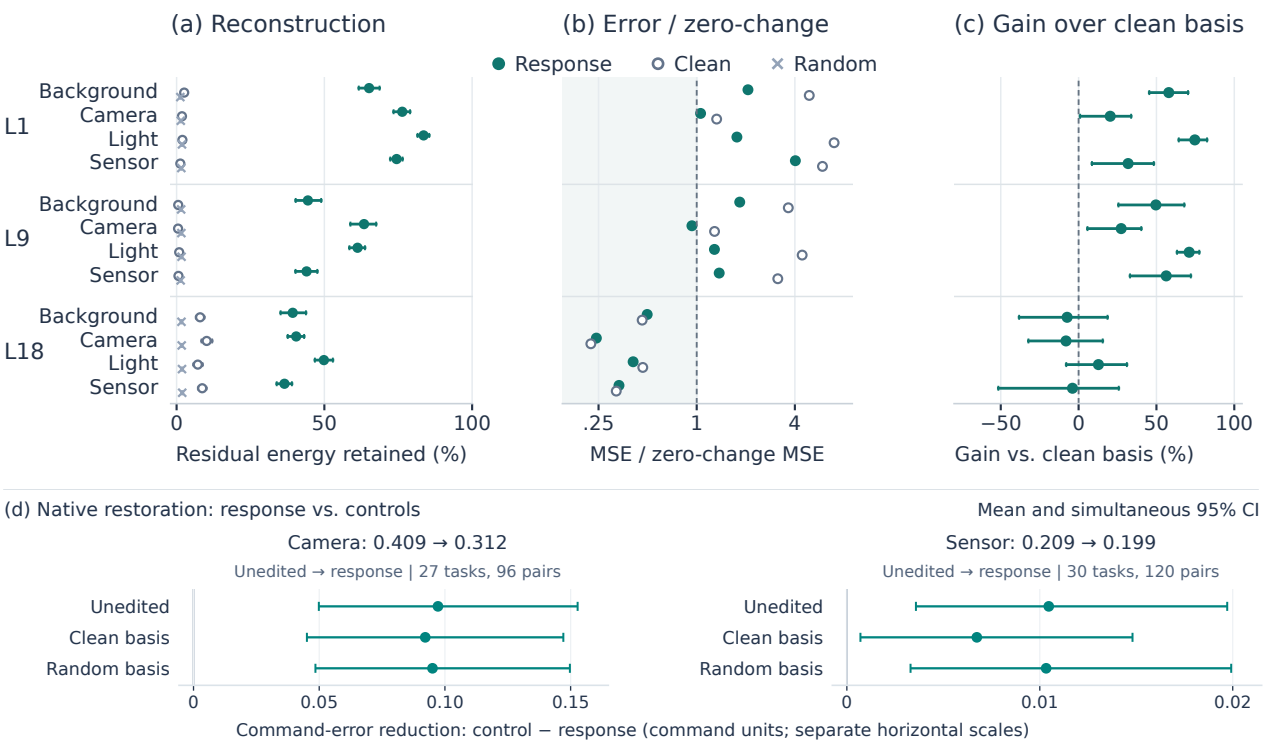

(a) Reconstruction
(b) Error / zero-change
(c) Gain over clean basis
Response
Clean
Random
L1
L9
L18
Background
Camera
Light
Sensor
0
50
100
.25
1
4
−50
0
50
100
Residual energy retained (%)
MSE / zero-change MSE
Gain vs. clean basis (%)
(d) Native restoration: response vs. controls
Mean and simultaneous 95% CI
Camera: 0.409 → 0.312
Unedited → response | 27 tasks, 96 pairs
Sensor: 0.209 → 0.199
Unedited → response | 30 tasks, 120 pairs
Unedited
Clean basis
Random basis
0
0.05
0.10
0.15
0.01
0.02
Command-error reduction: control − response (command units; separate horizontal scales)