


1







2

3


4




电源

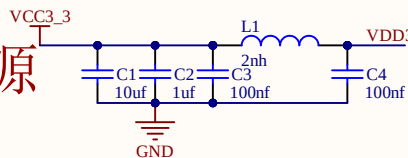

串口0调试接口

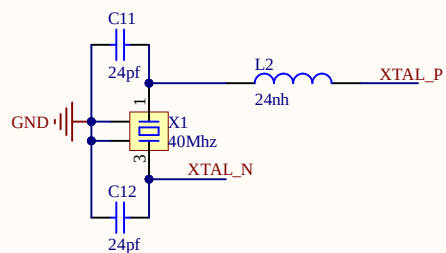


晶振

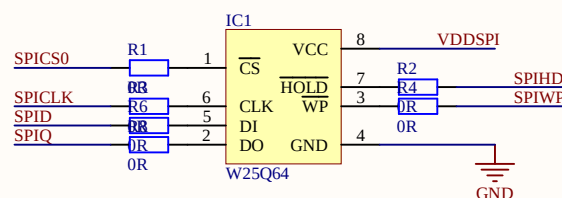






串联电阻请靠近ESP32-S3芯片侧

FLASH




LED

启动

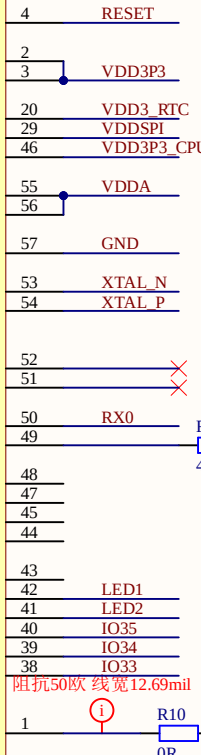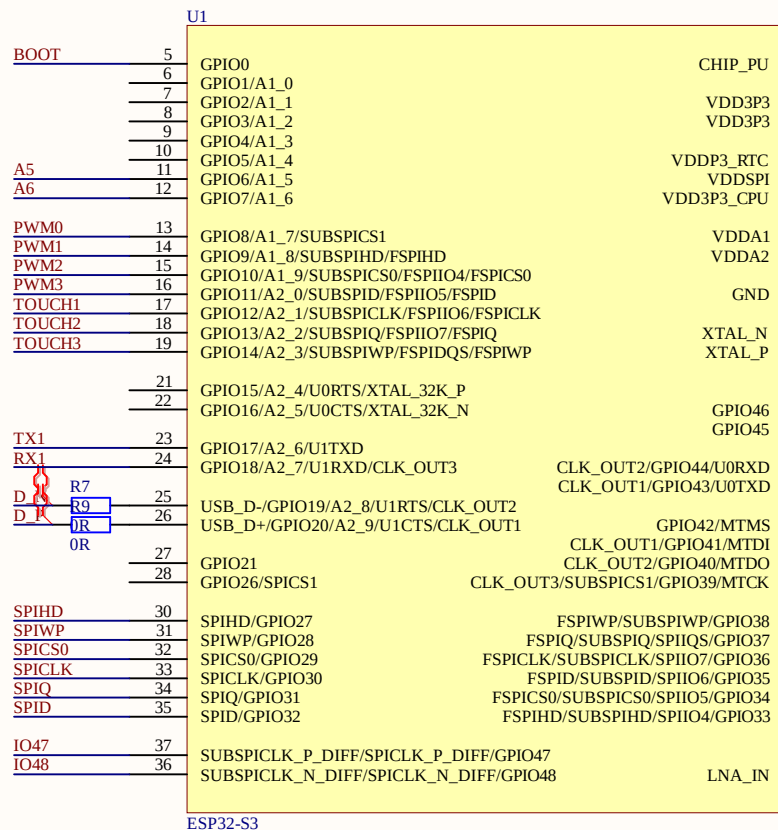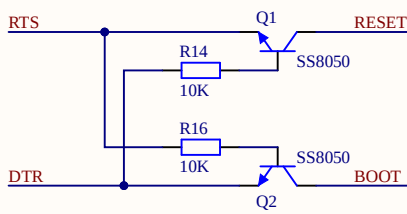

GPIO45默认就是下拉 SPIVDD
从VDDRTC来的
下拉就是3.3V
GPIO46是启动方式的第二个脚

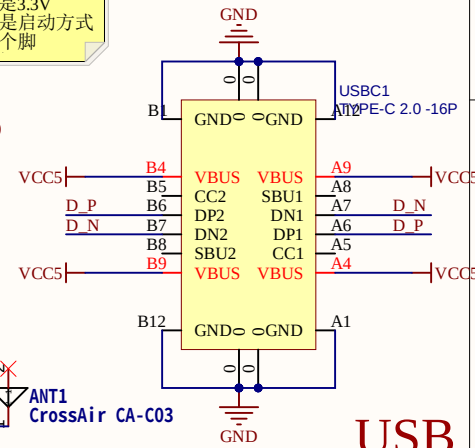

USB


Title		
Size	Number	Revision
A4		
Date:	5-16-2026	Sheet of
File:	C:\Users\...\esp32-s3.SchDoc	Drawn By:

1


2

3

4

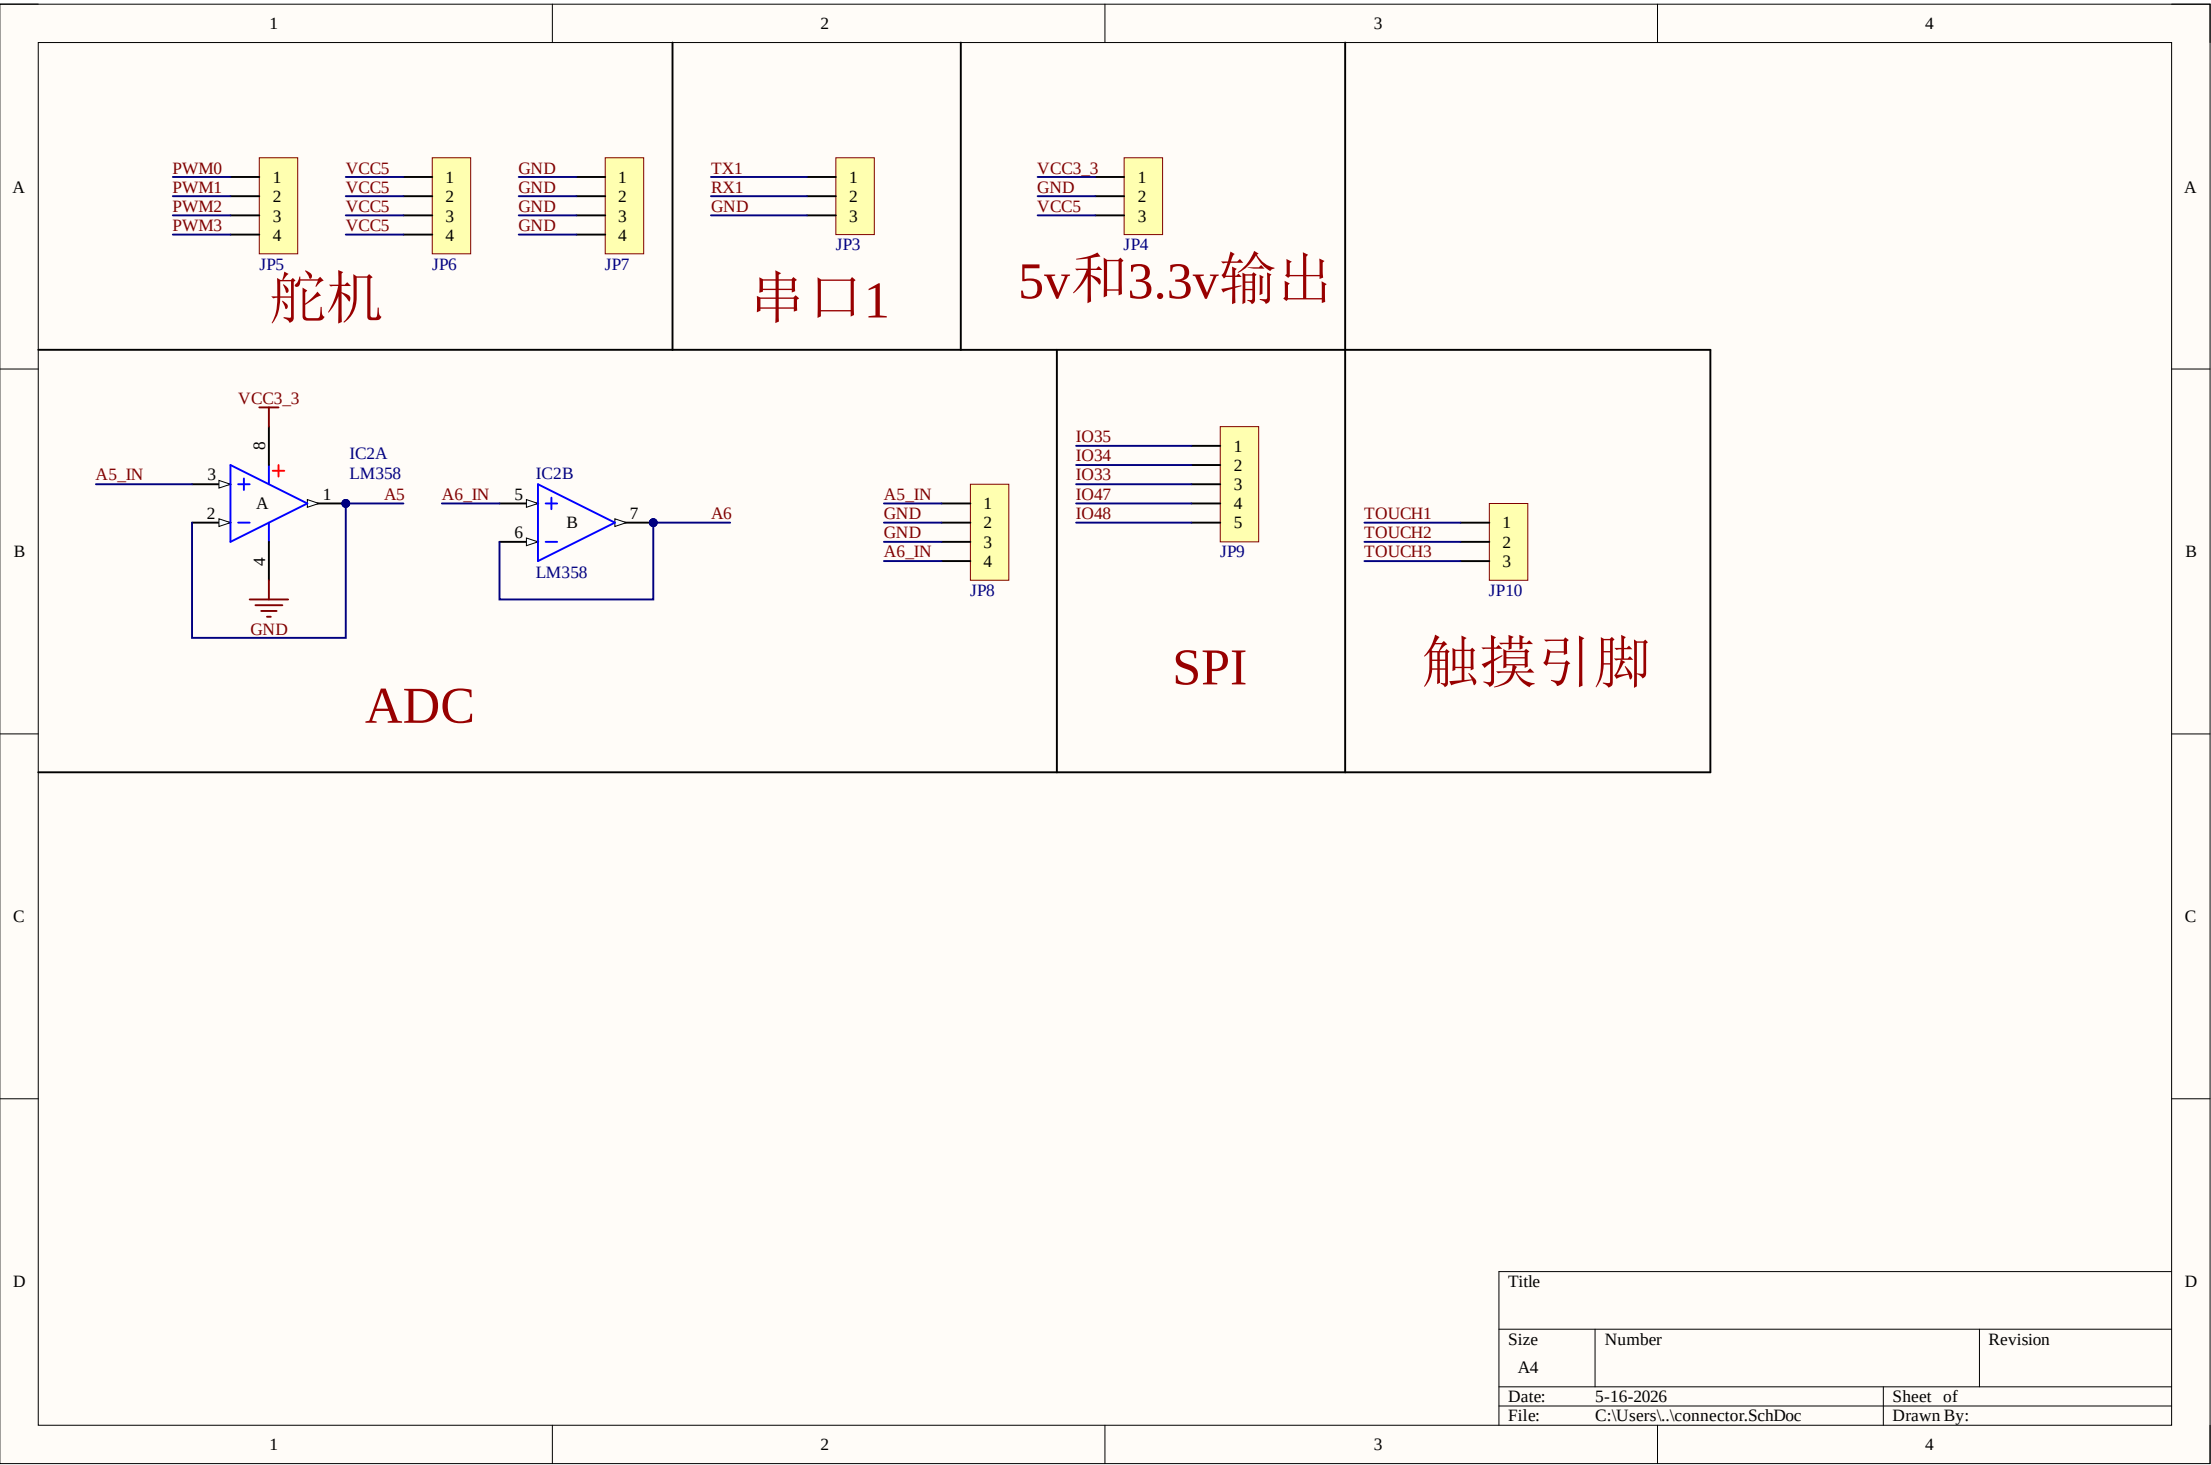

舵机

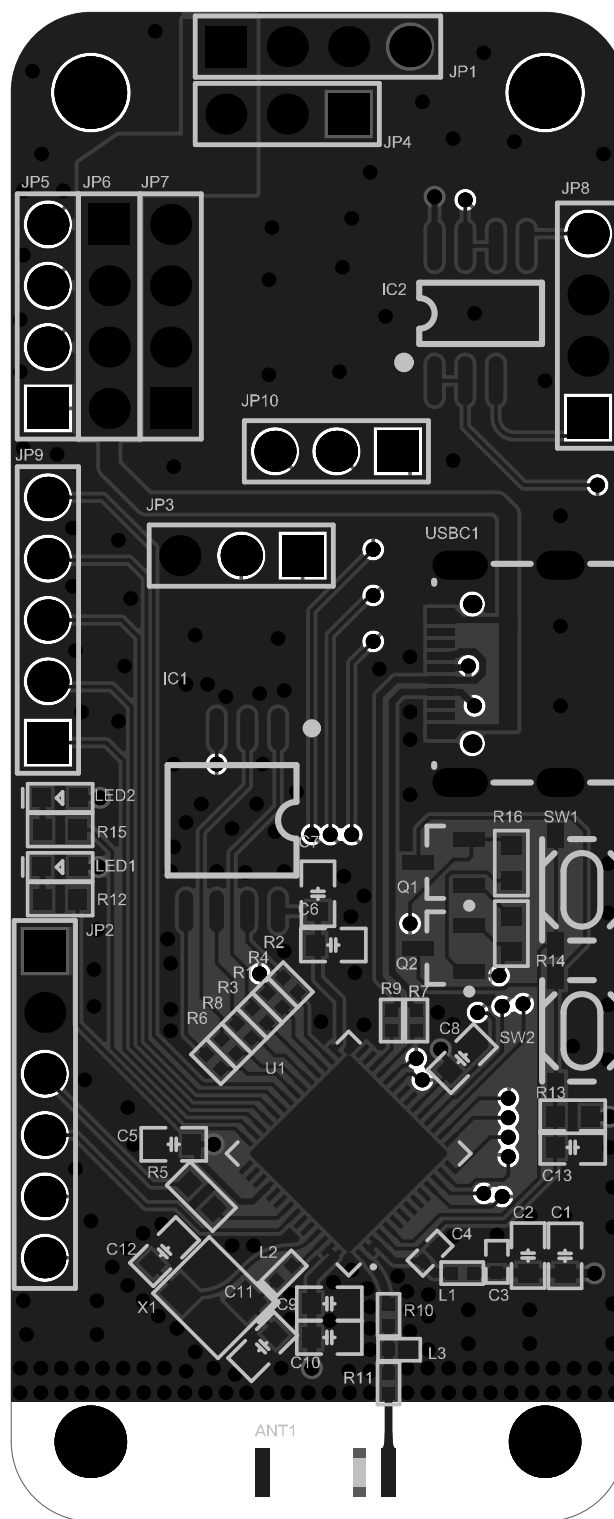

Board Stack Report