

FLASHNET

Proxmox Server Documentation

PREPARED BY: Ayaan Jamal

DATE: 18TH February 2026

This documentation explains how Proxmox Virtual Environment (Proxmox VE) is used to deploy virtual machines for organizational use, and how domain user configurations such as software deployment, default browser, and desktop wallpaper are applied using Active Directory Group Policy.

The configurations implemented include:

- Deploying software to domain computers/users
- Setting a default browser
- Setting a default wallpaper for domain accounts

2. Device Information

Device	Model	Function
Switch	Huawei S380-L4P1T	LAN distribution + PoE
Access Point	Huawei AP266	Indoor Wi-Fi
Access Point	Huawei AP326E	



Fig 1.1 Huawei S380-L4P1T



Fig 1.2 Huawei AP326E



Fig 1.3 Huawei AP266

2.1 Device Requirements

- Huawei eKit App installed on phone
- Internet connection on phone (for login)
- Router providing DHCP (or a DHCP server)
- Ethernet cables
- PoE switch ports available

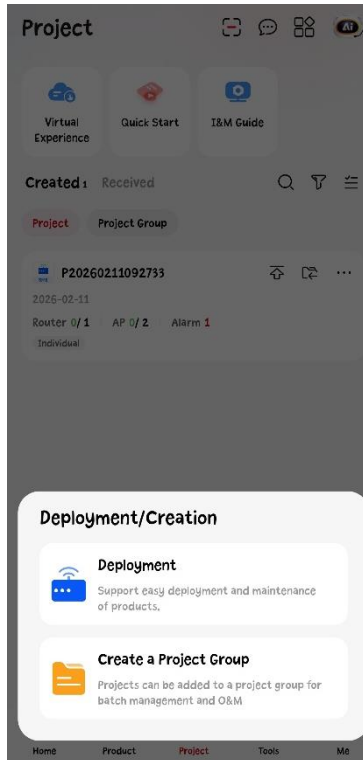


Fig 1.4 Huawei eKit Deployment (before)

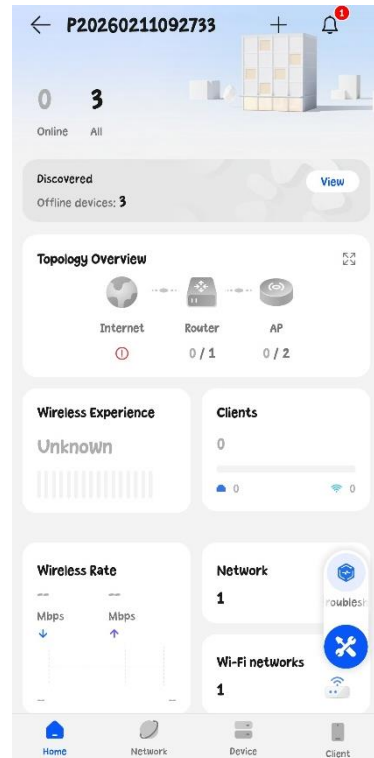


Fig 1.5 Huawei eKit Deloyment (after)

2.2 Connections

Port	Connected To	Purpose
GE0/0/1	Router / Firewall	Uplink + Internet
GE0/0/2	AP266	Wi-Fi coverage
GE0/0/3	AP326E	Wi-Fi coverage

2.3 Adding the Devices (Switch + APs)

2.3.1 Adding the S380-L4P1T Switch

1. In the Site dashboard select **Add Device**
2. Choose **Scan QR Code**
3. Scan the QR code on the switch
4. Confirm device is added to the site

2.3.2 Adding AP266 and AP326E

1. Select **Add Device**
2. Scan QR code on:
 - AP266
 - AP326E
3. Wait for the APs to appear online

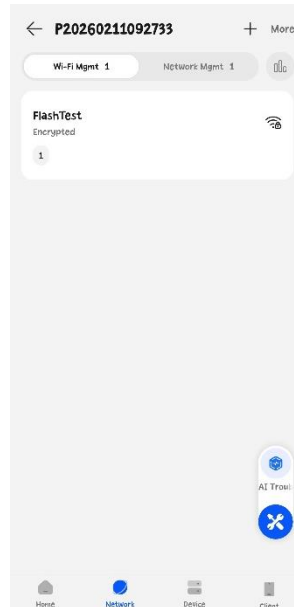


Fig 1.6 Wi-Fi Management Page for Wi-Fi distribution

Topology design Example:

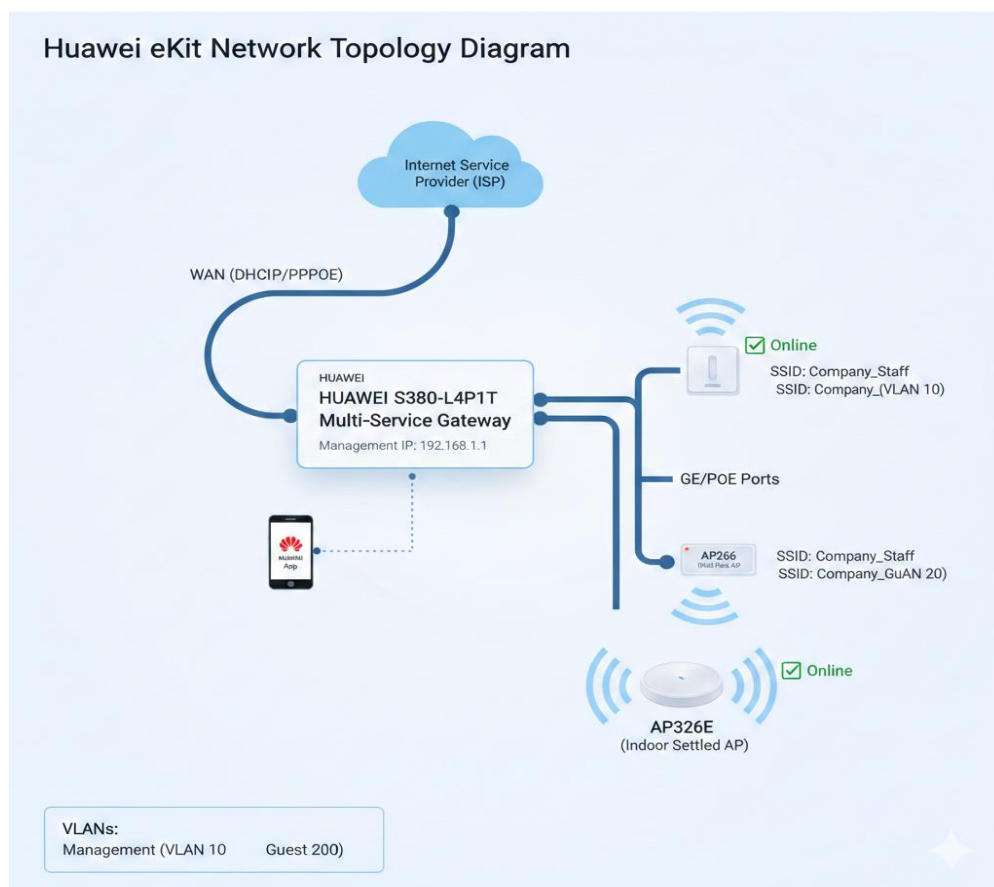


Fig 1.8 Topology example for Enterprises

Customer Support Contacts	
Email	cs@flashnet.co.tz, support@flashnet.co.tz
Call/WhatsApp	+255 22 2113687 (Call), +255-777- 988-883 (WhatsApp)